
Catalog No.	D Dim.	H Dim.	K Dim.	L Dim.	M Dim.	P Dim.	Q Dim.
6250501	1-19/32 in	5/8 in	13/32 in	3/16 in	15/32 in	3/4 in	1/4 in
6250502	1-15/16 in	11/16 in	1/2 in	3/16 in	1/2 in	3/4 in	1/4 in
6250503	2-1/32 in	7/8 in	1/2 in	1/4 in	9/16 in	13/16 in	5/16 in
6250505	2-5/8 in	1-3/16 in	5/8 in	5/16 in	3/4 in	1-1/16 in	3/8 in
6250506	2-5/8 in	1-3/16 in	5/8 in	5/16 in	3/4 in	1-1/16 in	3/8 in
6250507	2-5/8 in	1-3/16 in	5/8 in	5/16 in	3/4 in	1-1/16 in	3/8 in
6250510	3-3/8 in	1-3/8 in	3/4 in	7/16 in	15/16 in	1-3/8 in	1/2 in
6250511	3-3/8 in	1-3/8 in	3/4 in	7/16 in	15/16 in	1-3/8 in	1/2 in
6250513	3-3/4 in	1-13/16 in	15/16 in	15/32 in	1-3/16 in	1-1/2 in	5/8 in
6250514	3-3/4 in	1-13/16 in	15/16 in	15/32 in	1-3/16 in	1-1/2 in	5/8 in
6250515	3-3/4 in	1-13/16 in	15/16 in	15/32 in	1-3/16 in	1-1/2 in	5/8 in
6250516	3-3/4 in	1-13/16 in	15/16 in	15/32 in	1-3/16 in	1-1/2 in	5/8 in
6250519	4-3/8 in	2 in	1-1/8 in	19/32 in	1-3/8 in	1-3/4 in	3/4 in
6250520	4-3/8 in	2 in	1-1/8 in	19/32 in	1-3/8 in	1-3/4 in	3/4 in
6250521	5-7/32 in	2-3/16 in	1-3/16 in	3/4 in	1-9/16 in	2-1/16 in	7/8 in
6250522	5-7/32 in	2-3/16 in	1-3/16 in	3/4 in	1-9/16 in	2-1/16 in	7/8 in
6250523	5-7/32 in	2-3/16 in	1-3/16 in	3/4 in	1-9/16 in	2-1/16 in	7/8 in
6250524	5-7/32 in	2-3/16 in	1-3/16 in	3/4 in	1-9/16 in	2-1/16 in	7/8 in
6250527	6-1/16 in	2-7/8 in	1-3/4 in	7/8 in	2 in	2-7/16 in	1-1/8 in
6250528	6-1/16 in	2-7/8 in	1-3/4 in	7/8 in	2 in	2-7/16 in	1-1/8 in
6250529	6-1/16 in	2-7/8 in	1-3/4 in	7/8 in	2 in	2-7/16 in	1-1/8 in
6250533	8-1/2 in	3-1/4 in	2-1/16 in	1-3/32 in	2-5/16 in	2-13/16 in	1-3/8 in
6250534	8-1/2 in	3-1/4 in	2-1/16 in	1-3/32 in	2-5/16 in	2-13/16 in	1-3/8 in

Jaw & Eye Turnbuckles, C-786-G

MADE IN THE USA

- Drop-Forged Carbon Steel
- Galvanized to Meet ASTM A-153 Specifications
- 5 to 1 Design Factor
- See Figure C-780-G for Eye Dimensions
- See Figure C-788-G for Jaw Dimensions
- Jaws on Sizes 1/4" Through 5/8" Have Hex Head Bolt and Nut; Jaws on Sizes 3/4" Through 1-1/2" Have Cotter Key and Bolt
- IMPORTANT: Instructions For Use
- Turnbuckles are Designed for a Static Load
- In Loads Where There is Vibration, Lock Nuts (Jam Nuts) Should be Used to Prevent the Connection from Turning or Loosening
- DO NOT EXCEED THE WORKING LOAD LIMIT

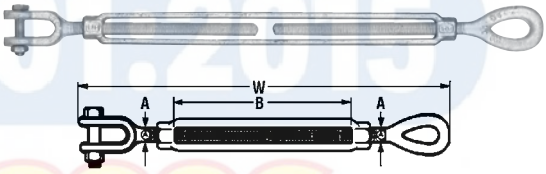

Catalog No.	UPC No. 020418	Finish	Working Load Limit	Thread Diameter (A)	Take Up (B)	Closed Position Length (W)	Weight Each
6250403	087400	Hot Galvanized	1200 lb	3/8 in	6 in	11-9/16 in	0.90 lb
6250405	087417	Hot Galvanized	2200 lb	1/2 in	6 in	13-1/8 in	1.64 lb
6250406	087424	Hot Galvanized	2200 lb	1/2 in	9 in	16-1/8 in	2.08 lb
6250407	087431	Hot Galvanized	2200 lb	1/2 in	12 in	19-1/8 in	2.57 lb
6250409	087448	Hot Galvanized	3500 lb	5/8 in	6 in	14-7/8 in	2.65 lb
6250427	087592	Hot Galvanized	15200 lb	1-1/4 in	12 in	28-9/16 in	19.80 lb