
OPEN SPELTER SOCKET BOLT/NUT TYPE

SPECIFICATION



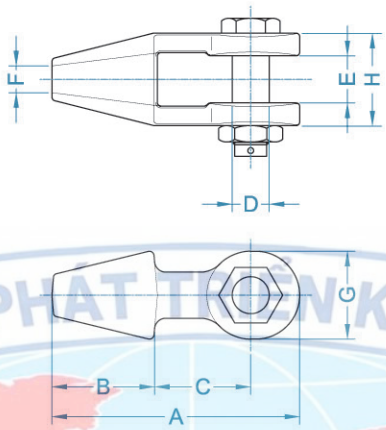

Product Code	Size (mm)	SWL(WLL) (ton)	Dimension(mm)								Weight (kg)
			A	B	C	D	E	F	G	H	
SKOB-001	16	2.6	171	74	65	25	32	20	57	64	1.7
SKOB-002	18	3.3	202	90	78	28	38	23	66	72	2.6
SKOB-003	20	4.1	202	90	78	31	38	25	66	72	2.8
SKOB-004	22	5.1	235	100	93	34	45	30	80	85	4.4
SKOB-005	24	5.9	268	112	105	37	51	32	95	100	7.1
SKOB-006	25	6.9	268	112	105	40	51	33	95	100	7.7
SKOB-007	28	8	294	122	117	43	57	36	105	111	9.2
SKOB-008	30	9.2	294	122	117	46	57	38	105	111	9.7
SKOB-009	32	10.5	329	134	131	49	64	40	121	126	14.4
SKOB-010	34	11.5	329	134	131	52	64	42	121	126	14.5
SKOB-011	36	13	384	154	156	55	76	44	137	144	22.7
SKOB-012	38	14.5	384	154	156	58	76	47	137	144	24.1

- Material : Forged carbon steel
- Proof Load : SWL×2, Breaking Load : SWL×5
- Surface : Self Color or, Hot Dip Galv.
- Reference : Federal specification RR-S-550D
  Japanese Industrial Standard JIS F 3432
- 16~20MM" size spelter socket have only 1 groove, 22MM~38MM" size have two groove.
- Available certificate of NDT (M/T, U/T), 3rd party Inspection test report.
- Special size, design and, another material will can supply as your requirement.

CÔNG TY CỔ PHẦN PHÁT TRIỂN KINH TẾ ĐÔNG NAM Á
ASEAN JSC.VN
ASEAN DEVELOPMENT JOINT STOCK COMPANY
ISO 9001:2015
since 2006

 Copyright © 2018 DAICHANG MARINE TECH CO.,LTD. All Right Reserved