
CLOSED SPELTER SOCKET

SPECIFICATION



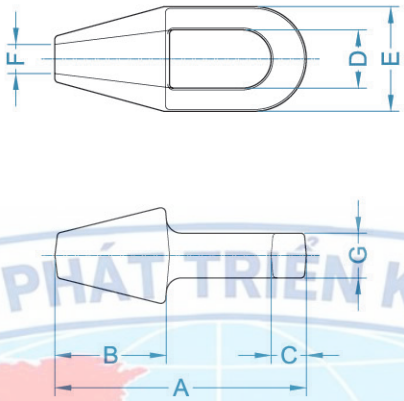

Product Code	Size (inch)	SWL(WLL) (ton)	Dimension(mm)							Weight (kg)
			A	B	C	D	E	F	G	
SKCL-001	5/16~3/8	2	125	57	15.5	25	43	13	17.5	0.4
SKCL-002	7/16~1/2	3	140	65	17	29	50	14	22	0.7
SKCL-003	9/16~5/8	5	161	74	21	36	67	18	25	1.5
SKCL-004	3/4	7	194	90	27	42	76	22	32	2.1
SKCL-005	7/8	10	223	100	32	48	92	25	38	3.5
SKCL-006	1	12	250	112	35	58	104	29	45	5
SKCL-007	1-1/8	15	279	124	38	65	114	32	51	6.8
SKCL-008	1-1/4~1-3/8	20	308	147	42	70	127	38	57	9.9
SKCL-009	1-1/2	25	354	160	49	81	137	42	60	12.9
SKCL-010	1-5/8	30	384	165	54	82	146	44	70	16
SKCL-011	1-3/4~1-7/8	40	438	190	56	96	172	51	76	24
SKCL-012	2~2-1/8	50	505	216	62	110	194	57	83	34
SKCL-013	2-1/4~2-3/8	65	546	228	70	128	216	67	92	45
SKCL-014	2-1/2~2-5/8	80	597	248	80	140	240	73	102	64
SKCL-015	2-3/4~2-7/8	90	645	280	80	158	272	80	124	100
SKCL-016	3~3-1/8	100	689	305	86	170	292	86	134	125
SKCL-017	3-1/4~3-3/8	120	743	330	103	184	312	92	146	142
SKCL-018	3-1/2~3-5/8	140	788	356	102	200	330	100	160	180

- Material : 1/2~1-1/2" (Forged carbon steel), 1-5/8"~3-1/2" (Cast alloy steel)
- Proof Load : SWL×2, Breaking Load : SWL×5
- Surface : Self Color or, Hot Dip Galv.
- Reference : Federal specification RR-S-550D
- 1/2"~3/4" size spelter socket have only 1 groove, 7/8"~1-1/2" size have two groove and, 1-5/8"~3-1/2" size have three groove.
- Available certificate of NDT (M/T, U/T), 3rd party Inspection test report.
- Special size, design and, another material will can supply as your requirement.

CÔNG TY CỔ PHẦN PHÁT TRIỂN KINH TẾ ĐÔNG NAM Á
ASEAN JSC.VN
ASEAN DEVELOPMENT JOINT STOCK COMPANY
ISO 9001:2015
Since 2006

Copyright © 2018 DAICHANG MARINE TECH CO.,LTD. All Right Reserved