
WEDGE SOCKET

SPECIFICATION



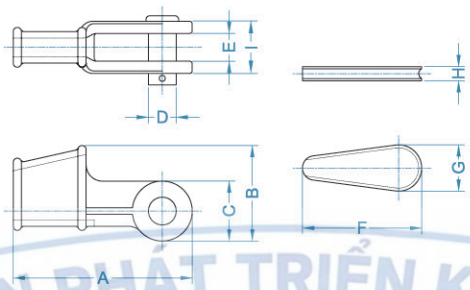



- Material : Casting Steel (Cast alloy steel)
- Proof Load : SWL×2,
  Breaking Load : SWL×5
- Surface : Body & Wedge : Painted orange
  Pin : Electric plated
- Reference : Federal specification RR-S-550D
- Special size, design and, another material will can supply as your requirement

Product Code	Size (inch)	SWL(WLL) (ton)	Dimension(mm)									Weight (kg)
			A	B	C	D	E	F	G	H	I	
SKWG-001	3/8	1.5	150	81	46	20.5	21	75	36	12	43	1.5
SKWG-002	1/2	2.5	177	107	56	25.5	28	110	48	15	54	2.4
SKWG-003	5/8	3.5	215	128	66	30	34	130	60	20	64	4
SKWG-004	3/4	5	259	149	75	35	41	150	68	22	76	7.7
SKWG-005	7/8	7	298	166	90	41.5	44	160	68	24	84	10.4
SKWG-006	1	8.5	325	181	110	50.5	51	170	80	28	97	13.1
SKWG-007	1-1/8	10.5	370	205	112	57	56	200	90	30	110	19.9
SKWG-008	1-1/4	12.5	410	225	126	63.5	65	219	95	33	125	28
SKWG-009	1-3/8	14	480	264	156	63.5	70	250	114	40	130	41.7
SKWG-010	1-1/2	18	553	285	165	70	75	294	128	44	135	49.5
SKWG-011	1-5/8	21	618	311	176	76	76	310	124	45	142	68.9

BOOM PENDANT SOCKET

SPECIFICATION



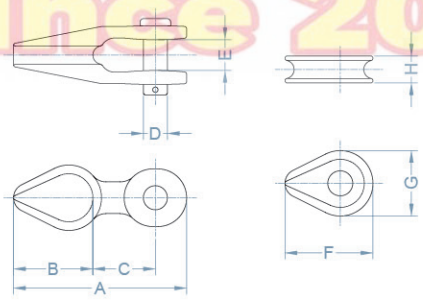

- Material : Casting Steel (Cast alloy steel)
- Proof Load : SWL×2,
  Breaking Load : SWL×5
- The boom pendant socket should be applicate 6~8 Strand wire rope of designated size.

Product Code	Size (mm)	SWL(WLL) (ton)	Dimension(mm)								Weight (kg)
			A	B	C	D	E	F	G	H	
SKBP-001	32 ~ 35	12.5	384	185	128	50	63	185	152	53	23.5
SKBP-002	38	18	432	205	143	50	75	207	170	63	33.5

Copyright © 2018 DAICHANG MARINE TECH CO.,LTD. All Right Reserved