
MASTER LINK

SPECIFICATION






- Material : Forged Alloy Steel
- Proof Load : SWL×2, Breaking Load : SWL×5
- Surface : Painted Orange
- Reference : ASTM A952
- When used as a chain sling, follow the load of the chain taking into consideration the angle of the sling and the like.

Product Code	Size (inch)	SWL(WLL) (ton)	Dimension(mm)					Weight (kg)
			A	B	C	D	E	
LKML-001	1/2	2.8	12.5	62	87	125	150	0.4
LKML-002	5/8	4	16	76	108	152	184	0.7
LKML-003	3/4	5.6	19	70	108	140	178	0.9
LKML-007	7/8	6.8	22.5	95	140	162	207	1.5
LKML-004	1	11	25	90	140	178	228	2.1
LKML-005	1-1/4	16.4	32	111	175	222	286	4.2
LKML-006	1-1/2	24.5	38	133	209	267	343	7.2
LKML-008	1-3/4	38	45	150	240	300	390	11.4
LKML-009	2	46	51	170	272	340	442	16.6
LKML-010	2-1/4	65	58	200	316	400	516	24.8

CONNECTING MASTER LINK

SPECIFICATION



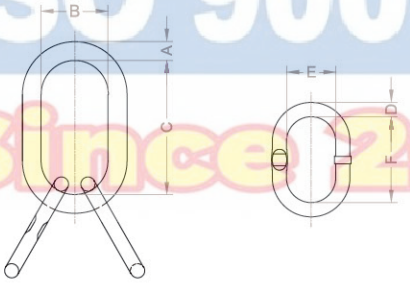

- Material : Forged Alloy steel
- Test Load : Proof Load = SWL (WLL) × 2, Breaking Load = SWL (WLL) × 5
- Surface : Orange painted
- The others : SWL depends on the sling angle when using chain sling

Product Code	Size (inch)	SWL(WLL) (ton)	Dimension(mm)						Weight (kg)
			A	B	C	D	E	F	
LKCM-003	1-1/4	16.4	32	111	222	25	88	150	7.9
LKCM-005	1-1/2	24.5	38	133	267	32	112	192	14.9

※ Other sizes are order made as per request

CÔNG TY CỔ PHẦN PHÁT TRIỂN KINH TẾ ĐÔNG NAM Á
ASEAN JSC.VN
ASEAN DEVELOPMENT JOINT STOCK COMPANY
ISO 9001:2015
Since 2009

Copyright © 2018 DAICHANG MARINE TECH CO.,LTD. All Right Reserved