
W-ABA

4:1 | -40° 200°C | 400°C max. | DGUV TEST | DNV TEST

Lifting point that can be loaded on all sides.

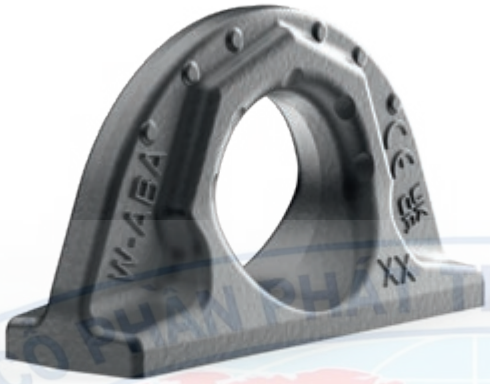

PRODUCT FEATURES

- Large WLL range 0.8 t – 31.5 t.
- Forged from a single piece, no rattling noise or shaking even with strong vibrations, easy hinging of the lifting means possible.
- The weld arrangement (circular fillet weld) fulfils the requirements of DIN EN 1090, i.e. the endless weld seam prevents the formation of contact/crevice corrosion (thus suitable for outdoor constructions).
- Innovative wear markings for easy determination of wear.

Forged from a single piece.




Clear marking of the minimum WLL.




Circular fillet weld.



WLL angle in load ring plane.

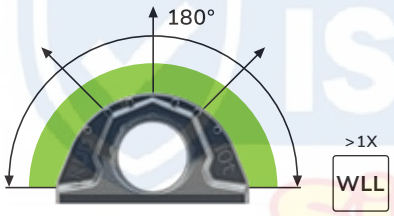


WLL angle for side loading.

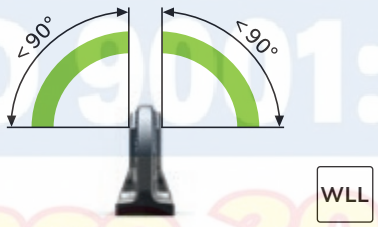

Innovative wear markings.

Ready to be discarded. New.

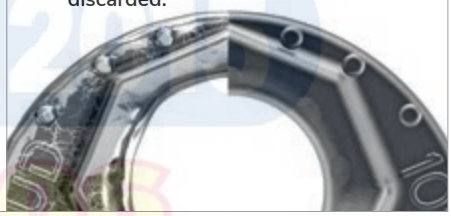

DGUV Test
OA 1951042
Sicherheit geprüft
tested safety
dguv.de/pruefzeichen

✓ Tested and certified by DGUV.

Test criteria: GS-OA-15-04
Certificate no.: OA 1951042

- 4-times the safety against breakage.
- Innovative wear markings inside and out.
- Tempered main body, making it more wear resistant.

p. 124–125