
INOX-ABA

4:1 -40° 250°C 250°C max. DNV TEST

Lifting point that can be loaded on all sides. Non-rust and corrosion-resistant.

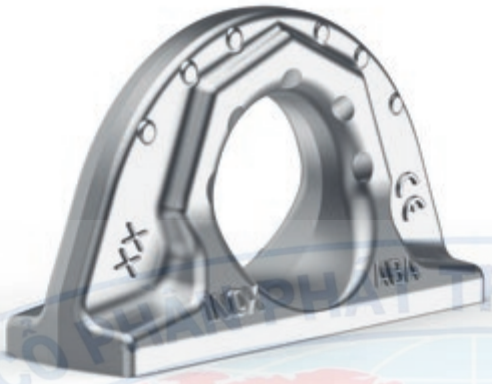


PRODUCT FEATURES

- Made from Duplex steel 1.4462.
- 4-times the safety against breakage.
- Forged from a single piece: no rattling noise or shaking.
- Fulfils DIN EN 1090 due to circular fillet weld: No contact / crevice corrosion – can be used outdoors.
- Innovative wear markings for easy determination of the discard age.


Circular fillet weld.



WWL angle in load ring plane.



WWL angle for side loading.



Innovative wear markings.

Ready to be discarded. New.




INOX-ABA – RUST-FREE WELD-ON POINT THAT CAN WITHSTAND LOADS ON ALL SIDES.

Type	WLL [t]	Weight [kg/unit]	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	Welding seam	Ref. No.
INOX-ABA-0.8t	0.8	0.2	38	22	12	70	32	12	50	a3	7912396
INOX-ABA-1.6t	1.6	0.45	41.5	30	16	100	35	16	57	a4	7912397
INOX-ABA-2.7t	2.7	1.1	59	41	23	137	50	21	80	a6	7912398

Subject to technical changes!

INOX-ABA

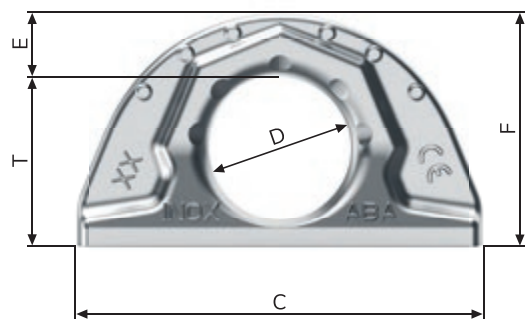

INOX-ABA



p. 126 p. 127