G-ABA

4:1 | -40° 100°C | 350°C max.

Lifting point that can be loaded on all sides.
Ideal for galvanisation and hot dip galvanising.




PRODUCT FEATURES

- Ideal for galvanising or hot-dip galvanising after welding.
- 4-times the safety against breakage.
- Forged from a single piece: no rattling noise or shaking.
- Fulfils DIN EN 1090 due to circular fillet weld:
  No contact/crevice corrosion - can be used outdoors.
- Innovative wear markings for easy determination of the discard age.


Forged from a single piece.



WWL angle in load ring plane.



WWL angle for side loading.



Circular fillet weld.




G-ABA – WELD-ON POINT THAT CAN WITHSTAND LOADS ON ALL SIDES.

Type	WLL [t]	Weight [kg/unit]	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	Welding seam	Ref. No.
G-ABA-1t	1	0.55	41.5	32	18	104	35	18	59	a4	7913870
G-ABA-2.5t	2.5	1.36	59	41	29	137	50	21	80	a6	7913871
G-ABA-4t	4	2.93	71.5	59	35	176	60	27.5	99	a7	7913872

Subject to technical changes!

G-ABA

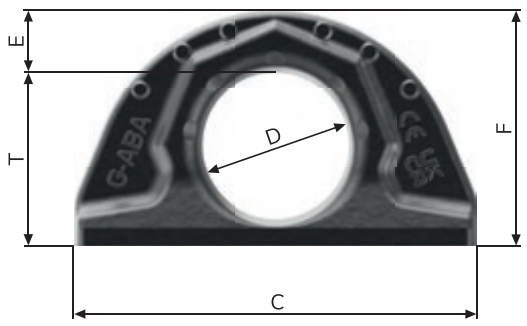

G-ABA

