PP-S / PP-B / PP-VIP

PowerPoint®-Star / -Eye connection / -VIP-Chain connection.


RUD RFID CONNECT IT



PP-S PP-B PP-VIP

PRODUCT FEATURES

- Large WLL range 0.63 t–8 t.
- PP-S: universal connection with hook for ring suspensions, round slings, wire ropes, hook suspensions.
- PP-B: eye connection for hook suspension.
- PP-VIP: direct chain connection.
- So-PP-S, So-PP-B, So-PP-VIP: variable thread lengths.
- Rotatable 90° to the bolt-on direction under WLL.
- Lowest kinking possibility due to cardan joint.
- PP-VIP, So-PP-VIP: universal and non-mix-up clevis connection for easy construction with chains, hooks and eye.
- PP-S, So-PP-S: The shape of the hook tip prevents hinging in small openings and the WLL on the hook tip.
- PP-S: Robust forged safety latch.

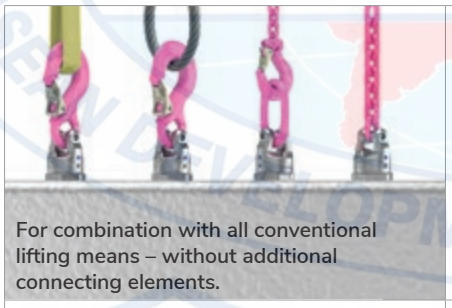



For combination with all conventional lifting means – without additional connecting elements.

Double ball bearing – rotating and turning under load.



Rotatable through 360°.






Large clearance between the bolt-on surface and load.

90° rotatable through the bolt-on direction – low kinking possibility.



Extended pivoting area ~230°.



DGUV Test OA 1951040 Sicherheit geprüft tested safety dguv.de/pruefzeichen

✓ Tested and certified by DGUV.

Test criteria: GS-OA-15-04: 2015-12
Certificate no.: OA 1951040

- 360° rotatable, 230° pivotable.
- Double ball bearing for tilting, rotating and turning under load.
- Universal, non-mix-up VIP connection for chains, hooks and eyes.