ACP-TURNADO SUPERMAX

Automatic-Center-Point.

4:1 | lbs 5:1 | 180° | 360° | VARIO | UNC | M | BLUE-ID | 350°C max. | -40° 100°C | ASME B30.26

RUD RFID CONNECT IT



PRODUCT FEATURES

- Innovative spring mechanism – prevents the lift bail from stopping with transverse load.
- Swivel joint in the lifting ring axis.
- Wear lenses for checking discard criteria.
- Integrated RFID transponder to make checks easier.
- Design factors 4:1 and 5:1.
- Fulfils the requirements of the American standard ASME B30.26.
- Deflector disc with angle marking, WLL information in “t” and “lbs”, design factors and torque moment.
- Threaded pin – firmly connected.
- Free space for individual marking / stamp.

ASEAN JSC.VN

Innovative internal spring mechanism.





Swivel joint in the lifting ring axis.



Deflector disc with angle marking.

Combination head bolt with internal and external hexagon.



Innovative wear markings.



RFID connected (as standard).



RUD RFID CONNECT IT

ACP-TURNADO SUPERMAX

Metric thread / metric thread in variable length.

ACP-TURNADO SUPERMAX – METRIC.

Type	WLL [t]	Weight (kg/unit)	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	K [mm]	M	N [mm]	T [mm]	Tightening torque [Nm]	Ref. No.
ACP-TURNADO-SUPERMAX-32.5t-M64	32.5	17.2	123.5	45	45	103	95	80	108	188	75	204	M64	24	232	2,000	7912633
ACP-TURNADO-SUPERMAX-32.5t-M72	32.5	18.2	123.5	45	45	103	95	90	108	198	75	204	M72	24	232	2,000	7912634
ACP-TURNADO-SUPERMAX-32.5t-M80	32.5	19.3	123.5	45	45	103	95	100	108	208	75	204	M80	24	232	2,000	7912635
ACP-TURNADO-SUPERMAX-32.5t-M90	32.5	21.5	123.5	45	45	103	110	113	116	229	75	204	M90	24	240	2,000	7912636
ACP-TURNADO-SUPERMAX-32.5t-M100	32.5	23.8	123.5	45	45	103	110	125	116	241	75	204	M100	24	240	2,000	7912637

Subject to technical changes!


ACP-TURNADO SUPERMAX – METRIC THREAD IN VARIABLE LENGTH.

Type	WLL [t]	Weight (kg/unit)	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F vario [mm]	G [mm]	H vario [mm]	I [mm]	K [mm]	M	N [mm]	T [mm]	Tightening torque [Nm]	Ref. No.
ACP-TURNADO-SUPERMAX-32.5t-M64	32.5	[1]	123.5	45	45	103	95	64–300	108	172–408	75	204	M64	24	232	2,000	8600649
ACP-TURNADO-SUPERMAX-32.5t-M72	32.5	[1]	123.5	45	45	103	95	72–300	108	180–408	75	204	M72	24	232	2,000	8600649
ACP-TURNADO-SUPERMAX-32.5t-M80	32.5	[1]	123.5	45	45	103	95	80–300	108	188–408	75	204	M80	24	232	2,000	8600649
ACP-TURNADO-SUPERMAX-32.5t-M90	32.5	[1]	123.5	45	45	103	110	90–300	116	206–416	75	204	M90	24	240	2,000	8600649
ACP-TURNADO-SUPERMAX-32.5t-M100	32.5	[1]	123.5	45	45	103	110	100–300	116	216–416	75	204	M100	24	240	2,000	8600649


[1] Weight depends on the design.

Subject to technical changes!


ACP-TURNADO SUPERMAX

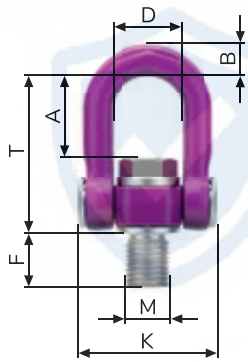


ACP-TURNADO SUPERMAX




ACP-TURNADO SUPERMAX – vario length

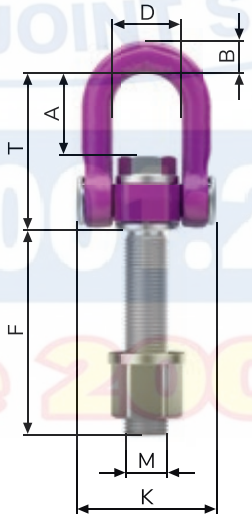


ACP-TURNADO SUPERMAX – vario length

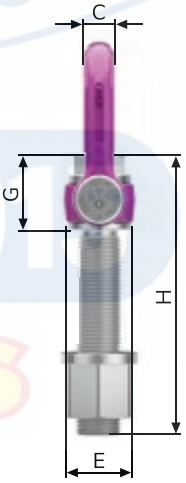

ACP-TURNADO SUPERMAX



ACP-TURNADO SUPERMAX – vario length



ACP-TURNADO SUPERMAX

UNC inch thread / UNC inch thread in variable length.

ACP-TURNADO SUPERMAX – UNC INCH THREAD.

Type	WLL [t]	Weight (kg/unit)	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	K [mm]	M	N [mm]	T [mm]	Tightening torque [Nm]	Ref. No.
ACP-TURNADO-SUPERMAX-32.5t-2 1/2"-4UNC	32.5	17.2	123.5	45	45	103	95	79	108	187	75	204	2 1/2"-4UNC	24	232	2,000	7912639
ACP-TURNADO-SUPERMAX-32.5t-3"-4UNC	32.5	18.7	123.5	45	45	103	95	95	108	203	75	204	3"-4UNC	24	232	2,000	7912640
ACP-TURNADO-SUPERMAX-32.5t-3 1/2"-4UNC	32.5	21.5	123.5	45	45	103	110	111	116	227	75	204	3 1/2"-4UNC	24	240	2,000	7912641
ACP-TURNADO-SUPERMAX-32.5t-4"-4UNC	32.5	24	123.5	45	45	103	120	127	116	243	75	204	4"-4UNC	24	240	2,000	8600649

Subject to technical changes!


ACP-TURNADO SUPERMAX – UNC INCH THREAD IN VARIABLE LENGTH.

Type	WLL [t]	Weight (kg/unit)	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F vario [mm]	G [mm]	H vario [mm]	I [mm]	K [mm]	M	N [mm]	T [mm]	Tightening torque [Nm]	Ref. No.
ACP-TURNADO-SUPERMAX-32.5t-2 1/2"-4UNC	32.5	[1]	123.5	45	45	103	95	63.5–300	108	171.5–408	75	204	2 1/2"-4UNC	24	232	2,000	8600649
ACP-TURNADO-SUPERMAX-32.5t-3"-4UNC	32.5	[1]	123.5	45	45	103	95	76–300	108	184–408	75	204	3"-4UNC	24	232	2,000	8600649
ACP-TURNADO-SUPERMAX-32.5t-3 1/2"-4UNC	32.5	[1]	123.5	45	45	103	110	89–300	116	205–416	75	204	3 1/2"-4UNC	24	240	2,000	8600649
ACP-TURNADO-SUPERMAX-32.5t-4"-4UNC	32.5	[1]	123.5	45	45	103	120	102–300	116	218–416	75	204	4"-4UNC	24	240	2,000	8600649

[1] Weight depends on the design.

Subject to technical changes!


ACP-TURNADO SUPERMAX

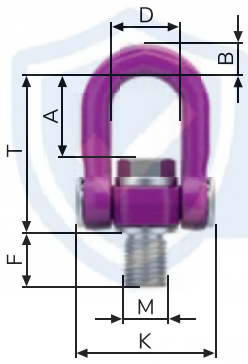


ACP-TURNADO SUPERMAX




ACP-TURNADO SUPERMAX – vario length

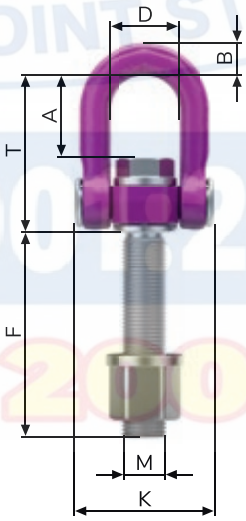

ACP-TURNADO SUPERMAX – vario length

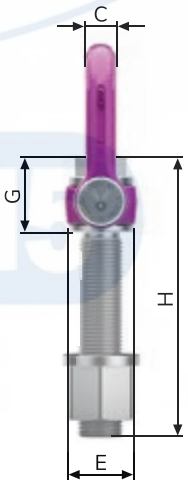

ACP-TURNADO SUPERMAX



ACP-TURNADO SUPERMAX – vario length

