B-ABA

Lifting point that can be loaded on all sides.

RUD RFID CONNECT IT



PRODUCT FEATURES

- Large WLL range 1.6 t – 31.5 t.
- No rattling noise or shaking even with strong vibrations, easy connection of the lifting means possible.
- ICE-Bolt made from patented steel. Safe deep temperature usage; improved toughness meaning higher bending strength and lower wear occurrence.
- Innovative wear markings inside and out.
- Clear marking of the minimum WLL.



✓ Tested and certified by DGUV.

Test criteria: GS-HM-36:2021-09
Certificate no.: HM 220054

- Can be loaded from all sides.
- 4-times the safety against breakage.
- Tempered main body, making it more wear resistant.

B-ABA


Metric thread.

B-ABA – LIFTING POINT THAT CAN BE LOADED ON ALL SIDES – METRIC.

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	L [mm]	M	Tightening torque [Nm]	Ref. No.
B-ABA-1.6t	1.6	0.88	46.5	75	16	100	35	16	62.5	55	55	13	4 x M10	55	7906266
B-ABA-3.2t	3.2	2	65	92	23	137	50	21	86	70	75	16	4 x M12	100	7906267
B-ABA-5t	5	4.1	80	113	27	172	60	28	108	84	95	24	4 x M16	240	7906268
B-ABA-10t	10	9.3	105	146	38	228	80	36	141	110	125	25	4 x M20	450	7906269
B-ABA-20t	20	18.8	148	200	52	272	115	40	188	150	75	30	6 x M24	800	7906270
B-ABA-31.5t	31.5	29.5	170	230	64	320	130	50	220	175	87.5	40	6 x M30	950	7906271

Subject to technical changes!


B-ABA-1.6t to 10t

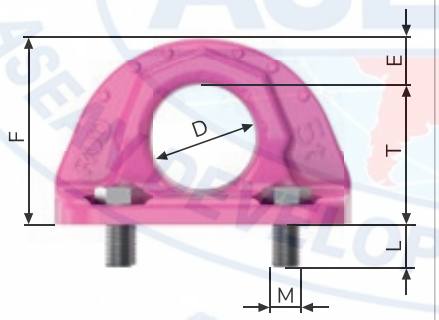


B-ABA-1.6t to 10t



B-ABA-1.6t to 10t

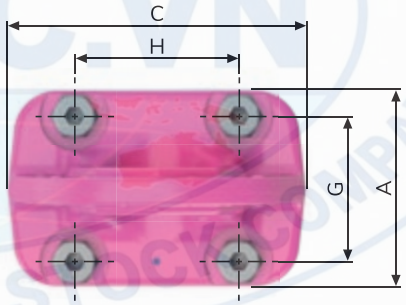

B-ABA-20t to 31.5t

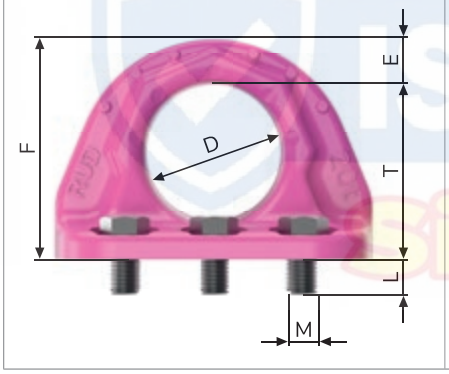

B-ABA-20t to 31.5t



B-ABA-20t to 31.5t

