RBG / VRBG

Load ring thread / VIP-Load ring thread.

4:1 | 180° | M | -20° 100°C | 350°C max. | BLUE-ID | VARIO (1) (2)

RUD RFID CONNECT IT



RBG-3 (1)

VRBG-16 (2)

PRODUCT FEATURES

- Large WLL range 3 t – 16 t.
- Split force introduction thanks to multiple point fixing.
- Bracket can be pivoted through 180°.
- WLL possible up to 90° in load ring plane.
- Clear indication of the minimum WLL for all loading directions.

RBG-3
2 bolts.



Also with vario-length.

VRBG-10 / -16
4 bolts.




Innovative wear markings.



Ready to be discarded. New.


VRBG split force introduction.

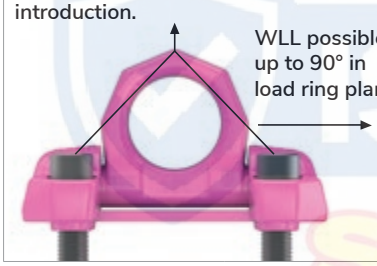

WLL possible up to 90° in load ring plane.

VRBG

Can be pivoted through 180°.



✓ Corresponds with the test criteria of BG/DGUV “GS-HM 36”.

- Split force introduction through several points, going easy on the component.
- WLL up to 16 t.

RBG / VRBG

Metric thread.

RBG – LOAD RING THREAD – METRIC.

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	K [mm]	L [mm]	M	N [mm]	Tightening torque [Nm]	Ref. No.
RBG-3	3	1.07	67	34	16	5	48	22	92	6	18	30	1	178	2 x M16	71	120	51817
RBG-3-SL	3	[1]	67	34	16	5	48	22	92	6	18	25–205	1	178	2 x M16	71	120	8600318

[1] Weight depends on the design.


Subject to technical changes!

VRBG – VIP-LOAD RING THREAD – METRIC.


Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	K [mm]	L [mm]	M	N [mm]	Tightening torque [Nm]	Ref. No.
VRBG-10	10	5.43	103	125	22	6	65	143	78	8	30	50	43	213	4 x M20	100	300	7994537
VRBG-16	16	11.3	131	170	30	8	90	198	104	10	46	70	63	270	4 x M30	134	600	7993255

Subject to technical changes!


RBG-3

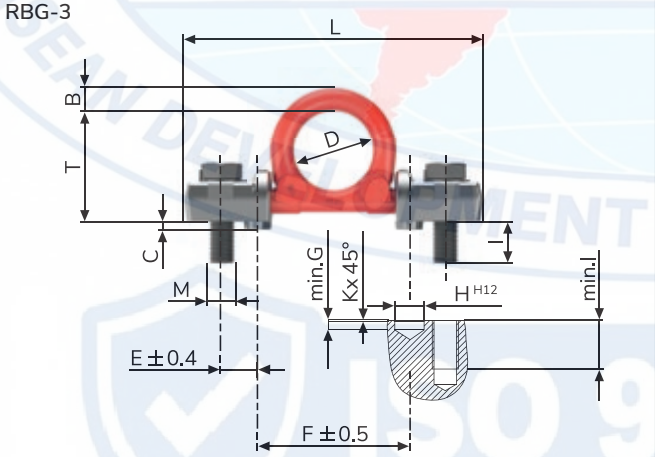


RBG-3

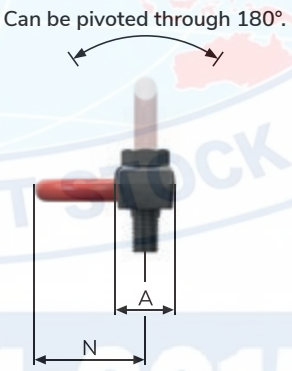

VRBG-10 / -16

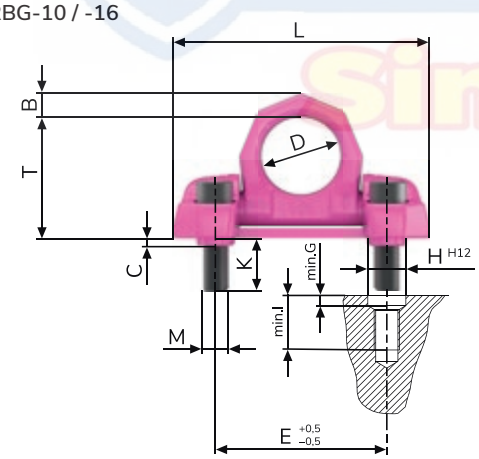

VRBG-10 / -16

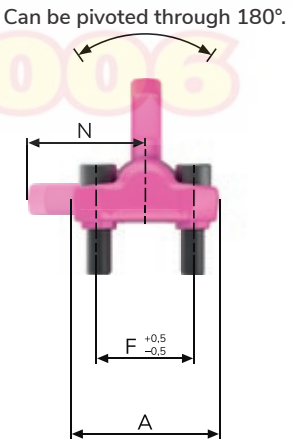

CÔNG TY CỔ PHẦN PHÁT TRIỂN KINH TẾ ASEAN JOINT STOCK COMPANY
ASEAN JSC.VN
ISO 9001:2015
Since 2006