VLBS-U-LT / VLBS-P

4:1 | 180° | -40° 200°C | 400°C max. | DGUV TEST | DNV TEST

VIP-Load ring weldable / VIP-Load ring weldable-captive.



VLBS-U-LT



VLBS-P

PRODUCT FEATURES

- Suspension ring can be pivoted through 180°.
- VLBS-U-LT: Proof of deep temperature ability down to −45° C via notch bar impact test.
- Suspension ring adjustable in the required position (VLBS-U-LT).
- Suspension ring and weld-on block for VLBS-U-LT is captive due to the retaining spring.
- VLBS-P for welding on pipes with a pipe diameter of 80 mm to 220 mm.

VLBS-U-LT up to −45° C.






Clamping spring.


Distance knobs on weld-on block.



Can be loaded 180° in the folding direction.



Can be loaded 180° in the load ring plane.



VLBS-P



VLBS-U-LT / VLBS-P

Technical data.

VLBS-U-LT – VIP-WELDABLE LOAD RING FOR LOW TEMPERATURES.

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Welding seam	Ref. No.
VLBS-U-LT-2.5t	2.5	0.53	75	36	77	27	45	47	16	40	14	HV7 + a3	7903522
VLBS-U-LT-4t	4	0.76	83	42	87	31	51	52	18	46	16	HV8 + a3	7903400
VLBS-U-LT-6.7t	6.7	1.9	117	61	115	44	67	73	24	60	22	HV12 + a4	7903684
VLBS-U-LT-10t	10	2.76	126	75	129	55	67	71	26.5	60	26	HV16 + a4	7903135


Subject to technical changes!

VLBS-P – VIP-LOAD RING WELDABLE PIPES (FOR PIPES Ø 82 – Ø 220 mm).

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Welding seam	Ref. No.
VLBS-P-4t	4	0.8	87	45	87	35	51	52	18	46	16.5	HV13 concave	7995472

Subject to technical changes!


VLBS-U-LT

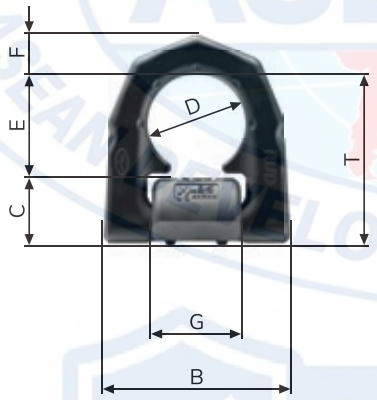


VLBS-U-LT




VLBS-U-LT

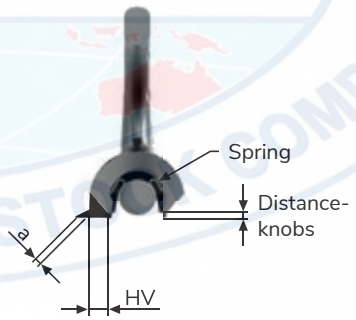

VLBS-P

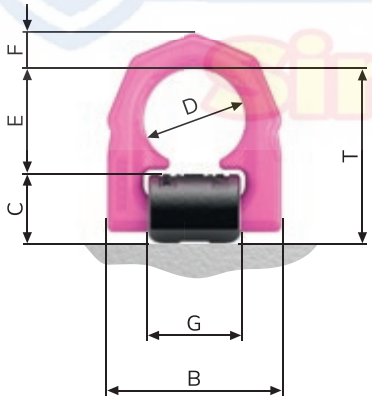

VLBS-P

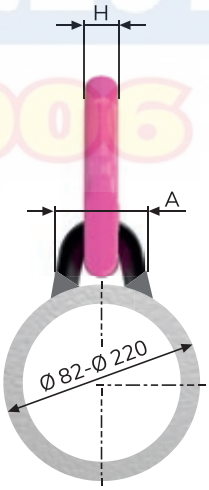

CÔNG TY CỔ PHẦN PHÁT TRIỂN KINH TẾ ĐÔNG Á
ASEAN JSC.VN
ISO 9001:2015
Since 2006