VRBG / VRBG-FIX

Load ring thread / VIP-Load ring thread FIX.

RUD RFID CONNECT IT



VRBG-FIX-31.5t

VRBG-FIX-50t / -100t

PRODUCT FEATURES

- Large WLL range 31.5 t – 100 t.
- Split force introduction thanks to multiple point fixing.
- Suspension ring can be pivoted through 180°.
- WLL possible up to 90° in load ring plane.
- Clear indication of the minimum WLL for all loading directions.

VRBG-FIX-31.5t 6 bolts.	VRBG-FIX-50t 8 bolts.	VRBG-FIX-100t 8 bolts.
VRBG split force introduction. WLL possible up to 90° in load ring plane.	VRBG Can be pivoted through 180°.	Innovative wear markings. Ready to be discarded. New.

✓ Corresponds with the test criteria of BG/DGUV “GS-HM 36”.

- Split force introduction through several points, going easy on the component.
- WLL up to 100 t.

p. 108–109

VRBG / VRBG-FIX


Metric thread.

VRBG / VRBG-FIX – VIP-LOAD RING ON PLATE – METRIC.


Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	K [mm]	L [mm]	M	N [mm]	Tightening torque [Nm]	Ref. No.
VRBG-31.5t	31.5	66.3	265	180	42	42	130	75	120	46	400	6 x M30	195	900	7910387
VRBG-FIX-31.5t	31.5	66.3	288	180	42	42	130	75	120	46	400	6 x M30	195	900	7910591
VRBG-FIX-50t	50	204	430	270	70	55	230	100	200	60	650	8 x M36	335	1,000	7909951
VRBG-FIX-100t	100	450	510	380	97	77	250	100	240	79	825	8 x M48	392	2,000	7912696

Subject to technical changes!


VRBG-31.5t / VRBG-FIX-31.5t

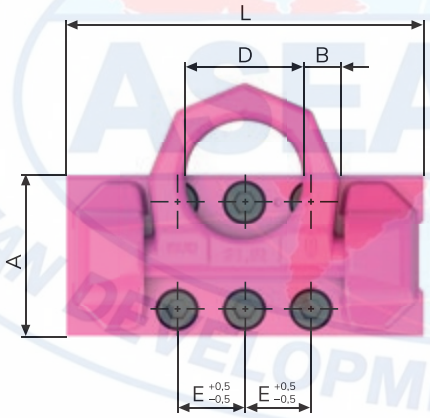

VRBG-31.5t / VRBG-FIX-31.5t

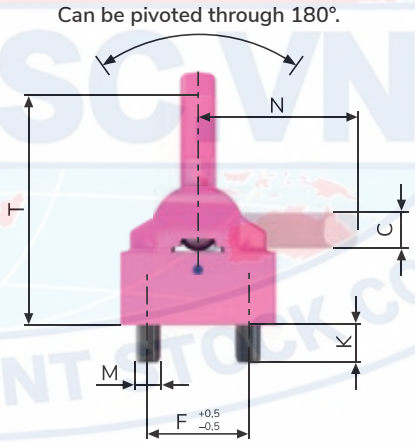

VRBG-FIX-50t / -100t

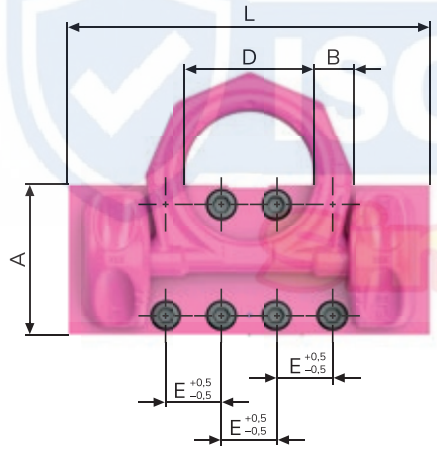

VRBG-FIX-50t / -100t

