VRBK-FIX


VIP-Load ring edge FIX.

4:1 | 270° | -40° 200°C | 400°C max. | DGUV TEST



PRODUCT FEATURES

- Large WLL range 4 t – 50 t.
- Split force introduction thanks to multiple point fixing.
- Suspension ring pivots 270°.
- WLL possible up to 90° in load ring plane.
- Thanks to the weld arrangement (circular fillet weld), no contact/crevice corrosion can occur.
- Innovative wear markings for easy determination of wear.
- The clamping spring reduces noise and keeps the suspension ring in the desired direction.

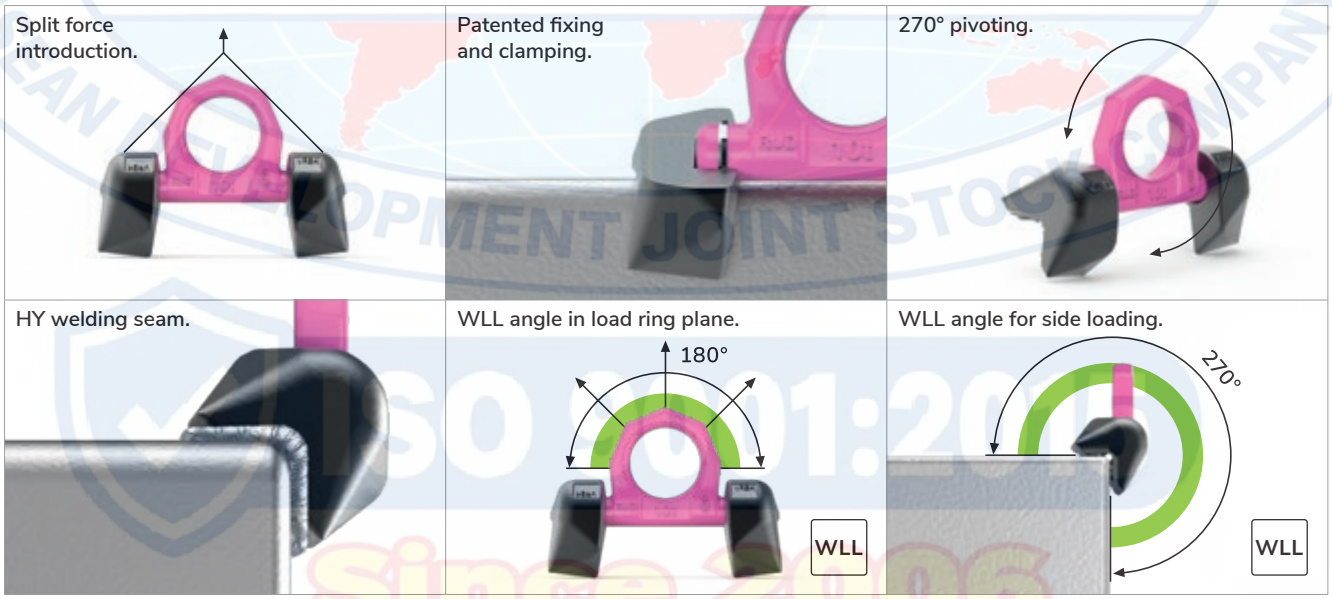

DGUV Test
OA 1951041
Sicherheit geprüft
tested safety
dguv.de/pruefzeichen

✓ Tested and certified by DGUV.

Test criteria: GS-OA-15-04: 2015-12
Certificate no.: OA 1951041

- Can be pivoted through 270°.
- Pre-assembled unit of suspension ring and weld-on blocks.
- No rusting: all-round HY weld.

VRBK-FIX / VRL-FIX / VASKK-FIX

Technical data.

VRBS-FIX – WELDABLE VIP-LOAD RING FOR 90° EDGES.

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	Welding seam	Ref. No.
VRBK-FIX-4t	4	1.05	65	32	14	28	48	141	30	HY 4 + a3	7902149
VRBK-FIX-6.7t	6.7	2.16	84	40	20	35	60	181	34	HY 5 + a3	7902150
VRBK-FIX-10t	10	4.4	94	52	22	46	65	212	46	HY 8 + a3	7902256
VRBK-FIX-16t	16	9.73	126	66	27	57	90	284	64	HY 10	7909845
VRBK-FIX-31.5t	31.5	24.84	177	89	42	78	130	394	70	HY 17	7906225
VRBK-50t	50	76.35	303	134	70	118	230	626	96	HY 25	7904653

Subject to technical changes!

VRL-FIX – OCTAGONAL RING LINK.

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	Ref. No.
VRL-FIX-4t	4	0.4	55	107	14	69	48	17	18	76	7906890
VRL-FIX-6.7t	6.7	0.93	71	134	19	90	60	23	24	99	7906891
VRL-FIX-10t	10	1.44	78	152	19.5	97	65	28	29	105	7906892
VRL-FIX-16t	16	3.2	104	204	27.5	131	90	35	37	146	7906893
VRL-FIX-31.5t	31.5	8.8	152	292	41	193	130	46	47	214	7906894
VRL-FIX-50t	50	27.9	265	510	70	335	230	63	63	371	7907412


Subject to technical changes!

VASKK-FIX – WELD-ON BLOCK.

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	Welding seam	Ref. No.
VASKK-FIX-4t	4	0.33	18	32	–	28	18.5	–	30	HY 4 + a3	7910942
VASKK-FIX-6.7t	6.7	0.57	24	40	–	35	24.5	–	34	HY 5 + a3	7910943
VASKK-FIX-10t	10	1.42	29	52	–	46	30	–	46	HY 8 + a3	7910944
VASKK-FIX-16t	16	3.32	41	66	–	57	37	–	65	HY 10	7909844
VASKK-FIX-31.5t	31.5	7.9	51	89	–	78	48.5	–	70	HY 17	7910279
VASKK-50t	50	23.5	71	134	–	118	67	–	96	HY 25	7903914


Subject to technical changes!

VRBK-FIX




VRBK-FIX

Can be pivoted through 270°




VRL-FIX-octagonal ring link



VRL-FIX-octagonal ring link



VASKK-FIX



VASKK-FIX

