WBPG

Boltable plate hoist ring.

RUD RFID CONNECT IT



PRODUCT FEATURES

- Large WLL range 85 t–250 t.
- Suspension ring, resp. shackle pivots 180°.
- Lifting point swivels 360°.
- Removable suspension ring in shape of a shackle for attaching in conventional lifting means.
- Original RUD bolt with special corrosion protection Corrud-DT for 85 t–250 t.
- Installation possible with clevis, ring and allen key.
- Also available with sling shackle as suspension ring (WBPG-SL).

Up to 250 t WLL. 	360° rotatable, 180° pivotable. 	Removable bracket in shape of a shackle. 
WBPG on a flat surface. 	WBPG on flange. 	WBPG on cone. 

- Heavy-duty design.
- WLL up to 250 t.
- Rotatable through 360°.

WBPG


Metric thread.

WBPG – METRIC THREAD.

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	K [mm]	M	N [mm]	Tightening torque [Nm]	Ref. No.
WBPG-85t-6×M48-Ø400mm	85	170	577	400	75	190	89	304	273	310	73	71	6 × M48	83	6,000	7993712
WBPG-100t-6×M48-Ø400mm	100	198	577	400	83	190	89	304	273	310	73	71	6 × M48	83	6,000	7993245
WBPG-120t-6×M48-Ø570mm	120	360	651	571	95	238	110	344	307	445	77	75	6 × M48	95	6,000	7900917
WBPG-200t-10×M48-Ø650mm	200	671	880	650	120	290	100	460	426	500	73	71	10 × M48	130	6,000	7900383
WBPG-250t-12×M48-Ø730mm	250	992	920	730	130	305	138	496	424	580	74	72	12 × M48	140	6,000	7905690
WBPG-SL-250t-12×M48-Ø730mm	250	844	844	730	126	300	138	452	380	580	74	72	12 × M48	120	6,000	7909644

Subject to technical changes!


WBPG-85 t–200 t

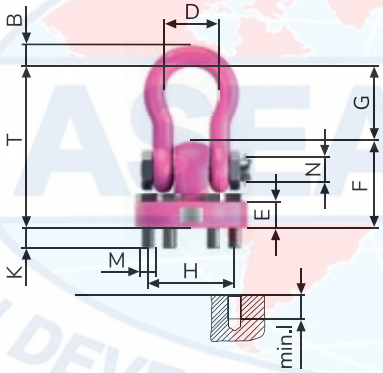

WBPG-85 t–200 t




WBPG-250 t

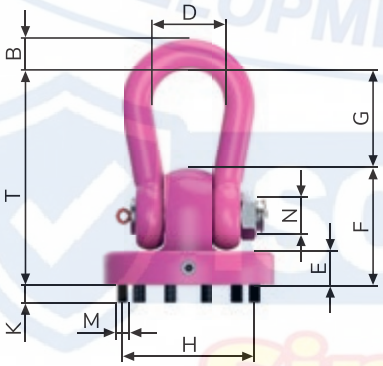

WBPG-250 t



WBPG-SL

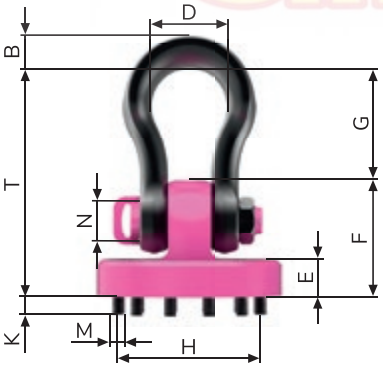

WBPG-SL

