
IVS

ICE-Connection link.

RUD RFID CONNECT IT

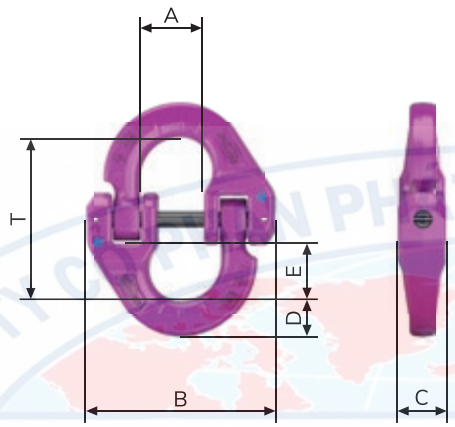

PRODUCT FEATURES

- External connections, e.g. lifting points, shackles, lifting clamps and the chains can be fitted in the lock bracket halves.
- Shape and function registered for patent.
- No kinking of the assembled chain possible.
- The bracket halves can be combined with each other in any way.
- No wandering, no damage to the otherwise usual safety spring or the sleeves of the retaining bolt.
- Innovative wear markings.

Chains	WLL [t]	Designation	A	B	C	D	E	T	Weight [kg/pc.]	Order no.
6	1.8	IVS-6	18	56	13	11	17	46	0.12	7901471
8	3	IVS-8	24	70	17.5	14	23	61	0.29	7901472
10	5	IVS-10	28	88	22	17	27	74	0.6	7901473
13	8	IVS-13	34	111	28	23	33	93	1.2	7901474
16	12.5	IVS-16	39	130	33	27	37	108	2	7901475

Subject to technical changes!


Designation	IVS connection to suit VIP-Shackles
IVS-6	VV-SCH-8 (2.5 t) to VV-SCH-13 (6.7 t)
IVS-8	VV-SCH-10 (4 t) to VV-SCH-16 (10 t)
IVS-10	VV-SCH-13 (6.7 t) to VC-SCH-4.0 (16 t)
IVS-13	VV-SCH-16 (10 t) to VC-SCH-5.0 (25 t)
IVS-16	VC-SCH-4.0 (14 t) to VC-SCH-6.0 (28 t)

Subject to technical changes!

Innovative wear markings.



Connection with shortening hook.



Connection for shackles.

