
IVH

ICE-shortening hook.

RUD RFID CONNECT IT

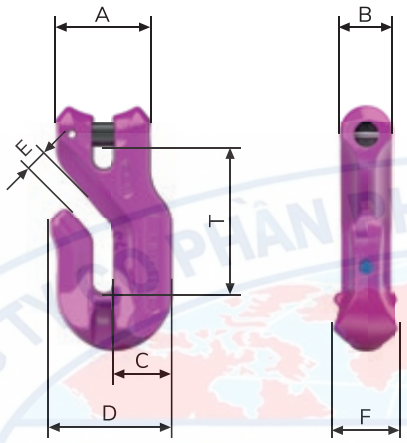

PRODUCT FEATURES

- No reduction of ICE-WLL.
- High dynamic strength.
- Angled insertion opening makes it difficult for the loose chain to slide out.
- Widened hook tip to prevent improper use, e.g. incorrect attachment of the chain.
- Corresponding with norm DIN 5692. Chains groove depth > 5 x nominal thickness of chain.
- Complete with connection bolts and clamp pin pre-assembled.

Chains	WLL [t]	Designation	A	B	C	D	E	F	T	Weight [kg/pc.]	Order no.
6	1.8	IVH-6	34	18	20	44	7.5	22	53	0.27	7900129
8	3	IVH-8	43	24	26	55	9.5	29	67	0.56	7900133
10	5	IVH-10	55	30	34	71	12	38	86	1.2	7900134
13	8	IVH-13	70	38	43	90	15	48	105	2.5	7900136
16	12.5	IVH-16	86	47	53	110	18	66	128	4.8	7900138

Subject to technical changes!


Connection with shortening hook.



Sling chain using IVH.



Incorrect use excluded.



Incorrect use possible.

