


ELECTRIC HOIST
电动葫芦

SCH2 / SCH3


Features:

Electric Hoist is designed for heavy duty applications that require single phase power or three phase power. Up & Down limit device, Extra Heavy Duty G80 Chain, Die-cast aluminium shell, Swivel Hook, The special cooling fin makes the hoist cooling more fast and effectively improves working efficiency.

ALUMINUM

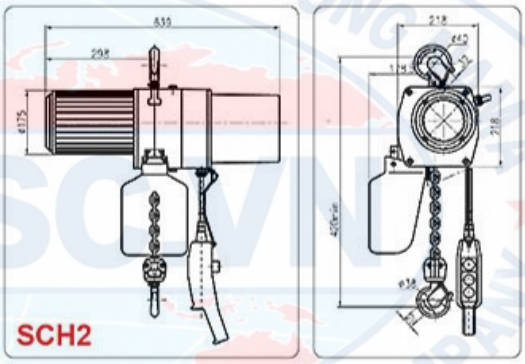



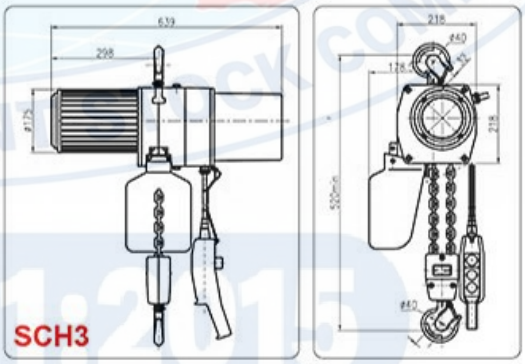

SCH2 单相电动葫芦 ELECTRIC HOIST (SINGLE PHASE)

Model	Work Class	Capacity (Kg)	Lifting Height (m)	Lifting Speed (m/min)	1-PH/110V-220V/50HZ-60HZ			Load Chain		Test Load (KN)	Net Weight (kg)
					Power(kw)	Ins Class	Protection	Dia(mm)	Number of falls		
SCH102G	M6(H4)	250	3	4.9	0.3	F	IP54	7.1*21	1	27.5	43
SCH105G	M6(H4)	500	3	4.9	0.6	F	IP54	7.1*21	1	55	47
SCH110G	M6(H4)	1000	3	4.9	1.2	F	IP54	7.1*21	1	110	50
SCH120G	M6(H4)	2000	3	2.45	1.2	F	IP54	7.1*21	2	220	55

SCH3 三相电动葫芦 ELECTRIC HOIST (THREE PHASE)

Model	Work Class	Capacity (Kg)	Lifting Height (m)	Lifting Speed (m/min)	3-PH/3800-4400/50HZ-60HZ			Load Chain		Test Load (KN)	Net Weight (kg)
					Power(kw)	Ins Class	Protection	Dia(mm)	Number of falls		
SCH302G	M6(H4)	250	3	4.9	0.3	F	IP54	7.1*21	1	27.5	43
SCH305G	M6(H4)	500	3	4.9	0.6	F	IP54	7.1*21	1	55	47
SCH310G	M6(H4)	1000	3	4.9	1.2	F	IP54	7.1*21	1	110	50
SCH320G	M6(H4)	2000	3	2.45	1.2	F	IP54	7.1*21	2	220	55