

ISO 9001:2015

Since 2006

SEAGULL®

常熟海鸥起重机械有限公司

ChangShu Seagull Crane & Hoist Machinery Co., Ltd

公司简介
Corporation Brief Introduction

Changshu Seagull Crane&Hoist Machinery Co.,Ltd was established in 1986. And reformed in 2000 by Japan and china-based partners. Seagull has more than 20 years of experiences in the field of hoist and crane.

Seagull is a manufacturer specialized in designning, developing and producing all kinds of wire rope hoist, electric chain hoist, manual hoist, snatch block, manual winch and riggings haedware.


Our actual land area is 15,000 sq.m. We have advanced CNC machines, roll thread machines, cylindrical surface grinders, spark erosion machines, milling machines, auto destruction test machine, automatic endurance test machines ect.

Seagull adopts a quality management system in accordance to the strict ISO9001:2000. In addition, our electric chain hoist, manual hoist, snatch block are also accredited by German TUV CE, GS. Seagull objective is to produce high quality lifting products at the most competitive price to all of the customers. Seagull is continuing to improve the manufacturing method, and always keep a constant looking for new advanced technique and design, develop new lifting products.

"Quality, development, credibility, sincerity, cooperation and efficiency are the principles of seagull" We sincerely expect the good business relationship with customers from all of the world. Your inquiry, your order, your quality problem will be high attention and immediate response by seagull.

TÜV Rheinland 德国莱茵

TÜV Rheinland 德国莱茵

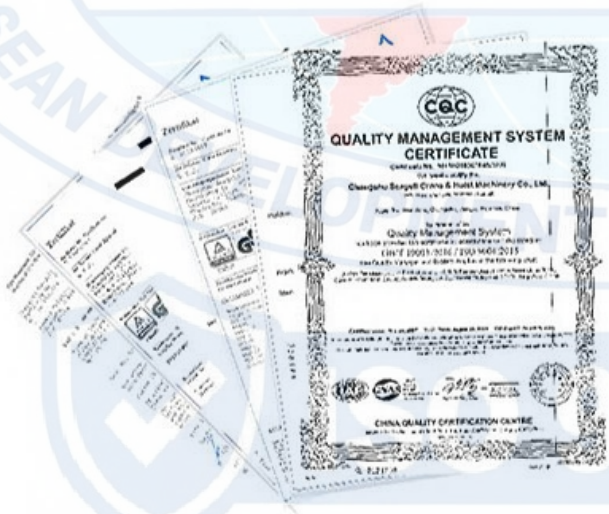



ASEAN JSC.VN
Since 2006



Contents

Electric Hoist 1-14



Chain Block 15-24



Lever Blocks 25-32



Manual Trolley 33-38



Jack & Pallet Truck 39-44



Winch & Lifting Clamp 45-52



Snatch Block 53-58



Chain
Rigging Hardware 59-66
Self-Locking Hook



Other 67-71





Electric Hoist
电动葫芦
HHXG

Features:

A. Capacity from 500kg to 5000kg.
B. Quality chain is supplied by FEC JAPAN.
C. Most tensile safety hooks without break.
D. Compact and high efficient motor with heat protection device.
E. Push button is with 24v low voltage to guarantee safety.
F. Limit switch.
G. Limit load device are fitted.
H. Both single phase and three phase are available.
I. CE certified.
J. IP54 protection on electric hoist for dust and water proof protection.



European Electrics

Grease Filled reduction Gearbox



Limit Switches

Heavy Duty Motor



DC Brake

Robust All Steel Construction of Outer Housing



Overload Clutch



Moulded External Strainer Wire Built into Pendant Cord

FEC JAPAN Load Chain



Electro Plated Limit Spring

Thrust Race

Roller Bearings


Heavy Duty Cast Safely Latch

IP54 European 24V Pendant Control




Contactor Isolation Emergency Stop

CE

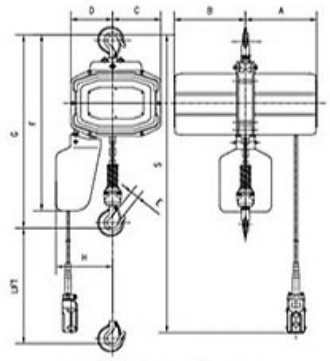


ELECTRIC CHAIN HOIST
500 kg 1000 kg

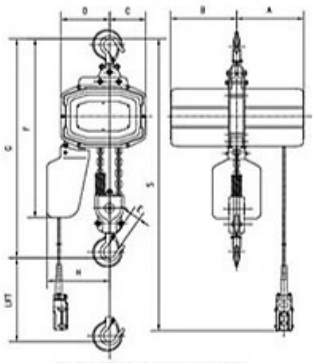


ELECTRIC CHAIN HOIST
2000 kg

Perfect for factories, logistics, transportation, enterprises, agriculture. High speed and high efficiency give you better working experience.



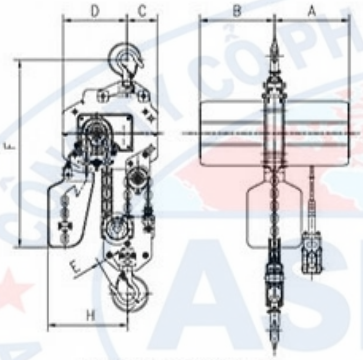

ELECTRIC CHAIN HOIST
3000 kg

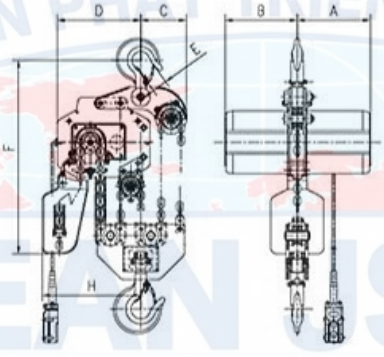

ELECTRIC CHAIN HOIST
5000 kg

HHXG2 单相环链电动葫芦 SUSPENDED TYPE SINGLE PHASE ELECTRIC CHAIN HOIST

Model	Rated Load (Ton)	Lift (m)	Lifting Speed (m/min)	Hoist Motor 1-phase			Load Chain		Dynamical Test (KN)	Min. Headroom MaxG(mm)	Net Weight (kg)	Major Dimensions(approx) (mm)						
				Output(kw)	Ins Class	% ED	Dia(mm)	Number of falls				A	B	C	D	E	F	H
HHXG205	0.5	3	5.2	0.8	F	40	7.1	1	5.5	545	64	249	249	168	146	25	640	197
HHXG210	1	3	5.2	1.2	F	40	7.1	1	11	580	65	249	249	168	146	32	640	197
HHXG220	2	3	2.6	1.2	F	40	7.1	2	22	740	72	249	249	134	180	38	675	231
HHXG230	3	3	1.7	1.2	F	40	7.1	3	33	790	80	249	249	100	214	41	658	265

HHXG3 三相环链电动葫芦 SUSPENDED TYPE THREE PHASE ELECTRIC CHAIN HOIST

Model	Rated Load (Ton)	Lift (m)	Lifting Speed (m/min)	Hoist Motor 3-phase			Load Chain		Dynamical Test (KN)	Min. Headroom MaxG(mm)	Net Weight (kg)	Major Dimensions(approx) (mm)						
				Output(kw)	Ins Class	% ED	Dia(mm)	Number of falls				A	B	C	D	E	F	H
HHXG305	0.5	3	6.3	0.8	F	40	7.1	1	5.5	545	64	249	249	168	146	25	640	197
HHXG310	1	3	6.3	1.6	F	40	7.1	1	11	580	65	249	249	168	146	32	640	197
HHXG320	2	3	3.2	1.6	F	40	7.1	2	22	740	72	249	249	134	180	38	675	231
HHXG330	3	3	2.1	1.6	F	40	7.1	3	33	790	80	249	249	100	214	41	658	265
HHXG350	5	3	1.3	1.6	F	40	7.1	5	55	950	135	249	249	190	309	48	703	360

HHXG3 三相双速环链电动葫芦 DOUBLE SPEED SUSPENDED TYPE THREE PHASE ELECTRIC CHAIN HOIST

Model	Rated Load (Ton)	Lift (m)	Lifting Speed (m/min)	Hoist Motor 3-phase			Load Chain		Dynamical Test (KN)	Min. Headroom MaxG(mm)	Net Weight (kg)	Major Dimensions(approx) (mm)						
				Output(kw)	Ins Class	% ED	Dia(mm)	Number of falls				A	B	C	D	E	F	H
HHXG305B	0.5	3	5.2/1.7	0.8/0.25	F	40	7.1	1	5.5	545	64	249	249	168	146	25	640	197
HHXG310B	1	3	5.2/1.7	1.2/0.4	F	40	7.1	1	11	580	65	249	249	168	146	32	640	197
HHXG320B	2	3	2.6/0.85	1.2/0.4	F	40	7.1	2	22	740	72	249	249	134	180	38	675	231
HHXG330B	3	3	1.7/0.58	1.2/0.4	F	40	7.1	3	33	790	80	249	249	100	214	41	658	265
HHXG350B	5	3	1.0/0.35	1.2/0.4	F	40	7.1	5	55	950	135	249	249	190	309	48	703	360

ELECTRIC HOIST WITH TROLLEY
电动葫芦+电动小车

SGW





ELECTRIC CHAIN HOIST



ELECTRIC CHAIN HOIST WITH TROLLEY



SGW 电动葫芦 ELECTRIC HOIST 单速 SINGLE SPEED

0.5 Ton - 10 Ton

Model	Rated Load (Kg)	Standard Lifting Height (m)	Lifting Speed (m/min)	Lifting Motor					Chain Falls	Chain Specification	Test Load (t)	Weight (kg)	Weight Added with 1m Higher (kg)
				Power (kw)	Rotation Speed (r/min)	Phases	Voltage (v)	Frequency (Hz)					
SGW-00501SF	0.5	3	6.8	0.75	1440	3	200-440	50	1	Φ6.3	0.625	47	0.81
SGW-01001SF	1	3	6.6	1.5	1440	3	200-440	50	1	Φ7.1	1.25	61	1.1
SGW-01002SF	1	3	3.4	0.75	1440	3	200-440	50	2	Φ6.3	1.25	52	1.62
SGW-01501SF	1.5	3	8.8	3.0	1440	3	200-440	50	1	Φ10.0	1.875	108	2.3
SGW-02001SF	2	3	6.6	3.0	1440	3	200-440	50	1	Φ10.0	2.5	115	2.3
SGW-02002SF	2	3	3.3	1.5	1440	3	200-440	50	2	Φ7.1	2.5	73	2.2
SGW-02501SF	2.5	3	5.4	3.0	1440	3	200-440	50	1	Φ11.2	3.125	116	2.8
SGW-03001SF	3	3	5.4	3.0	1440	3	200-440	50	1	Φ11.2	3.75	122	2.8
SGW-03002SF	3	3	4.4	3.0	1440	3	200-440	50	2	Φ10.0	3.75	131	4.7
SGW-05002SF	5	3	2.7	3.0	1440	3	200-440	50	2	Φ11.2	6.25	151	5.6
SGW-10004SF	10	3	2.7	3.0	1440	3	200-440	50	4	Φ11.2	12.5	300	8.4

SGW 电动葫芦带电动小车 ELECTRIC HOIST WITH TROLLEY 单速 SINGLE SPEED

0.5 Ton - 10 Ton

Model	Rated Load (Kg)	Standard Lifting Height (m)	Lifting Speed (m/min)	Lifting Motor					Operation Motor						Chain Falls	Chain Specification	Test Load (t)	I-Beam (mm)	Weight (kg)	Weight Added with 1m Higher (kg)
				Power (kw)	Rotation Speed (r/min)	Phases	Voltage (v)	Frequency (Hz)	Power (kw)	Rotation Speed (r/min)	Operation Speed (m/min)	Phases	Voltage (v)	Frequency (Hz)						
SGW-00501SE	0.5	3	6.8	0.75	1440	3	200-440	50	0.4	1440	11/21	3	200-440	50	1	Φ6.3	0.625	58-153	89	0.81
SGW-01001SE	1	3	6.6	1.5	1440	3	200-440	50	0.4	1440	11/21	3	200-440	50	1	Φ7.1	1.25	58-153	103	1.1
SGW-01002SE	1	3	3.4	0.75	1440	3	200-440	50	0.4	1440	11/21	3	200-440	50	2	Φ6.3	1.25	58-153	101	1.62
SGW-01501SE	1.5	3	8.8	3.0	1440	3	200-440	50	0.4	1440	11/21	3	200-440	50	1	Φ10.0	1.875	82-178	157	2.3
SGW-02001SE	2	3	6.6	3.0	1440	3	200-440	50	0.4	1440	11/21	3	200-440	50	1	Φ10.0	2.5	82-178	164	2.3
SGW-02002SE	2	3	3.3	1.5	1440	3	200-440	50	0.4	1440	11/21	3	200-440	50	2	Φ7.1	2.5	82-178	122	2.2
SGW-02501SE	2.5	3	5.4	3.0	1440	3	200-440	50	0.75	1440	11/21	3	200-440	50	1	Φ11.2	3.125	100-178	177	2.8
SGW-03001SE	3	3	5.4	3.0	1440	3	200-440	50	0.75	1440	11/21	3	200-440	50	1	Φ11.2	3.75	100-178	183	2.8
SGW-03002SE	3	3	4.4	3.0	1440	3	200-440	50	0.75	1440	11/21	3	200-440	50	2	Φ10.0	3.75	100-178	192	4.7
SGW-03003SE	3	3	2.2	1.5	1440	3	200-440	50	0.75	1440	11/21	3	200-440	50	3	Φ7.1	3.75	100-178	146	3.5
SGW-05002SE	5	3	2.7	3.0	1440	3	200-440	50	0.75	1440	11/21	3	200-440	50	2	Φ11.2	6.25	100-178	234	5.6
SGW-10004SE	10	3	2.7	3.0	1440	3	200-440	50	0.75	1440	11/21	3	200-440	50	3	Φ11.2	12.5	150-220	440	11


SGW 电动葫芦 ELECTRIC HOIST 单速 SINGLE SPEED 0.5 Ton - 10 Ton


Model	H	A	B	D	E	I	J	K	L	M	N
SGW-00501SF	550	460	230	280	160	Φ35	25	Φ35	25	17	17
SGW-01001SF	650	520	260	300	176	Φ40	31	Φ40	31	22	22
SGW-01002SF	670	460	230	280	205	Φ40	31	Φ40	31	22	22
SGW-01501SF	800	615	295	430	265	Φ47	40	Φ47	38	30	30
SGW-02001SF	800	615	295	430	265	Φ47	40	Φ47	38	30	30
SGW-02002SF	835	520	260	300	236	Φ47	38	Φ47	38	30	30
SGW-02501SF	845	615	295	430	265	Φ58	47	Φ58	47	36	36
SGW-03001SF	845	615	295	430	265	Φ58	47	Φ58	47	36	36
SGW-03002SF	950	615	295	430	320	Φ58	47	Φ58	47	36	36
SGW-05002SF	1030	615	295	430	325	Φ60	48	Φ60	48	43	43
SGW-10004SF	1400	630	315	/	890	Φ85	80	Φ80	80	104	55

SGW 电动葫芦带电动小车 ELECTRIC HOIST WITH TROLLEY 单速 SINGLE SPEED 0.5 Ton - 10 Ton


Model	H	A	B	D	E	I	K	L	N	W	U	R	T
SGW-00501SE	630	460	230	280	160	Φ35	Φ35	25	17	206	111	142	231
SGW-01001SE	650	520	260	300	176	Φ40	Φ40	32	24	206	111	142	231
SGW-01002SE	695	460	230	280	205	Φ41	Φ40	31	24	206	111	142	231
SGW-01501SE	770	615	295	430	265	Φ47	Φ47	40	30	237	127	142	231
SGW-02001SE	770	615	295	430	265	Φ47	Φ47	40	30	237	127	142	231
SGW-02002SE	815	520	260	300	236	Φ36	Φ47	38	30	237	127	142	231
SGW-02501SE	830	615	295	430	265	Φ58	Φ58	48	36	265	140	142	231
SGW-03001SE	830	615	295	430	265	Φ58	Φ58	48	36	265	140	142	231
SGW-03002SE	930	615	295	430	320	Φ43	Φ58	47	36	265	140	142	231
SGW-03003SE	940	520	260	350	205	Φ43	Φ58	47	36	265	140	142	231
SGW-05002SE	1015	615	295	430	325	Φ54	Φ60	48	43	296	156	142	231


Model	H	A	B	E	I	J	K	L	M	N	W	U	R	T
SGW-10004SE	1190	630	315	890	Φ70	Φ36	Φ85	80	85	55	366	191	142	231

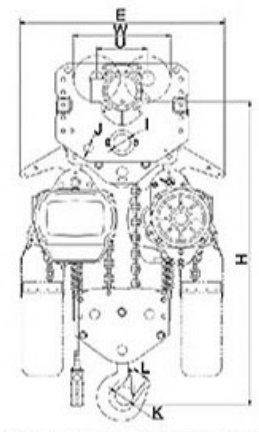

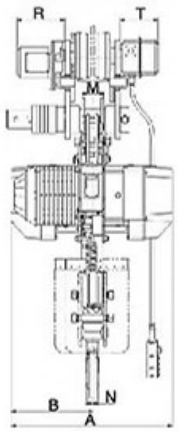



10 Ton Electric Hoist with Trolley





0.5 Ton - 5 Ton Electric Hoist With Trolley





0.5 Ton - 10 Ton Electric Hoist

ELECTRIC HOIST WITH TROLLEY
电动葫芦+电动小车

SGW+P



The hoist body is parallel to electric trolley, greatly increase hoist usage space, ensure trolley operate left and right extremely.



Dual speeds hoist adopt built-in inverter
Adopt built-in inverter to make hoist in Dual speeds will reduces swing in operation, helps hoist start steadily and stop slowly. The speed ratio can be adjusted, the standard speed ratio is 4:1, if special reauirement, please inform when inquiry.




Limit switch without guide frame
No guide frame ensures hoist lift and drag the weight diagonally.



Cooling fan
Cooling fan prevent motor over heat when long time continuous usage. Hollowed-out fan cover and cooling fin not only enhance fan heat dissipation capacity, but make fan operated more quietly.









Side magnetic braking device:
The magnetic force generator is the latest design which is featured for generating magnetic force. It allows instant brake as soon as the electric power is cut off. Thus the braking safety while loading is guaranteed.



Clutch
As emergency overload protection, clutch will functions and motor will slip when abnormal load.

The shell except for connecting case, all other parts hoist body adopt aluminum, light weight, but exceptional rigidity, as well as high dust-protection adn water protection.



Chain:
Japan FEC80 chain heat-treatable steel alloy chain. Lifting height is against your requirement.

Hook:
It is hot forging with perfect strength that is hard to break. The operation safety of the lower hook is ensured by its 360 degrees rotation and safety tongue piece.

Hand Switch




An ergonomic shape design ensures hand switch operated friendly. The button with a light soft operating sensation satisfied the operator not fatigued after a long period operation.



Back lug easily for firm grip



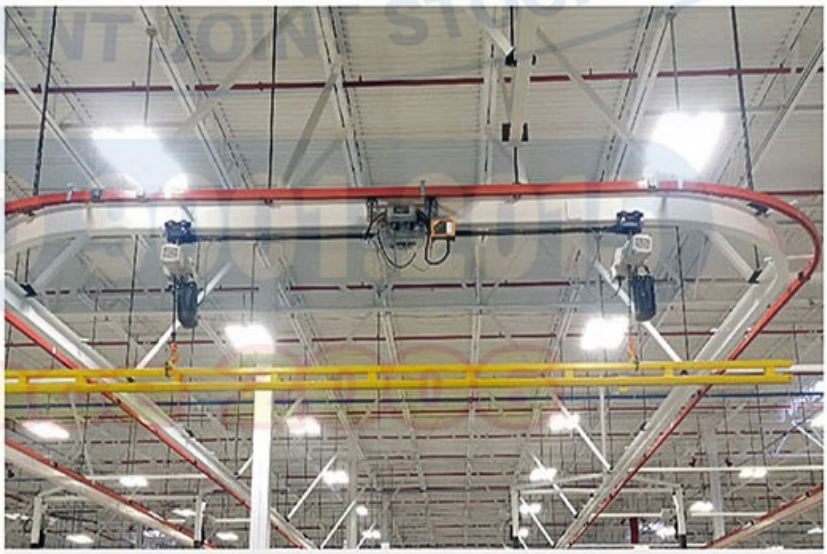

A. Capacity from 500kg to 10000kg
B. Single speed, Dual, Variable speed are available
C. 60min, H4 rated motor for the demanding applications
D. Completely sealed body suitable for indoor & outdoor invironments Hoist body-IP55, Hand switch-IP65
E. CE Certified

SGW+PLUS 电动葫芦 ELECTRIC HOIST 单速/双速/变速 SINGLE/DUAL/VARIABLE SPEEDS

0.5 Ton - 10 Ton

Model	Rated load (Ton)	Standard Lifting Height (m)	Lifting Speed (m/min) 50Hz	Lifting Motor					Chain Specification(mm)	Test Load (t)	Weight (kg)	Weight Added with 1m Higher (kg)
				Power (kw)	Rotation Speed (r/min)	Phases	Voltage (v)	Frequency (Hz)				
SGW+P-00501SF	0.5	3	6.8&1.7	0.75	1440&360	3	200-600	50/60	6.3*19.1	0.625	47	0.8
SGW+P-01001SF	1	3	6.6&1.65	1.5	1440&360	3	200-600	50/60	7.1*21	1.25	64	1.1
SGW+P-01002SF	1	3	3.4&0.85	0.75	1440&360	3	200-600	50/60	6.3*19.1	1.25	55	1.6
SGW+P-01501SF	1.5	3	8.8&2.2	3	1440&360	3	200-600	50/60	10*30	1.875	120	2.3
SGW+P-02001SF	2	3	6.6&1.65	3	1440&360	3	200-600	50/60	10*30	2.5	120	2.3
SGW+P-02002SF	2	3	3.3&0.82	1.5	1440&360	3	200-600	50/60	7.1*21	2.5	80	3.2
SGW+P-02501SF	2.5	3	5.4&1.35	3	1440&360	3	200-600	50/60	11.2*34	3.125	127	2.6
SGW+P-03001SF	3	3	5.4&1.35	3	1440&360	3	200-600	50/60	11.2*34	3.75	127	2.6
SGW+P-03002SF	3	3	4.4&1.1	3	1440&360	3	200-600	50/60	10*30	3.75	134	4.6
SGW+P-05002SF	5	3	2.7&0.67	3	1440&360	3	200-600	50/60	11.2*34	6.25	155	5.2
SGW+P-10004SF	10	3	2.7&0.67	3*2	1440&360	3	200-600	50/60	11.2*34	12.5	355	10.8


SGW+PLUS 电动葫芦带电动小车 ELECTRIC HOIST WITH TROLLEY 单速/双速/变速 SINGLE/DUAL/VARIABLE SPEEDS

0.5 Ton - 10 Ton

Model	Rated load (Ton)	Standard Lifting Height (m)	Lifting Speed (m/min) 50Hz	Lifting Motor					Trolley motor				Test Load (t)	Weight (kg)	Weight Added with 1m Higher (kg)
				Power (kw)	Rotation Speed (r/min)	Phases	Voltage (v)	Frequency (Hz)	Power (kw)	Rotation Speed (r/min)	Trolley Speed(m/min)	I-Beam			
SGW+P-00501SE	0.5	3	6.8&1.7	0.75	1440&360	3	200-600	50/60	0.4&0.1	2880&720	5&20	58-153	0.625	87	0.8
SGW+P-01001SE	1	3	6.6&1.65	1.5	1440&360	3	200-600	50/60	0.4&0.1	2880&720	5&20	58-153	1.25	104	1.1
SGW+P-01002SE	1	3	3.4&0.85	0.75	1440&360	3	200-600	50/60	0.4&0.1	2880&720	5&20	58-153	1.25	95	1.6
SGW+P-01501SE	1.5	3	8.8&2.2	3	1440&360	3	200-600	50/60	0.4&0.1	2880&720	5&20	58-153	1.875	168	2.3
SGW+P-02001SE	2	3	6.6&1.65	3	1440&360	3	200-600	50/60	0.4&0.1	2880&720	5&20	82-178	2.5	168	2.3
SGW+P-02002SE	2	3	3.3&0.82	1.5	1440&360	3	200-600	50/60	0.4&0.1	2880&720	5&20	82-178	2.5	128	3.2
SGW+P-02501SE	2.5	3	5.4&1.35	3	1440&360	3	200-600	50/60	0.75&0.18	2880&720	5&20	82-178	3.125	188	2.6
SGW+P-03001SE	3	3	5.4&1.35	3	1440&360	3	200-600	50/60	0.75&0.18	2880&720	5&20	100-178	3.75	188	2.6
SGW+P-03002SE	3	3	4.4&1.1	3	1440&360	3	200-600	50/60	0.75&0.18	2880&720	5&20	100-178	3.75	195	4.6
SGW+P-05002SE	5	3	2.7&0.67	3	1440&360	3	200-600	50/60	0.75&0.18	2880&720	5&20	100-178	6.25	240	5.2
SGW+P-10004SE	10	3	2.7&0.67	3*2	1440&360	3	200-600	50/60	0.75&0.18	2880&720	5&20	150-220	12.5	495	10.8

SGW+PLUS 电动葫芦 ELECTRIC HOIST 尺寸规格 SIZE SPECIFICATION

Model	Rated load (Ton)	H	A	B	D	E	I	J	K	L	M	N	Dia*Chain fall
		(mm)											
SGW+P-00501SF	0.5	455	566	266	285	165	35	27	34	25	17	17	6.3*1
SGW+P-01001SF	1	520	627	302	300	176	42	32	41	32	24	24	7.1*1
SGW+P-01002SF	1	490	566	266	285	165	35	27	35	25	24	24	6.3*2
SGW+P-01501SF	1.5	640	733	343	430	265	48	38	49	40	28	28	10*1
SGW+P-02001SF	2	640	733	343	430	265	48	38	49	40	28	28	10*1
SGW+P-02002SF	2	705	627	302	300	236	48	38	49	40	28	28	7.1*2
SGW+P-02501SF	2.5	685	733	343	430	265	59	48	59	48	34	34	11.2*1
SGW+P-03001SF	3	685	733	343	430	265	59	48	59	48	34	34	11.2*1
SGW+P-03002SF	3	790	733	343	430	320	59	48	59	48	34	34	10*2
SGW+P-05002SF	5	870	733	343	430	325	59	48	60	48	42	42	11.2*2
SGW+P-10004SF	10	1270	780	390	***	890	85	70	85	70	104	60	11.2*4

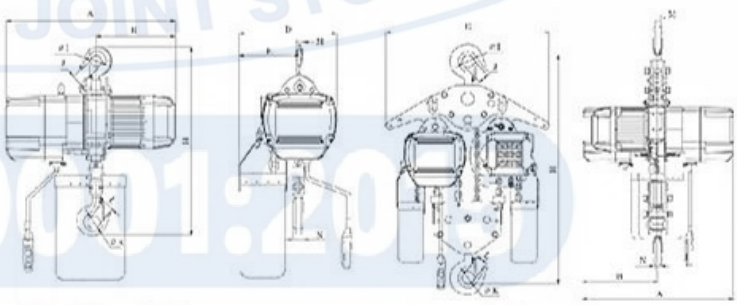


0.5T - 5T Electric Hoist

10T Electric Hoist

SGW+PLUS 电动葫芦带电动小车 ELECTRIC HOIST WITH TROLLEY 尺寸规格 SIZE SPECIFICATION

Model	Rated load (Ton)	H	A	B	D	E	I	K	L	N	W	U	R	T	Dia*Chain fall
		(mm)													
SGW+P-00501SE	0.5	525	566	266	285	165	31	34	25	17	206	111	142	276	6.3*1
SGW+P-01001SE	1	535	627	302	300	176	31	41	32	24	206	111	142	276	7.1*1
SGW+P-01002SE	1	565	566	266	285	165	31	35	25	24	206	111	142	276	6.3*2
SGW+P-01501SE	1.5	610	733	343	430	265	36	49	40	28	237	127	142	276	10*1
SGW+P-02001SE	2	610	733	343	430	265	36	49	40	28	237	127	142	276	10*1
SGW+P-02002SE	2	685	627	302	300	236	36	49	40	28	237	127	142	276	7.1*2
SGW+P-02501SE	2.5	670	733	343	430	265	43	59	48	34	265	140	142	315	11.2*1
SGW+P-03001SE	3	670	733	343	430	265	43	59	48	34	265	140	142	315	11.2*1
SGW+P-03002SE	3	770	733	343	430	320	43	59	48	34	265	140	142	315	10*2
SGW+P-05002SE	5	855	733	343	430	325	54	60	48	42	296	156	142	315	11.2*2
SGW+P-10004SE	10	1060	780	390	**	890	70	85	70	60	366	191	231	142	11.2*4

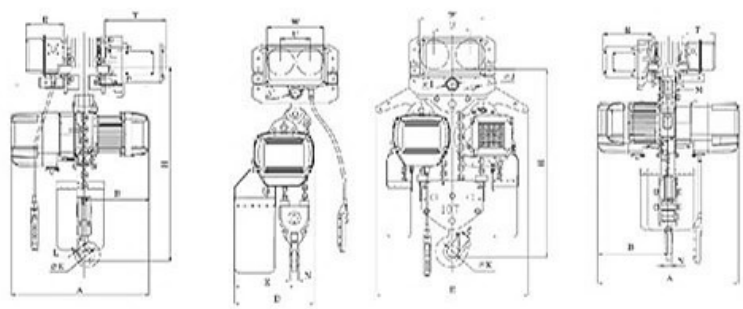

0.5T - 5T Electric Hoist with Trolley

10T Electric Hoist with Trolley



ELECTRIC HOIST
电动葫芦

SG


FEATURE:

A. Aluminium Body
B. Quality chain is supplied by FEC Japan.
C. Most tensile safety hooks without break
D. Compact and high efficient motor with heat protection device
E. Choose double speed motor,big power and different voltage are available
F. Push button is with 24V low voltage to guarantee safety and limit switch system
G. Sensitive break system .Friction disk without asbestos
H. Choose presice process of high tensile helix gear working system to keep lower noise
I. Enough Chain bucket set. space to suit different lifting longth
J. IP54 protection on electric hoist for dust and water protection
K. Ins class: F





CÔNG TY CỔ PHẦN PHÁT TRIỂN ASEAN JSC.VN ASEAN DEVELOPMENT JOINT STOCK COMPANY ISO 9001:2015 Since 2015

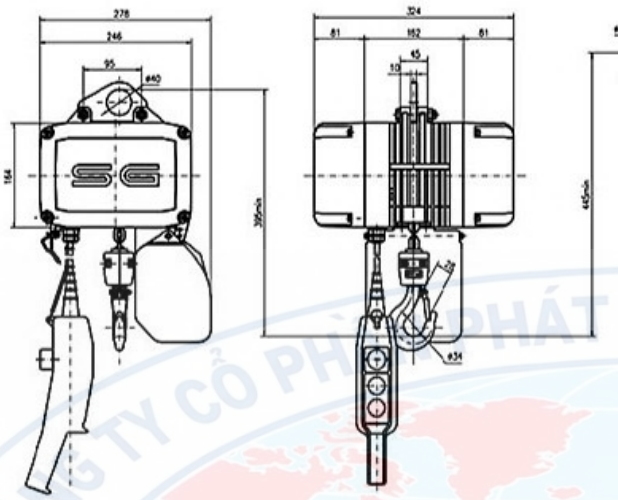





European Electrics



Heavy Duty
Cast Sately Latch Hook



Contactor Isolation
Emergency Stop

SG 电动葫芦 ELECTRIC HOIST (THREE PHASE)

Work class	M3				
	150				
% ED	25%				
Model	Capacity	lifting speed (m/min)	Lifting height (m)	Power (Kw)	Weight (kg)
SG500/1N	500	8	3	0.8	25
SG500/1NF	500	8/2	3	0.8/0.2	25
SG500/1S	320	12.5	3	0.8	25
SG500/1SF	320	12.5/3	3	0.8/0.2	25
SG500/1H	200	20	3	0.8	25
SG500/1HF	200	20/5	3	0.8/0.2	25
SG1000/2N	1000	4	3	0.8	27
SG1000/2NF	1000	4/1	3	0.8/0.2	27
SG1000/2S	630	6.3	3	0.8	27
SG1000/2SF	630	6.3/1.5	3	0.8/0.2	27
SG1000/2H	400	10	3	0.8	27
SG1000/2HF	400	10/2.5	3	0.8/0.2	27

SG 电动葫芦 ELECTRIC HOIST (SINGLE PHASE)

Work class	M3				
	150				
% ED	25%				
Model	Capacity	lifting speed (m/min)	Lifting height (m)	Power (Kw)	Weight (kg)
SG500/1ND	500	4	3	0.45	25
SG500/1SD	320	6	3	0.45	25
SG500/1HD	200	10	3	0.45	25
SG1000/2ND	1000	2	3	0.45	27
SG1000/2SD	630	3	3	0.45	27
SG1000/2HD	400	5	3	0.45	27




ELECTRIC HOIST
电动葫芦

SCH2 / SCH3


Features:

Electric Hoist is designed for heavy duty applications that require single phase power or three phase power. Up & Down limit device, Extra Heavy Duty G80 Chain, Die-cast aluminium shell, Swivel Hook, The special cooling fin makes the hoist cooling more fast and effectively improves working efficiency.

ALUMINUM

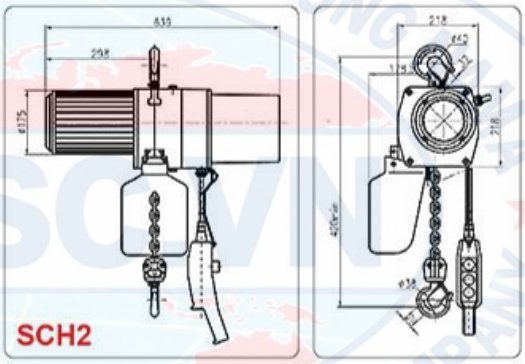



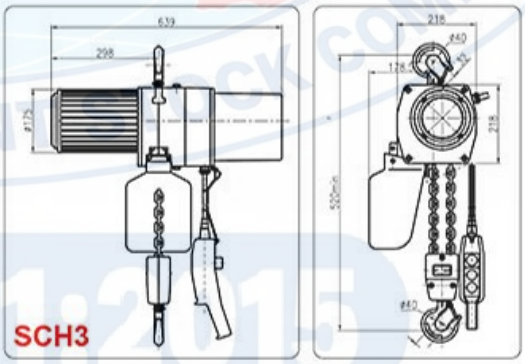

SCH2 单相电动葫芦 ELECTRIC HOIST (SINGLE PHASE)

Model	Work Class	Capacity (Kg)	Lifting Height (m)	Lifting Speed (m/min)	1-PH/110V-220V/50HZ-60HZ			Load Chain		Test Load (KN)	Net Weight (kg)
					Power(kw)	Ins Class	Protection	Dia(mm)	Number of falls		
SCH102G	M6(H4)	250	3	4.9	0.3	F	IP54	7.1*21	1	27.5	43
SCH105G	M6(H4)	500	3	4.9	0.6	F	IP54	7.1*21	1	55	47
SCH110G	M6(H4)	1000	3	4.9	1.2	F	IP54	7.1*21	1	110	50
SCH120G	M6(H4)	2000	3	2.45	1.2	F	IP54	7.1*21	2	220	55


SCH3 三相电动葫芦 ELECTRIC HOIST (THREE PHASE)

Model	Work Class	Capacity (Kg)	Lifting Height (m)	Lifting Speed (m/min)	3-PH/3800-4400/50HZ-60HZ			Load Chain		Test Load (KN)	Net Weight (kg)
					Power(kw)	Ins Class	Protection	Dia(mm)	Number of falls		
SCH302G	M6(H4)	250	3	4.9	0.3	F	IP54	7.1*21	1	27.5	43
SCH305G	M6(H4)	500	3	4.9	0.6	F	IP54	7.1*21	1	55	47
SCH310G	M6(H4)	1000	3	4.9	1.2	F	IP54	7.1*21	1	110	50
SCH320G	M6(H4)	2000	3	2.45	1.2	F	IP54	7.1*21	2	220	55


ELECTRIC TROLLEY
电动小车

HHBD2 / HHBD3



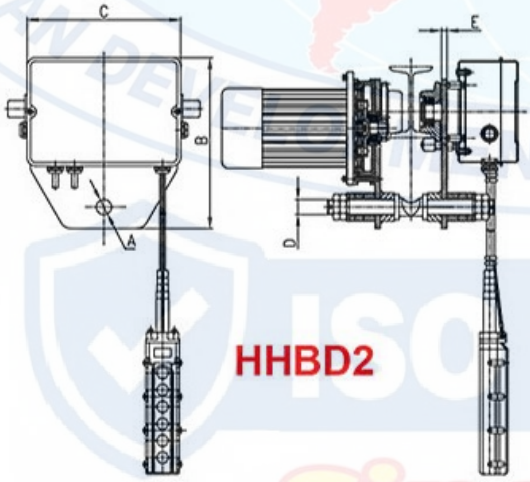

HHBD2

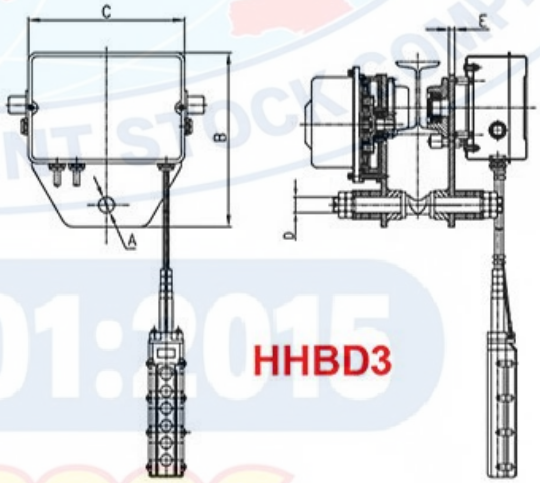

HHBD3

HHBD2 单相电动小车 SINGLE PHASE ELECTRIC TROLLEY

Model		HHBD210	HHBD220
Rated Capacity(kg)		1000	2000
Beam Width(mm)		75-180	75-180
Dimensions(mm)	A	27.5	36.5
	B	265	265
	C	260	260
	D	27	36
	E	10	10
Runing Speed(m/min)		20	20
Ins Class		F	F
% ED		40	40
Hoist Motor Output(kw)		0.3	0.3
Net Weight(kg)		43	45

HHBD3 三相电动小车 THREE PHASE ELECTRIC TROLLEY

HHBD310	HHBD320	HHBD330	HHBD350
1000	2000	3000	5000
75-180	75-180	100-180	100-180
27.5	36.5	42.5	30.5x2
265	265	265	268
260	260	260	390
27	36	42	30x2
10	10	12	16
20	20	15	15
F	F	F	F
40	40	40	40
0.3	0.3	0.3	0.4
43	45	47	92



Electric Wire Rope Hoist
钢丝绳电动葫芦

SK

USAGE:
The mini hoist can be widely used in hanging for engineering, plant hoist operations, civil hydropower installed piping, Warehousing and shipping the goods; it can be used to lift, raise and drag. It's compact, lightweight, ceonomy and effective, and easy to obtain single-phase power supply.

SPECIAL FEATURES:

Motor System:
Using brushless motor series excited of high efficiency industrial grade; there are two selected configurations of single-phase voltage (110V / 220V); its enameled heat levels up to 200 degrees, specifically designed for long crane.

Brake system:
Dual brake system with one mechanical ratchet gear brakes and the other brake resistor short circuit controller; formula oiled copper disc brakes with high friction coefficient, which needs no adjustment; immediately brake in power outage or malfunction, great safety and long life.

Security systems:
Cable stops automatically over the volume limit; cable stops automatically when inversing.


Electronic control system:
Direct control which saves tedious lines and has the advantages of easy maintenance, low failure rate, security and stability; control switch with separate power line and quick connector makes it easy to carry.

Cable Specifications:
Japan imported steel wire from large manufacturing firms with 3-fold safety factor.

Gear system:
Use drive bevel reducing gear of high efficiency; heat treated alloy steel gear with its intensity three times higher than the rated hoist.

PART OF THE MAIN BODY CASE:
Die-casted in one piece, motor body and gearbox have the advantages of strong toughness, computer CNC machining, high precision, low noise, and smooth operation; using automotive -grade powder coating, it has nice appearance; it's compacted and light-weighted.







SK 钢丝绳电动葫芦
Electric Wire Rope Hoist

Model		SK-80	SK-160	SK-190	SK-230	SK-300
Rated capacity (Kg)		80	160	190	230	300
Speed (m/min)	Outermost Layer	32	23	18	14	14
Brushless Motor	Power(W)	600	1200	1250	1300	1500
	Current(A)	8	12	12	12.5	13
Brake	Motor	Resistive				
	Machinery	Dual Ratchet				
Lifting Height(m)		29	29	29	29	29
Cable Wire(Φmm x m)		4 x 30	5 x 30	5 x 30	5 x 30	5 x 30
Standard Accessories	Power Wire	$2mm^2$ x 3Core x 4.5m				
	Switching Wire	$2mm^2$ x 5Core x 7m				
	Load Hook	K-10				
N.W. (kg)		8	17	17	18	18
G.W. (kg)		16	24	24	25	26



Electric Wire Rope Hoist
钢丝绳电动葫芦

ZS100 / ZS200

FEATURE:

The electric wire rope hoist main use in factories, mines, agricalture, construction building site, dock, warehouse ect for installation of the machines, lifting the cargoes. Loading & unloading the object. The hoist is in complicance with the national standard compact design, light weight is more welcome for DIY area use.




Contactor Isolation
Emergency Stop




Protable handle



Heavy Duty Cast
Sately Latch

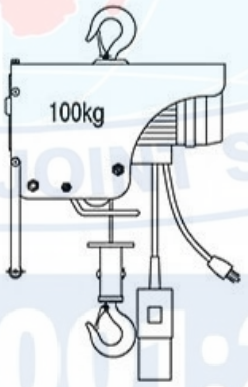

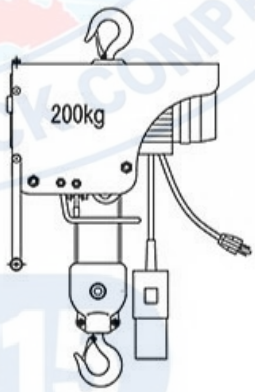





ZS100/ZS200 钢索电动葫芦 ELECTRIC WIRE ROPE HOIST

Model	Capacity (Kg)	Lift Height (m)	Winding Speed (at rated load)	Moto Output	Continnuous Operation	Power Cord Length	Operation Switch cord Length	Weight (kg)
ZS100	100	10	12m/min	250W	5minutes	1.5m	3m	14.5kg
ZS200	200	5	6m/min	250W	5minutes	3m	5m	16kg


ELECTRIC WIRE ROPE HOIST
钢丝绳电动葫芦

CD(MD)

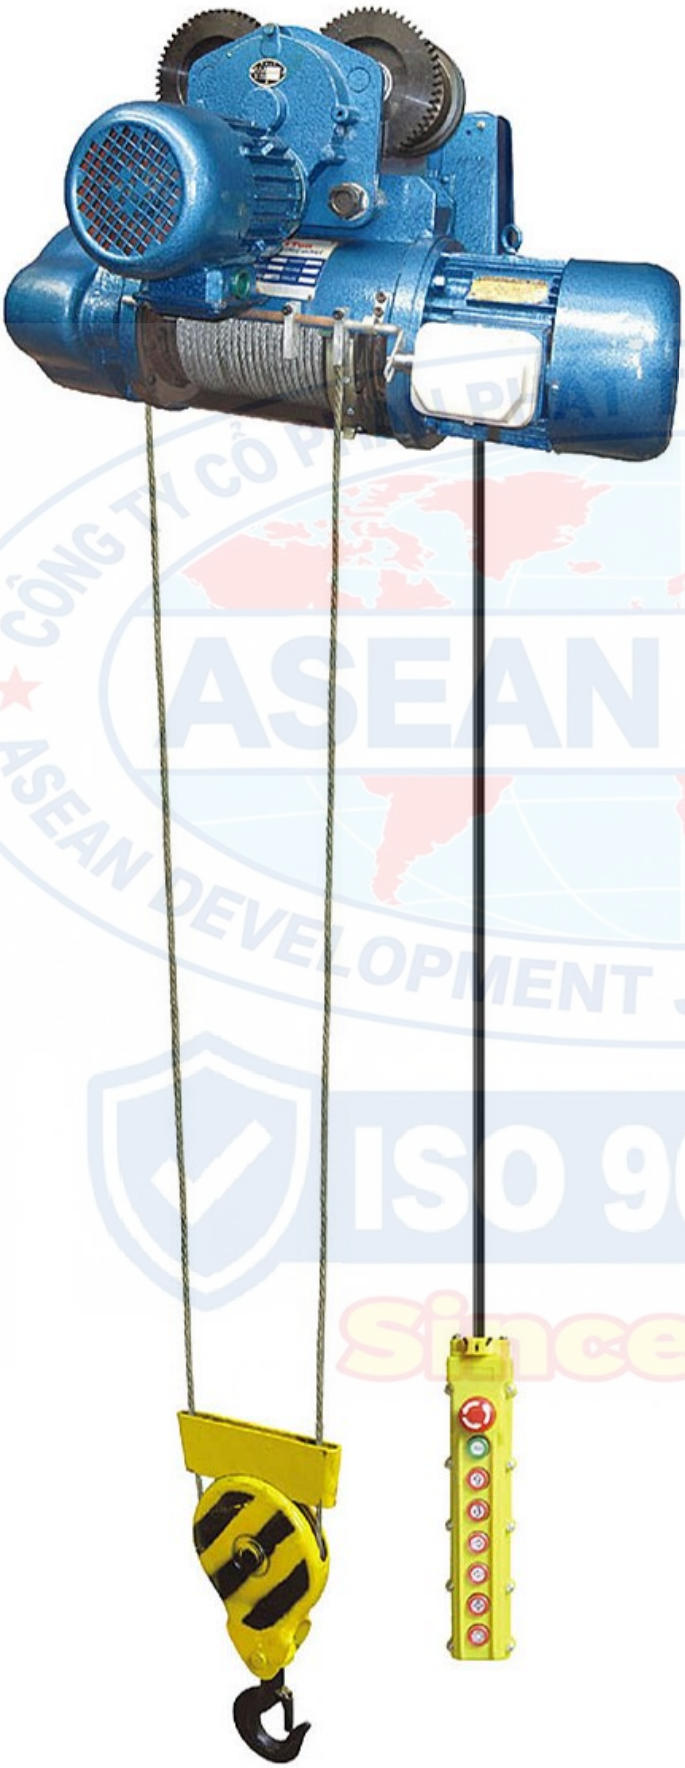


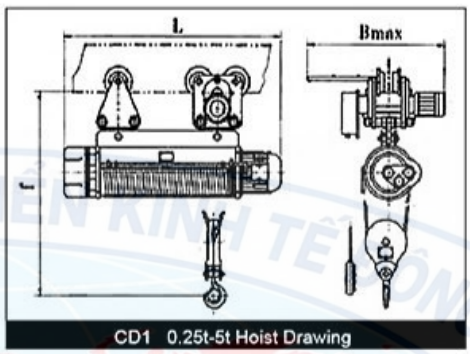


CD1 0.25t-5t Hoist Drawing

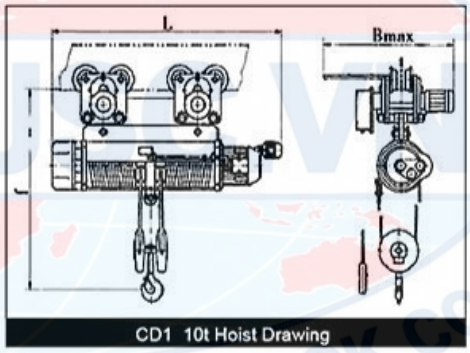


CD1 10t Hoist Drawing

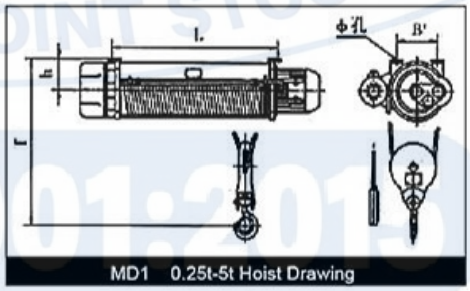

MD1 0.25t-5t Hoist Drawing

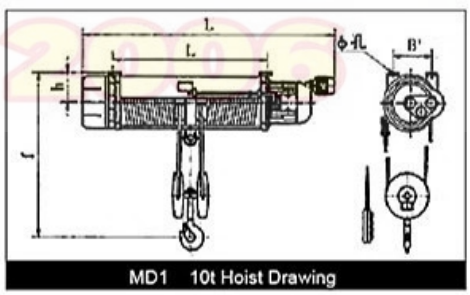

MD1 10t Hoist Drawing

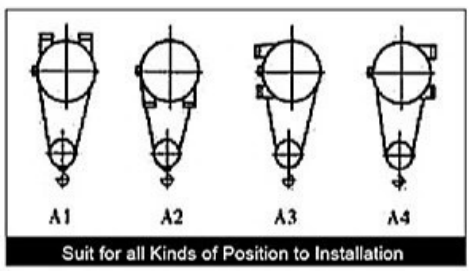

Suit for all Kinds of Position to Installation





CD(MD) 钢丝绳电动葫芦 WIRE ROPE HOIST

CD1(MD1) 0.25t - 2t

Capacity		t	0.25	0.5	1	2
Lifting height		m	3 6 9 12	6 9 12 18	6 9 12 18 24 30	6 9 12 18 24 30
Lifting speed		m/min	8	8(8/0.8)	8(8/0.8)	8(8/0.8)
Running speed		m/min	20	20	20	20
I-Beam track modle (GB706-88)			12-20b	16-28b	16-28b	20a-32c
Min. Radius		m	1 1 1 1	1.5 2	1.5 2 2.5 3.5	1.8 2 2.5 3.5
Motor power		kw	0.4	0.8(0.8/0.2)	1.5(1.5/0.2)	3(3/0.4)
Running motor power		kw	0.06	0.2	0.2	0.4
L		mm	386 386 549 615	616 688 760 904	760 855 955 1150 1345 1540	820 920 1020 1220 1420 1620
L (MD1)		mm		626 698 770 914	770 865 965 1160 1355 1550	830 930 1030 1230 1430 1630
L^1		mm	104 104 267 333	318 390 462 606	401 499 597 793 989 1185	418 518 618 808 1018 1218
f^1		mm	386	490	645	754
B^1		mm	130	190	196	240
Φ		mm	4-Φ11	4-Φ15	4-Φ19	4-Φ23
b		mm	90	120	127	155
f		mm	421 432	550 650	719 810	856 956
B max		mm	398 415	897	897	935
Weight 10%	CD2 Two direction movement. Single speed	kg	33 37 41 45	80 85 90 95	130 140 157 172 186 203	174 190 208 232 260 284
	CD1 Four direction movement. Single speed	kg	41 45 49 60	118 136 153 198	170 180 207 222 236 253	230 244 299 315 337 357
	MD2 Two direction movement. Double speed	kg		88 93 98 103	138 148 165 180 194 211	184 200 218 242 270 294
	MD1 Four direction movement. Double speed	kg		135 140 160 170	183 190 225 240 254 271	269 284 335 369 379 404

CD(MD) 钢丝绳电动葫芦 WIRE ROPE HOIST

CD1(MD1) 3t - 10t

Capacity		t	3	5	10
Lifting height		m	6 9 12 18 24 30	6 9 12 18 24 30	6 9 12 18 24 30
Lifting speed		m/min	8(8/0.8)	8(8/0.8)	7(7/0.7)
Running speed		m/min	20	20	20
I-Beam track modle (GB706-88)			20a-32c	25a-63c	25a-63c
Min. Radius		m	1.8 2 3 4	1.8 2 2.5 3.5	2.5 3 3.5 4.5 6 7.2
Motor power		kw	4.5(1.5/0.4)	7.5(7.5/0.8)	13(13/1.5)
Running motor power		kw	0.4	0.8	2x0.8
L		mm	930 1030 1136 1342 1548 1754	1052 1157 1262 1472 1682 1892	1501 1682 1863 2225 2587 2949
L (MD1)		mm	940 1040 1146 1352 1558 1764	1062 1167 1272 1482 1692 1902	2049 2230 2411 2773 3135 3497
L^1		mm	451 554 657 863 1069 1275	485 590 695 905 1115 1325	849 1030 1211 1573 1935 2297
f^1		mm	866	1014	1081
B^1		mm	264	320	376
Φ		mm	4-Φ25	4-Φ32	4-Φ38
b		mm	175	203	255
f		mm	961 1064	1177 1327	1350
B max		mm	935	1067	1067
Weight 10%	CD2 Two direction movement. Single speed	kg	234 250 276 310 344 374	392 410 431 476 505 545	764 820 874 1001 1090 1174
	CD1 Four direction movement. Single speed	kg	308 330 392 408 434 472	494 517 601 648 691 735	1010 1066 1120 1232 1336 1440
	MD2 Two direction movement. Double speed	kg	244 260 286 320 354 384	417 435 458 501 530 570	824 880 934 1061 1150 1234
	MD1 Four direction movement. Double speed	kg	323 335 395 429 463 493	530 553 594 641 684 728	1070 1126 1180 1292 1396 1500



CHAIN BLOCKS
手拉葫芦

HSZ-B


Features:

Chain block is widely used in factories, miners, docks, warehouses, construction sites, agriculture and other fields, to lift goods and lifting equipment, in particular in conditions with no power supply or narrow, demonstrate superiority.






CÔNG TY CỔ PHẦN PHÁT TRIỂN KINH TẾ ĐÔNG NAM Á
ASEAN JSC.VN
ASEAN ECONOMIC DEVELOPMENT JOINT STOCK COMPANY
ISO 9001:2015
Since 2006

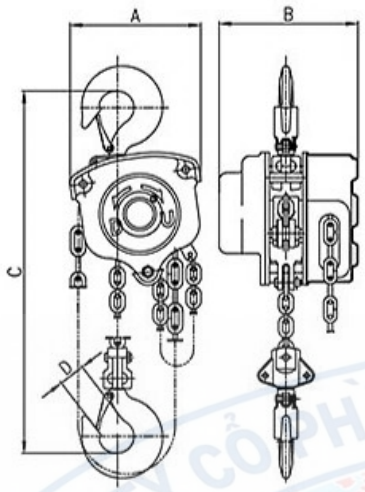

HSZ-B Chain Block (Single Chain)

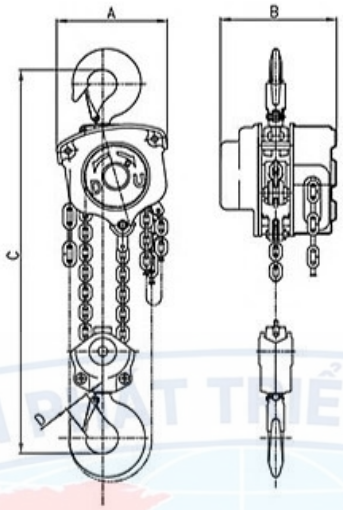


HSZ-B Chain Block (Double Chain)





Optional features:
Overload protection system
Cast safety latches
G-80 electrophoresis chain
Special surface treatment of spare parts







HSZ-B 手拉葫芦 CHAIN BLOCKS

0.5 Ton - 30 Ton

Model		HSZ-0.5B	HSZ-1B	HSZ-1.5B	HSZ-2BS	HSZ-2BD	HSZ-3B	HSZ-5B	HSZ-10B	HSZ-15B	HSZ-20B	HSZ-30B
Rated load (T)		0.5	1	1.5	2	2	3	5	10	15	20	30
Standard lift (m)		2.5	2.5	2.5	2.5	2.5	3	3	3	3	3	3
Test load (T)		0.75	1.5	2.25	3	3	4.5	7.5	12.5	18.75	25	37.5
Efforts required at capacity (N)		262	324	395	380	330	402	430	438	447	438	442
Diameter of load chain (mm)		5	6	7.1	8	6	7.1	10	10	10	10	10
No. of load chains		1	1	1	1	2	2	2	4	6	8	12
Dimensions (mm)	A	127	156	180	181	156	180	230	410	410	645	710
	B	115	131	142	148	131	142	171	171	204	215	398
	C	288	334	415	435	459	536	660	738	1028	1002	1050
	D	25	25	38	35	36	37	50	65	85	85	85
Net weight (kg)		7	10.5	15.5	18.5	16	23	39	69	95	155	237
Extra weight per meter of extra lift (kg)		1.5	1.8	2	2.4	2.7	3.2	5.3	9.8	14.2	19.6	28.3



CHAIN BLOCKS
手拉葫芦

HSZ-D


Features:

Chain block is widely used in factories, miners, docks, warehouses, construction sites, agriculture and other fields, to lift goods and lifting equipment, in particular in conditions with no power supply or narrow, demonstrate superiority.








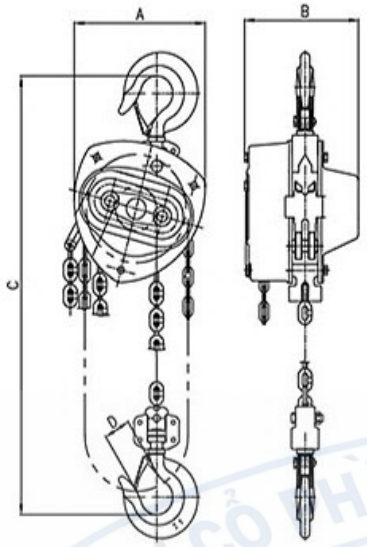


SINGLE CHAIN

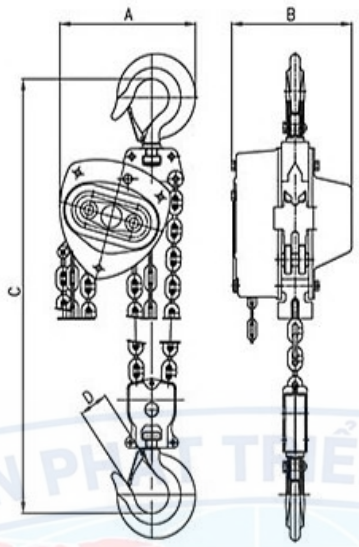

DOUBLE CHAIN




Optional features:
Overload protection system
Cast safety latches
G-80 electrophoresis chain
Special surface treatment of spare parts







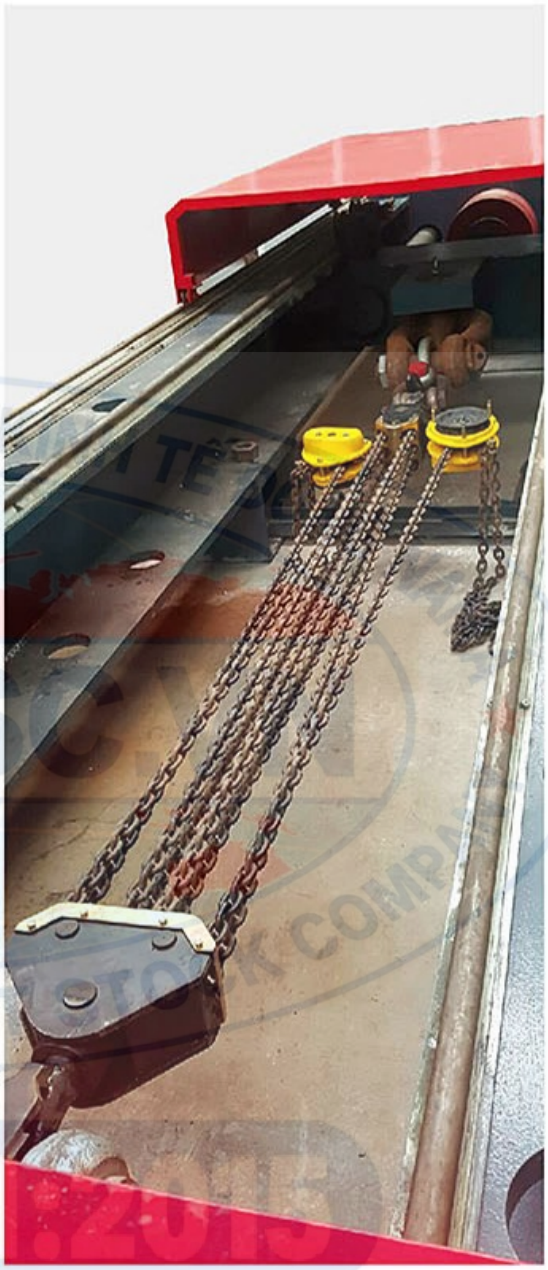

HSZ-D 手拉葫芦 CHAIN BLOCKS

0.5 Ton - 30 Ton

Model		HSZ-0.25D	HSZ-0.5D	HSZ-1D	HSZ-1.5D	HSZ-2D	HSZ-3D	HSZ-5D	HSZ-10D	HSZ-20D	HSZ-30D
Rated load (T)		0.25	0.5	1	1.5	2	3	5	10	20	30
Standard lift (m)		2.5	2.5	2.5	2.5	2.5	3	3	3	3	3
Test load (T)		0.375	0.75	1.5	2.25	3	4.5	7.5	12.5	25	37.5
Efforts required at capacity (N)		187	224	281	290	328	307	332	342	435	417
Diameter of load chain (mm)		4	5	6	7.1	8	7.1	9	9	9	12
No. of load chains		1	1	1	1	1	2	2	4	8	10
Dimensions (mm)	A	120	148	173	196	211	230	279	463	840	703
	B	115	133	150	173	176	174	201	201	201	387
	C	20	346	376	442	470	560	688	765	950	1112
	D	21	28	32	38	40	38	50	64	82	82
Net weight (kg)		7.5	9.3	12	17	19.7	29	42.5	73.6	186.2	238
Extra weight per meter of extra lift (kg)		1.5	1.6	1.8	2.1	2.4	3.1	4.6	9.8	19.6	23.9



CHAIN BLOCKS
手拉葫芦

HSZ-K

Features:

Chain block is widely used in factories, miners, docks, warehouses, construction sites, agriculture and other fields, to lift goods and lifting equipment, in particular in conditions with no power supply or narrow, demonstrate superiority.





Moving products from oneplace to another




Uprooting trees



Laying conduits and pipelines




Installing under-water pump

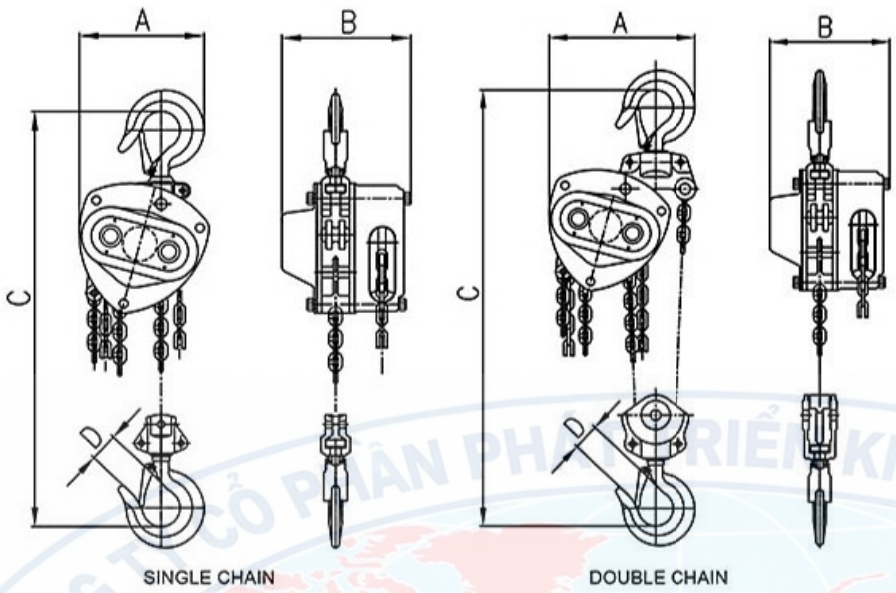

SINGLE CHAIN

DOUBLE CHAIN







Optional features:
Overload protection system
Cast safety latches
G-80 electrophoresis chain
Special surface treatment of spare parts





HSZ-K 手拉葫芦 CHAIN BLOCKS

0.5 Ton - 30 Ton

Model		HSZ-0.5K	HSZ-1K	HSZ-1.5K	HSZ-2K	HSZ-3K	HSZ-5K	HSZ-10K	HSZ-20K	HSZ-30K
Rated load (T)		0.5	1	1.5	2	3	5	10	20	30
Standard lift (m)		2.5	2.5	2.5	2.5	3	3	3	3	3
Test load (T)		0.75	1.5	2.25	3	4.5	7.5	12.5	25	37.5
Efforts required at capacity (N)		262	324	395	330	402	430	438	438	442
Diameter of load chain (mm)		5	6	7.1	6	7.1	10	10	10	10
No. of load chains		1	1	1	2	2	2	4	8	12
Dimensions (mm)	A	120	147	181	158	202	228	373	638	703
	B	116	136	147	136	148	178	178	195	397
	C	285	332	410	470	550	640	737	1022	1050
	D	28	32	38	40	44	50	64	82	82
Net weight (kg)		7	10	15	23	23	38	68	160	235
Extra weight per meter of extra lift (kg)		1.5	1.8	2	3.2	3.2	5.3	9.8	19.6	28.3




CHAIN BLOCKS
手拉葫芦

HSZ-A


Features:

Chain block is widely used in factories, miners, docks, warehouses, construction sites, agriculture and other fields, to lift goods and lifting equipment, in particular in conditions with no power supply or narrow, demonstrate superiority.

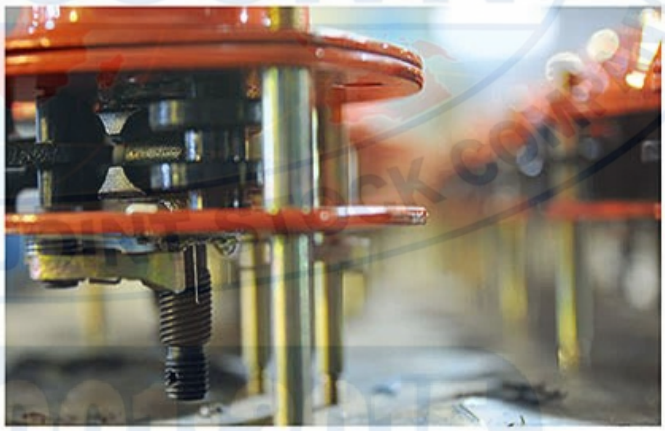




CÔNG TY CỔ PHẦN PHÁT TRIỂN KINH TẾ ĐÔNG NAM Á
ASEAN DEVELOPMENT JOINT STOCK COMPANY
ASEAN JSC.VN
ISO 9001:2015
Since 2015

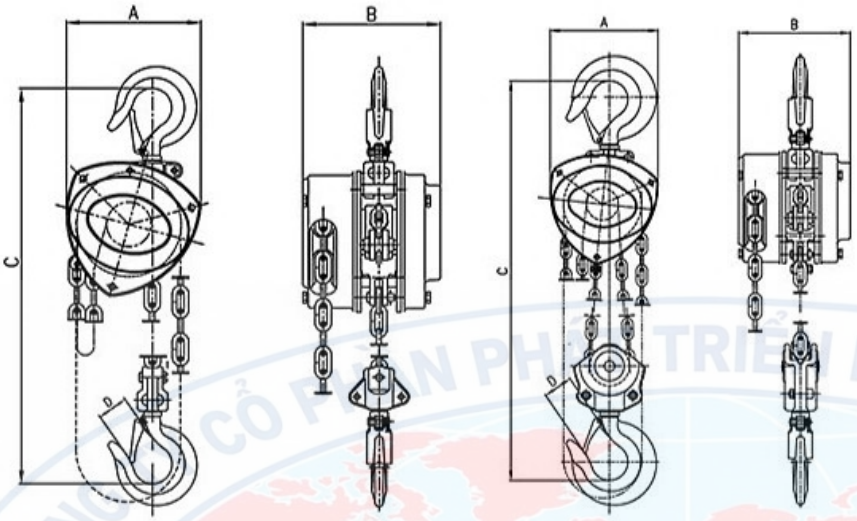

SINGLE CHAIN DOUBLE CHAIN

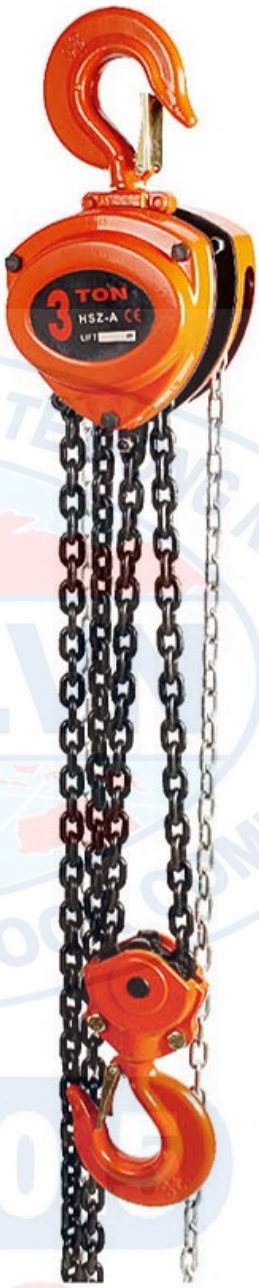



HSZ-A 手拉葫芦 CHAIN BLOCKS

0.5 Ton - 30 Ton


Model		HSZ-0.5A	HSZ-1A	HSZ-1.5A	HSZ-2A	HSZ-3A	HSZ-5A	HSZ-10A	HSZ-20A	HSZ-30A
Rated load (T)		0.5	1	1.5	2	3	5	10	20	30
Standard lift (m)		2.5	2.5	2.5	2.5	3	3	3	3	3
Test load (T)		0.75	1.5	2.25	3	4.5	7.5	12.5	25	37.5
Efforts required at capacity (N)		262	324	395	330	402	430	438	438	442
Diameter of load chain (mm)		5	6	7.1	6	7.1	10	10	10	10
No. of load chains		1	1	1	2	2	2	4	8	12
Dimensions (mm)	A	120	147	181	147	181	224	373	638	703
	B	116	136	147	131	147	177	177	195	397
	C	285	332	410	455	530	620	737	1002	1050
Net weight (kg)		7	10	15	15.5	22	38	69	154	235
Extra weight per meter of extra lift (kg)		1.5	1.8	2	2.7	3.2	5.3	9.8	19.6	28.3



CHAIN BLOCKS
手拉葫芦

HSZ-J

Features:
Chain block is widely used in factories, miners, docks, warehouses, construction sites, agriculture and other fields, to lift goods and lifting equipment, in particular in conditions with no power supply or narrow, demonstrate superiority.

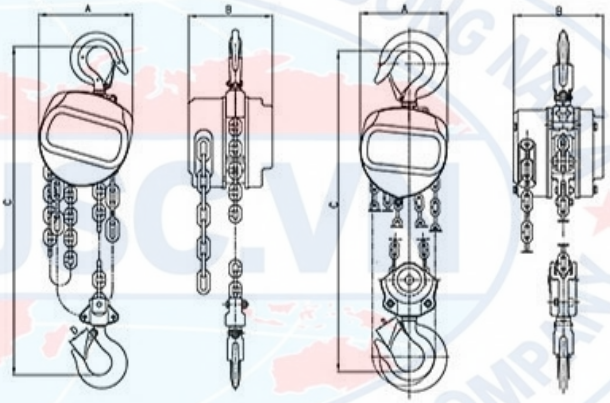

SINGLE CHAIN　　DOUBLE CHAIN




HSZ-J 手拉葫芦 CHAIN BLOCKS

0.5 Ton - 30 Ton

Model		HSZ-0.5J	HSZ-1J	HSZ-1.5J	HSZ-2J	HSZ-3J	HSZ-5J	HSZ-10J	HSZ-20J	HSZ-30J
Rated load (T)		0.5	1	1.5	2	3	5	10	20	30
Standard lift (m)		2.5	2.5	2.5	2.5	3	3	3	3	3
Test load (T)		0.75	1.5	2.25	3	4.5	7.5	12.5	25	37.5
Efforts required at capacity (N)		262	314	343	318	347	382	390	390	394
Diameter of load chain (mm)		5	6	8	6	8	10	10	10	10
No. of load chains		1	1	1	2	2	2	4	8	12
Dimensions (mm)	A	125	147	183	147	183	215	365	595	700
	B	111	126	141	126	141	163	163	191	394
	C	260	275	345	396	486	616	700	1000	1050
	D	28	32	38	40	44	50	64	82	82
Net weight (kg)		8	11	16	16	25	38	69	155	233
Extra weight per meter of extra lift (kg)		1.5	1.7	2.4	2.5	3.7	5.3	9.7	19.4	28.3

CHAIN BLOCKS
手拉葫芦

HSZ-E

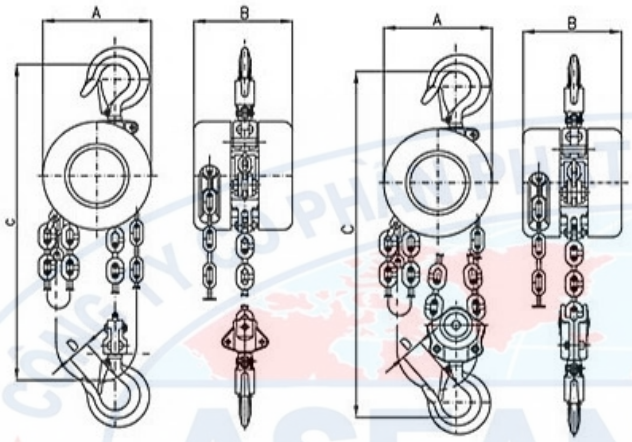

0.5 Ton, 1 Ton, 1.5 Ton

2 Ton, 3 Ton, 5 Ton





HSZ-E 手拉葫芦 CHAIN BLOCKS

0.5 Ton - 30 Ton

Model		HSZ-0.5E	HSZ-1E	HSZ-1.5E	HSZ-2E	HSZ-3E	HSZ-5E	HSZ-10E	HSZ-20E	HSZ-30E
Rated load (T)		0.5	1	1.5	2	3	5	10	20	30
Standard lift (m)		2.5	2.5	2.5	2.5	3	3	3	3	3
Test load (T)		0.75	1.5	2.25	3	4.5	7.5	12.5	25	37.5
Efforts required at capacity (N)		262	314	343	318	347	382	390	390	394
Diameter of load chain (mm)		6	6	8	6	8	10	10	10	10
No. of load chains		1	1	1	2	2	2	4	8	12
Dimensions (mm)	A	142	142	178	142	178	210	358	580	688
	B	126	126	142	126	142	165	165	195	394
	C	280	300	360	380	470	600	730	1000	1050
	D	28	32	38	40	44	50	64	82	82
Net weight (kg)		9.5	10.5	17.5	14.5	23	35	68	155	233
Extra weight per meter of extra lift (kg)		1.7	1.7	2.4	2.5	3.7	5.3	9.7	19.4	28.3




LEVER BLOCKS
手扳葫芦

HSH-V

Features:

The lever block has load control with a mechanical brake, hardened steel hooks with latches.The chain hoist is ideal for warehouse, auto shops, construction site and more operating situations.Built-in gearing can make the chain hoist easy to use. One-hand operation allows easy control of load. Super light structure with tough steel construction and compact design can be operated even in high or narrow places.



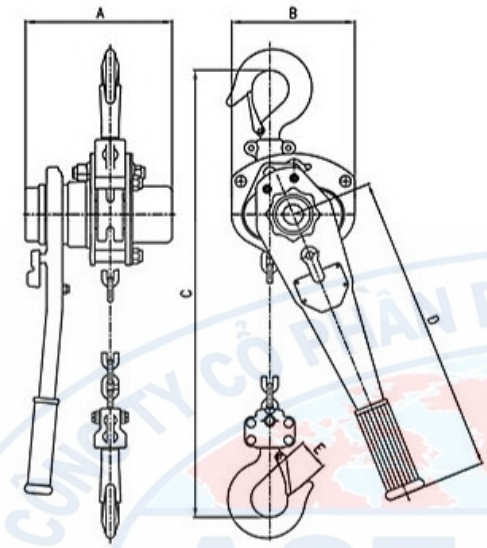

HSH-V -- LEVER BLOCKS





HSH-V 手扳葫芦 LEVER BLOCKS

Model		HSH-V2.5	HSH-V5	HSH-V7.5	HSH-V10	HSH-V15	HSH-V20	HSH-V30	HSH-V60	HSH-V90
Rated load (T)		0.25	0.5	0.75	1	1.5	2	3	6	9
Test load (T)		0.375	0.75	1.125	1.5	2.25	3	4.5	9	13.5
Standard lift (m)		1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Min. distance between two hooks(mm)		205	260	295	295	335	385	450	615	720
Efforts required at capacity (N)		217	303	140	185	234	251	363	370	375
No. of load chains		1	1	1	1	1	1	1	2	3
Diameter of load chain (mm)		4	5	6	6	7.1	8	10	10	10
Dimensions (mm)	A	92	110	152	152	175	175	195	195	195
	B	75	82	128	128	148	160	181	232	366
	C	205	260	295	295	335	385	450	615	720
	D	153	261	256	256	368	368	368	368	368
	E	17	23	26	26	30	33	34	47	64
Net weight (kg)		1.85	4.6	7.7	8	10.6	14.8	20	28	46




LEVER BLOCKS
手扳葫芦

HSH-C


Features:

The lever block has load control with a mechanical brake, hardened steel hooks with latches.The chain hoist is ideal for warehouse, auto shops, construction site and more operating situations.Built-in gearing can make the chain hoist easy to use. One-hand operation allows easy control of load. Super light structure with tough steel construction and compact design can be operated even in high or narrow places.

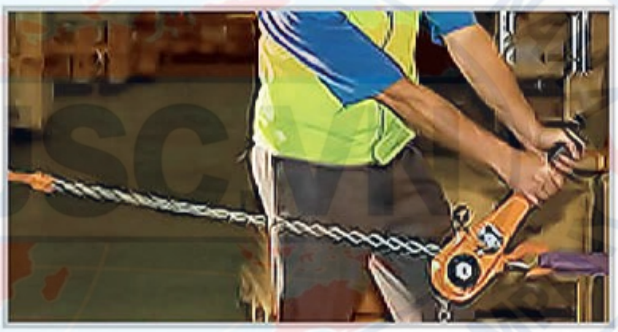





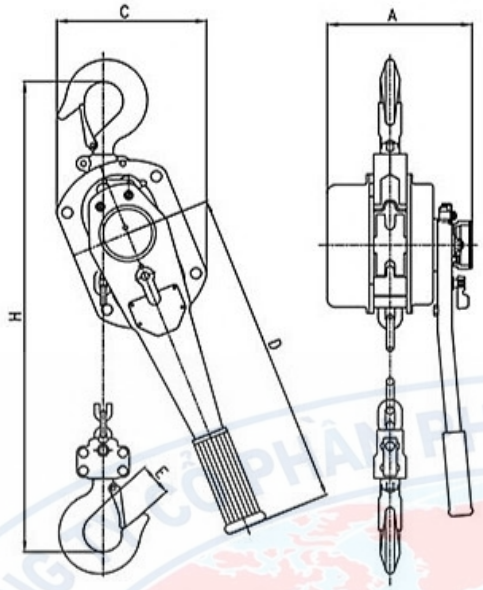

HSH-C -- LEVER BLOCKS





HSH-C 手扳葫芦 LEVER BLOCKS

Model		HSH-7.5C	HSH-10C	HSH-15C	HSH-30C	HSH-60C
Rated load (T)		0.75	1	1.5	3	6
Test load (T)		1.125	1.5	2.25	4.5	9
Standard lift (m)		1.5	1.5	1.5	1.5	1.5
Min. distance between two hooks(mm)		295	310	335	405	550
Efforts required at capacity (N)		140	186	234	363	370
No. of load chains		1	1	1	1	2
Diameter of load chain (mm)		6	6	7.1	10	10
Dimensions (mm)	A	148	148	163	191	191
	C	128	128	148	181	244
	H	295	310	335	405	550
	D	256	256	368	368	368
	E	26	26	30	34	47
Net weight (kg)		7.3	7.8	10.4	17.2	26




LEVER BLOCKS
手扳葫芦

HSH-CB

Features:

- Guide slots guard against jamming and slipping
- Roller and ball bearing construction reduces friction
- Automatic double pawl-braking system
- Hardened swivel latch hooks
- Self-locking lever controls the pulling direction
- 360° handle rotation and pivot & swivel top hook for easy rigging
- All-steel construction for extreme durability
- Hook is assembled with high-strength locking fasteners
- Rubber handle grip on lever for comfort and anti-skidding
- One-hand operation with the best free chaining available

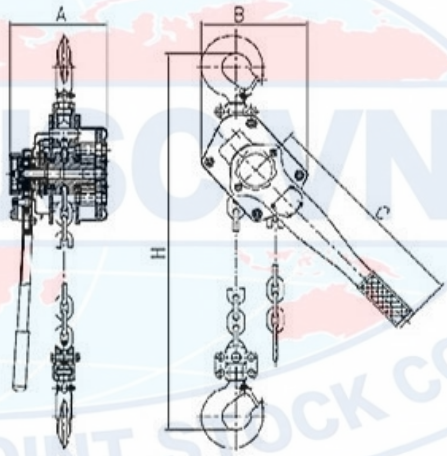

HSH-CB -- LEVER BLOCKS



HSH-CB 手扳葫芦 LEVER BLOCKS

Model		HSH-7.5CB	HSH-15CB	HSH-30CB	HSH-60CB
Rated load (T)		0.75	1.5	3	6
Test load (T)		0.95	1.875	3.75	7.5
Standard lift (m)		1.5	1.5	1.5	1.5
Min. distance between two hooks(mm)		290	385	477	550
Efforts required at capacity (N)		196	220	325	343
No. of load chains		1	1	1	2
Diameter of load chain (mm)		6x18	8x24	10x30	10x30
Dimensions	A	148	174	193	193
	B	135	160	209	263
	C	295	423	423	423
	H	290	385	477	550
Extra weight per meter of extra lift(kg)		0.82	1.43	2.21	4.42
Net weight (kg)		7	11	20	30




LEVER BLOCKS
手扳葫芦

MINI-250
MINI-500

Features:

The lever block has load control with a mechanical brake, hardened steel hooks with latches.The chain hoist is ideal for warehouse, auto shops, construction site and more operating situations.Built-in gearing can make the chain hoist easy to use. One-hand operation allows easy control of load. Super light structure with tough steel construction and compact design can be operated even in high or narrow places.

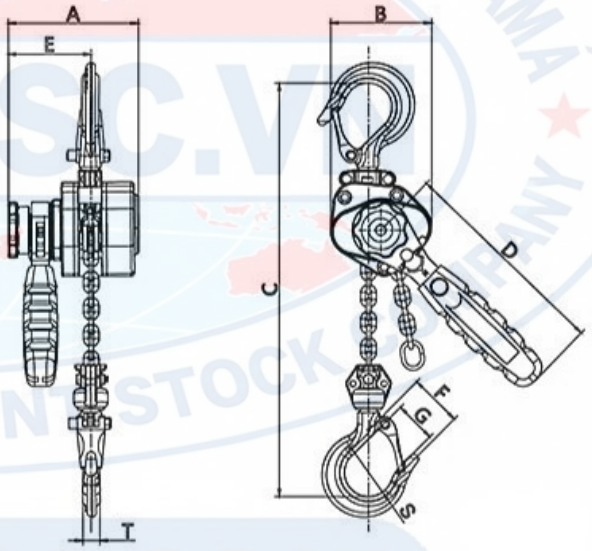

MINI -- LEVER BLOCKS



MINI 手扳葫芦 LEVER BLOCKS

0.25 Ton / 0.5 Ton

Model	W.L.L (Ton)	Lift (m)	Test Load (t)	Headroom [hook to hook] H min(mm)	Effort to lift full load (kg)	No. of load chain fall lines	Load Chain (mm)	Dimensions(mm) A	B	C	D	E	E1	Φ	Hmin	Net Weight (kg)	Extra Weight Per Meter of Extra Lift(mm)
MINI-250	0.25	1	0.375	215	13	1	Φ4x12	75	116	41	157	18	15.5	25	215	2	0.35
MINI-500	0.5	1.5	0.75	255	18.5	1	Φ5x15	90	135	51.5	180	24	21	32	255	3.5	0.55




PERMANENT MAGNETIC LIFTER
永磁器

YC

Features:

- Widely used in machining and mould processing industry.
- Using high-performance permanent magnetic materials, with strong magnetic force, unique circuit design , remanence almost zero.
- High safety factor, maximal magnetic force is 3.5 times of rated lifting capacity.
- Handle switches with safety button, easy for Single-hand operation, more safety and convenience.
- Without electricity, magnetic force permanent, more safety in using, and can be operated in the field.

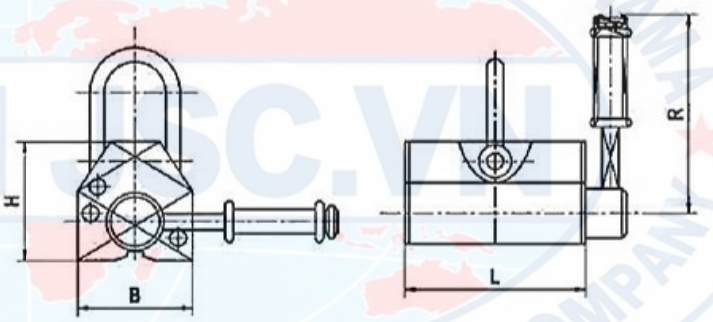




3.5 times (1,000kg) magnetic test



Shackle



Operation handle

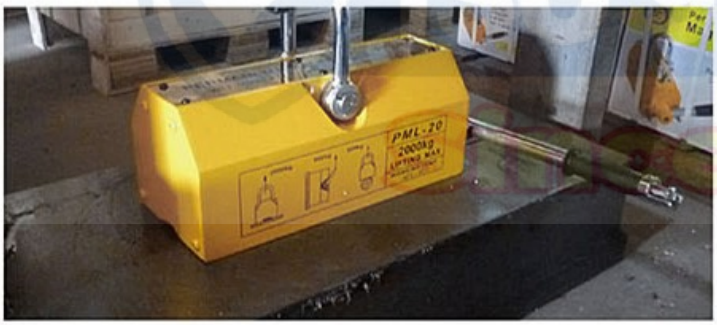






Model	YC-100	YC-300	YC-500	YC-600	YC-1000	YC-2000	YC-3000	YC-5000
Rated lifting strength (KGF)	100	300	500	600	1000	2000	3000	5000
Cylindrical lifting strength (KGF)	50	150	250	300	500	1000	/	/
Max. pull-off strength (KGF)	350	1050	1750	2100	3500	7000	10500	17500
L	92	163	216	234	264	370	452	720
B	62	92	120	122	172	232	274	296
H	67	93	116	118	168	221	266	266
R	140	180	220	220	260	450	520	700
Operation temperature(°C)	<80	<80	<80	<80	<80	<80	<80	<80
Dead weight (kg)	3	10	21	24	50	125	220	398

WIRE ROPE PULLING HOIST
钢丝绳手拉葫芦

ZNL

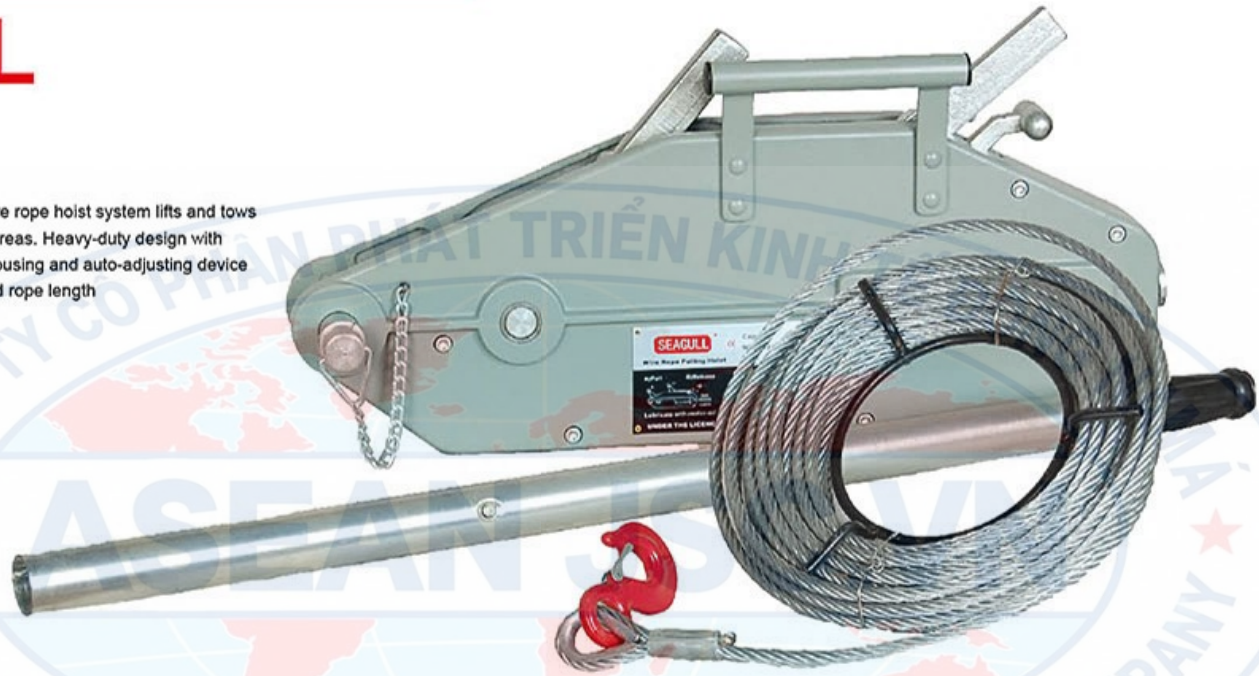

Features:

Multifunctional wire rope hoist system lifts and tows in different work areas. Heavy-duty design with aluminum-alloy housing and auto-adjusting device allows for required rope length






- 1x19 the 19 wire rope. Some dia is big, some dia is small
- A bunch of 1x19 stranding is 45 degree until round
- Total 6x19 + IWS is round
- 1770 Mpa



Grip jaw different hardness for 0.8t - 1.6t, 3.2t - 5.4t to extend the wire rope life



Specially precision grinding to extend the wire rope life



Each alex do the magnetic test to avoid any slight crackle alex assembly on the WRPH

Model		ZNL-800	ZNL-1600	ZNL-3200	ZNL-5400
Rated forward hand power (N)		341	438	438	745
Rated capacity (kg)		800	1600	3200	5400
Rated forward travel (Swing it forward and backward)		≥52	≥55	≥28	≥30
Rope diameter (mm)		8.3	11	16	20
Wire rope safety factor load capacity (times)		5	5	5	5
Safety factor & static load capacity (times)		4	4	4	4
Max. travelling load (kg)		1200	2400	4000	8000
Max. outer size	A	426	545	660	930
(mm)	B	238	284	325	480
	C	64	97	116	152
L1(cm)		80	80	80	80
L2(cm)		80	120	120	120
Net weight (kg)		14.6	26.4	49.3	98







GEARED TROLLEY
手拉小车

CSL-Y4

Features:

The manual trolley is heavy-duty side frames and fully machined wheel tread for a superior performance over a long life. Trolleys are equipped with Lifetime lubricated and precision ball bearings. Heavy rolled steel side frames extend beyond the wheels to provide these trolleys with superior strength, rigidity and added protection for the trackwheels. Units operate on universal wheel treads for use on flat or tapered beam flanges. Trolley wheels are fully machined from alloy cast iron and hardened for high strength and long life.

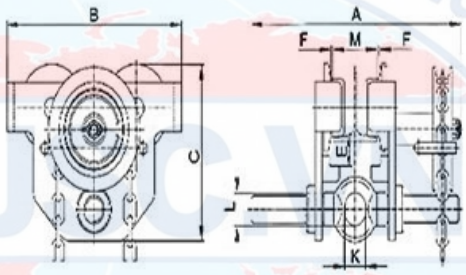

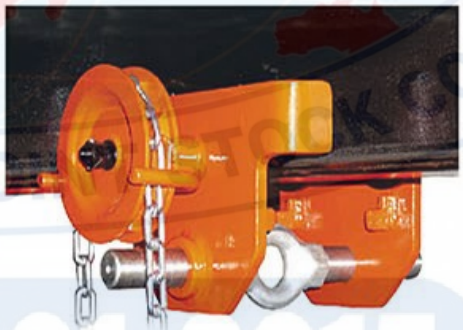

CSL-Y4 手拉小车 GEARED TROLLEY

Model		0.5t	1t	2t	3t	5t
Rated capacity (T)		0.5	1	2	3	5
Test load (Kn)		6.25	12.5	25	37.5	62.5
Running height (m)		3	3	3	3	3
Chain pull to lift full load (N)		45	55	100	75	120
Min radius of curve (m)		0.9	1	1.2	1.3	1.4
Dimensions (mm)	A Pylon	292	300	314	350	359
	Lengthen pylon	377	385	395	409	414
	B	225	252	300	360	392
	C	173	188	226	289	313
	E	33	31	32	46	47
	F	≈3	≈3	≈3	≈3	≈3
	K	25	30	40	48	60
	L	30	35	47	58	70
Adjustable beam width	M Pylon	50-220	58-220	66-220	74-220	90-220
	Lengthen pylon	160-305	160-305	160-305	160-305	160-305
Extra weight per meter of extra lift (kg)		≈1	≈1	≈1	≈1	≈1
Net weight (kg)	Pylon	11.4	14.7	21.8	36.7	48.5
	Lengthen pylon	11.8	15.2	22.6	37.9	50





PLAIN TROLLEY
手推小车

CST-Y4

Features:


The manual trolley is heavy-duty side frames and fully machined wheel tread for a superior performance over a long life. Trolleys are equipped with Lifetime lubricated and precision ball bearings. Heavy rolled steel side frames extend beyond the wheels to provide these trolleys with superior strength, rigidity and added protection for the trackwheels. Units operate on universal wheel treads for use on flat or tapered beam flanges. Trolley wheels are fully machined from alloy cast iron and hardened for high strength and long life.

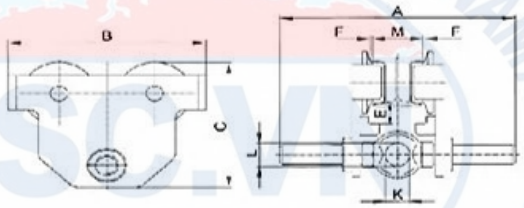

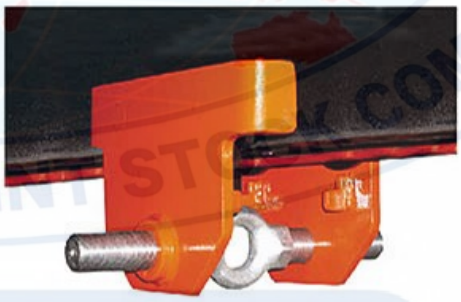

CST-Y4 手推小车 PLAIN TROLLEY

Model		0.5t	1t	2t	3t	5t
Rated capacity (T)		0.5	1	2	3	5
Test load (Kn)		6.25	12.5	25	37.5	62.5
Running height (m)		/	/	/	/	/
Chain pull to lift full load (N)		/	/	/	/	/
Min radius of curve (m)		0.9	1	1.2	1.3	1.4
Dimensions (mm)	A Pylon	292	300	310	324	329
	Lengthen pylon	377	385	395	409	414
	B	225	252	300	360	392
	C	173	188	226	289	313
	E	33	31	32	46	47
	F	≈3	≈3	≈3	≈3	≈3
	K	25	30	40	48	60
	L	30	35	47	58	70
Adjustable beam width	M Pylon	50-220	58-220	66-220	74-220	90-220
	Lengthen pylon	160-305	160-305	160-305	160-305	160-305
Extra weight per meter of extra lift (kg)		/	/	/	/	/
Net weight (kg)	Pylon	8.2	10.3	17.5	30.7	42.4
	Lengthen pylon	8.6	10.8	18.3	31.9	43.9

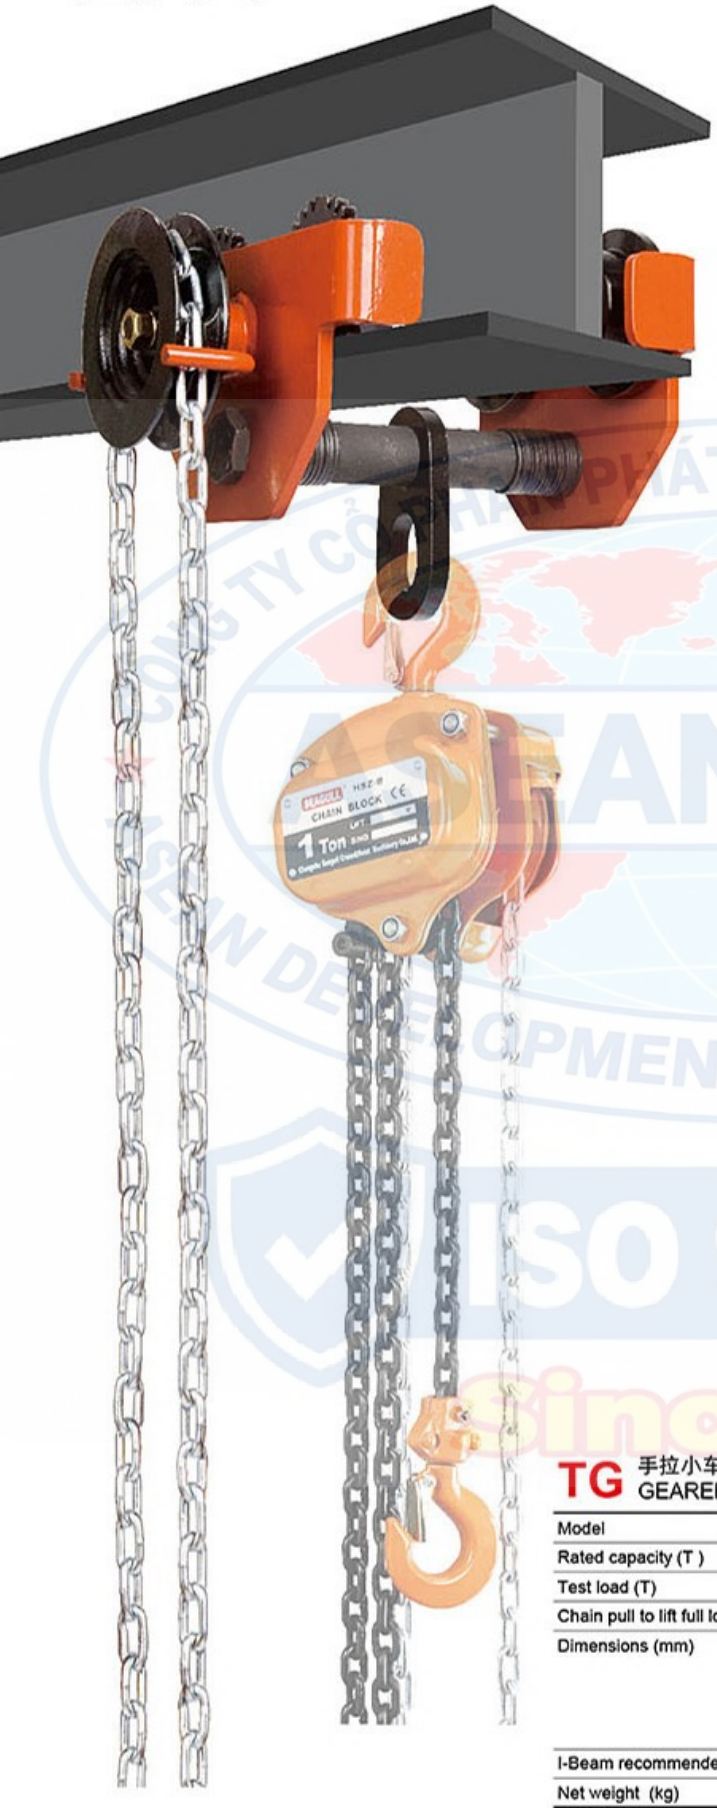


GEARED TROLLEY
手拉小车

TG

Features:


The manual trolley is heavy-duty side frames and fully machined wheel tread for a superior performance over a long life. Trolleys are equipped with Lifetime lubricated and precision ball bearings. Heavy rolled steel side frames extend beyond the wheels to provide these trolleys with superior strength, rigidity and added protection for the trackwheels. Units operate on universal wheel treads for use on flat or tapered beam flanges. Trolley wheels are fully machined from alloy cast iron and hardened for high strength and long life.

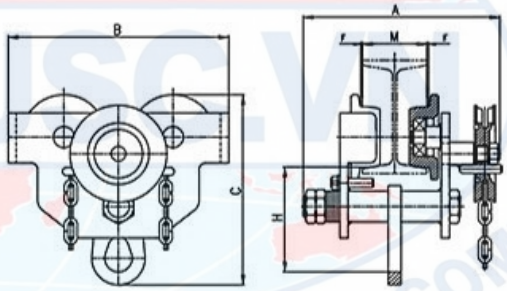



TG 手拉小车 GEARED TROLLEY

Model		0.5	1	2	3	5	10	20	30
Rated capacity (T)		0.5	1	2	3	5	10	20	30
Test load (T)		0.75	1.5	3	4.5	7.5	15	30	37.5
Chain pull to lift full load (N)		60	80	140	150	170	320	340	352
Dimensions (mm)	A	248	280	318	340	365	410	475	392
	B	196	236	273	320	366	389	798	625
	C	190	211	236	295	334	460	575	551
	H	108	115	130	164	177	237	300	260
I-Beam recommended		68-126	80-146	80-168	88-168	100-170	122-203	122-203	150-250
Net weight (kg)		9	13	18	25	39	70	186	245

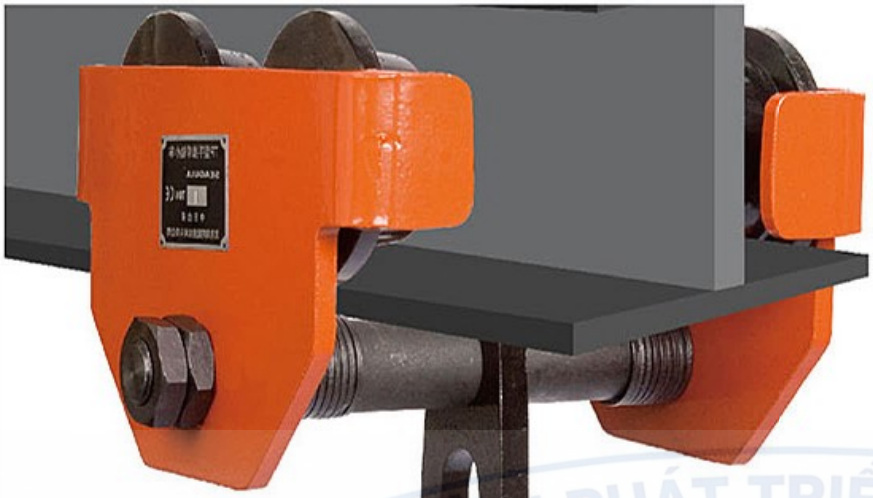



PLAIN TROLLEY
手推小车


TP

Features:

The manual trolley is heavy-duty side frames and fully machined wheel tread for a superior performance over a long life. Trolleys are equipped with Lifetime lubricated and precision ball bearings. Heavy rolled steel side frames extend beyond the wheels to provide these trolleys with superior strength, rigidity and added protection for the trackwheels. Units operate on universal wheel treads for use on flat or tapered beam flanges. Trolley wheels are fully machined from alloy cast iron and hardened for high strength and long life.

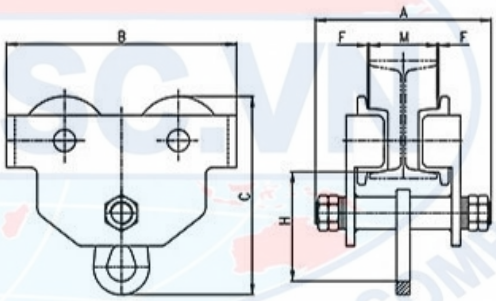

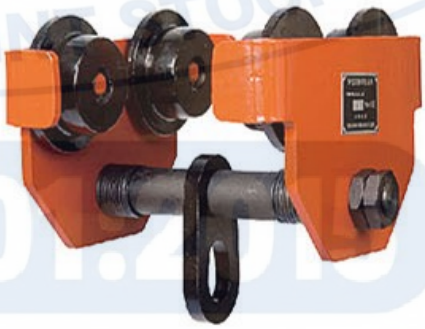


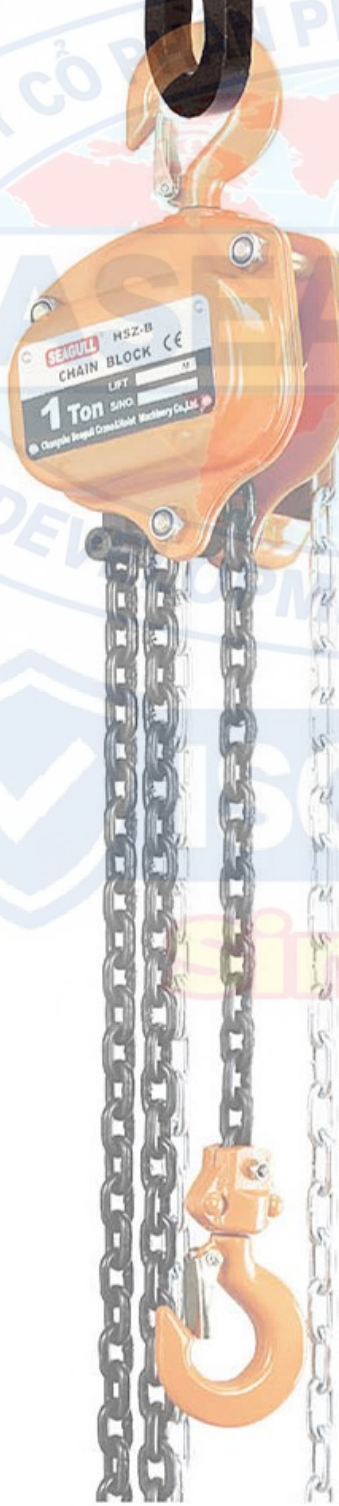

TP 手推小车 PLAIN TROLLEY

Model		0.5	1	2	3	5	10
Rated capacity (T)		0.5	1	2	3	5	10
Test load (T)		0.75	1.5	3	4.5	7.5	15
Dimensions (mm)	A	208	242	280	300	316	343
	B	196	236	273	320	366	389
	C	190	211	236	295	334	460
	H	108	115	130	164	177	237
I-Beam recommended		68-126	80-146	80-168	88-168	100-170	122-203
Net weight (kg)		5.5	9.5	13.5	25	36	68

CÔNG TY CỔ PHẦN PHÁT TRIỂN ASEAN
ASEAN DEVELOPMENT JOINT STOCK COMPANY
ISO 9001:2015
Since 2006

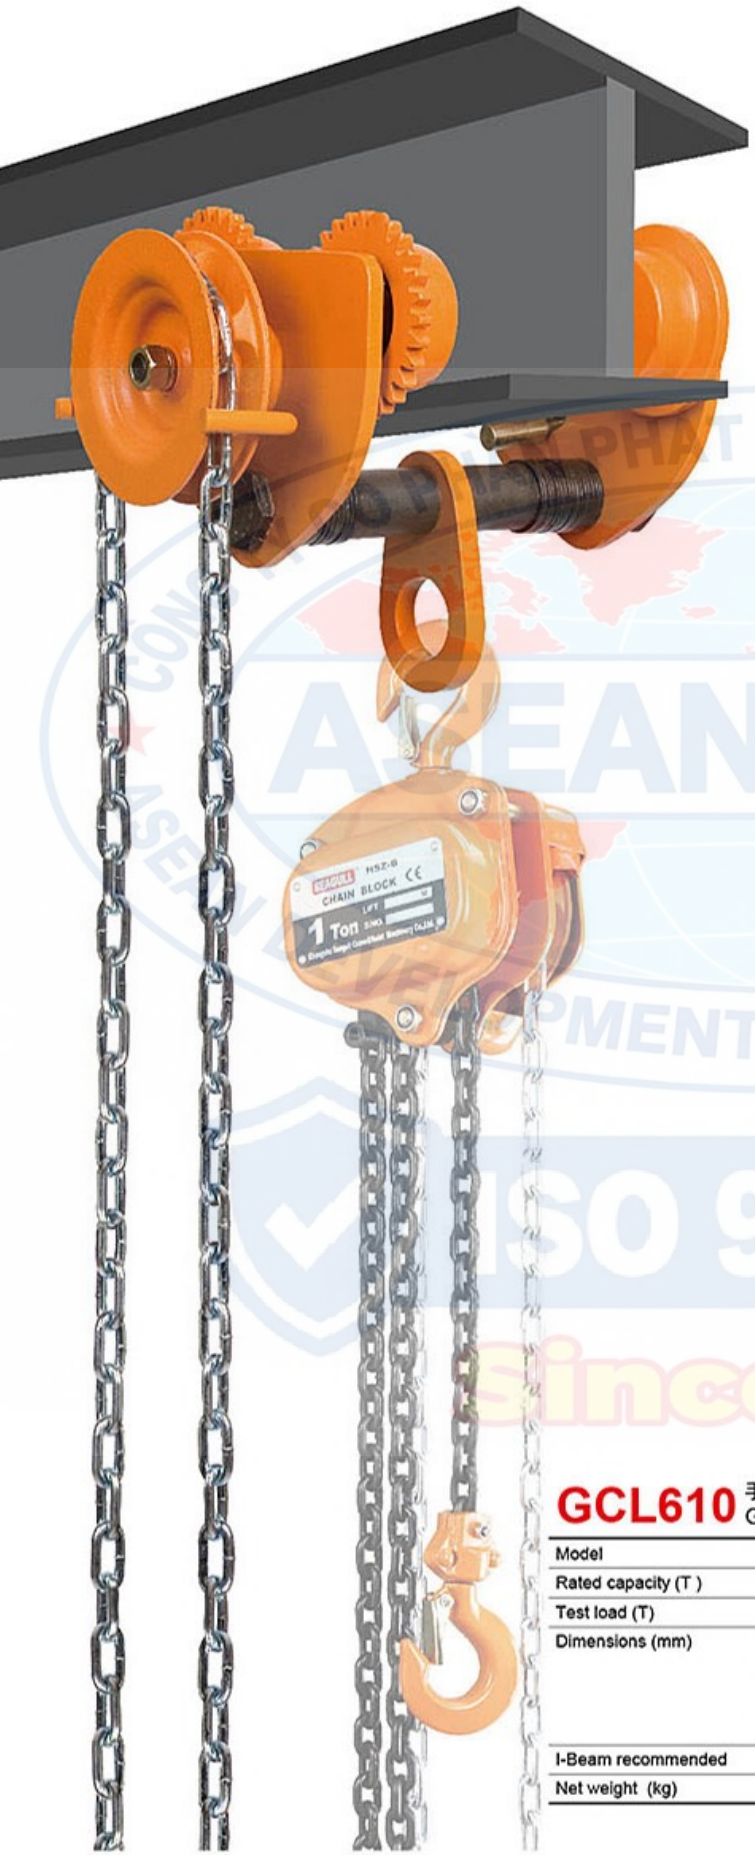


GEARED TROLLEY
手拉小车

GCL610

Features:

The manual trolley is heavy-duty side frames and fully machined wheel tread for a superior performance over a long life. Trolleys are equipped with Lifetime lubricated and precision ball bearings. Heavy rolled steel side frames extend beyond the wheels to provide these trolleys with superior strength, rigidity and added protection for the trackwheels. Units operate on universal wheel treads for use on flat or tapered beam flanges. Trolley wheels are fully machined from alloy cast iron and hardened for high strength and long life.

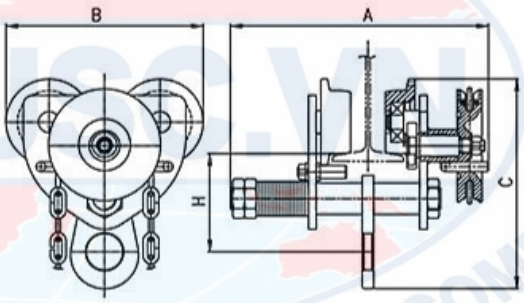



GCL610 手拉小车 GEARED TROLLEY

Model		0.5	1	1.5	2	3	5	10
Rated capacity (T)		0.5	1	1.5	2	3	5	10
Test load (T)		0.75	1.5	2.25	3	4.5	7.5	15
Dimensions (mm)	A	271	271	308	308	342	384	442
	B	172	206	231	240	279	318	380
	C	190	222	238.5	267	319	384	490
	H	108.5	122	130	132.5	181	219	275
I-Beam recommended		75-125	75-125	100-150	100-150	100-150	125-175	125-180
Net weight (kg)		8	12.5	15	16.5	23	37	68




PLAIN TROLLEY
手推小车

GCT610

Features:

The manual trolley is heavy-duty side frames and fully machined wheel tread for a superior performance over a long life. Trolleys are equipped with Lifetime lubricated and precision ball bearings. Heavy rolled steel side frames extend beyond the wheels to provide these trolleys with superior strength, rigidity and added protection for the trackwheels. Units operate on universal wheel treads for use on flat or tapered beam flanges. Trolley wheels are fully machined from alloy cast iron and hardened for high strength and long life.

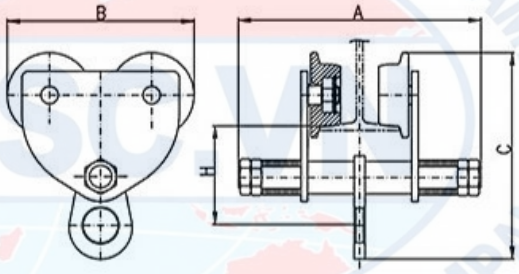



GCT610 手推小车 PLAIN TROLLEY


Model		0.5	1	1.5	2	3	5	10
Rated capacity (T)		0.5	1	1.5	2	3	5	10
Test load (T)		0.75	1.5	2.25	3	4.5	7.5	15
Dimensions (mm)	A	208	220	260	260	285	338	362
	B	172	206	231	240	279	318	380
	C	190	222	238.5	267	319	384	490
	H	108.5	122	130	132.5	181	219	275
I-Beam recommended		75-125	75-125	100-150	100-150	100-150	125-175	125-180
Net weight (kg)		5.5	8	13	14	21	35	66

MECHANICAL JACK
千　　斤　　顶


Features:

Mechanical jack is a widely used for repairing the vehicles and lifting the tracks. It is strong in construcion with high safety factor. Easy to use and top welcome in the industrial and mining enterprises.



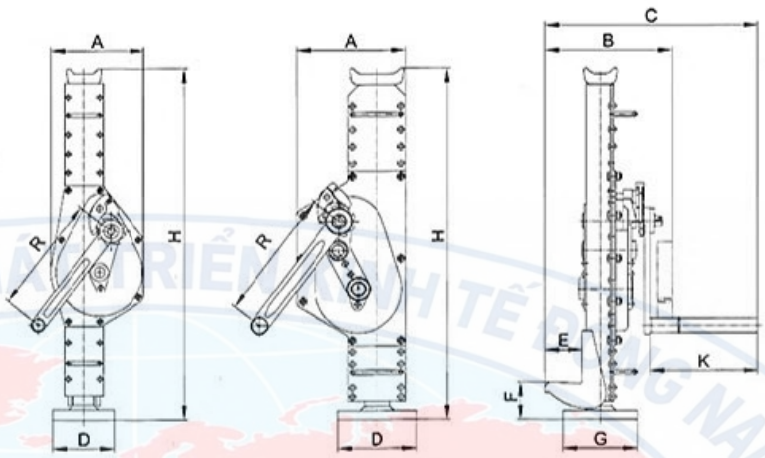



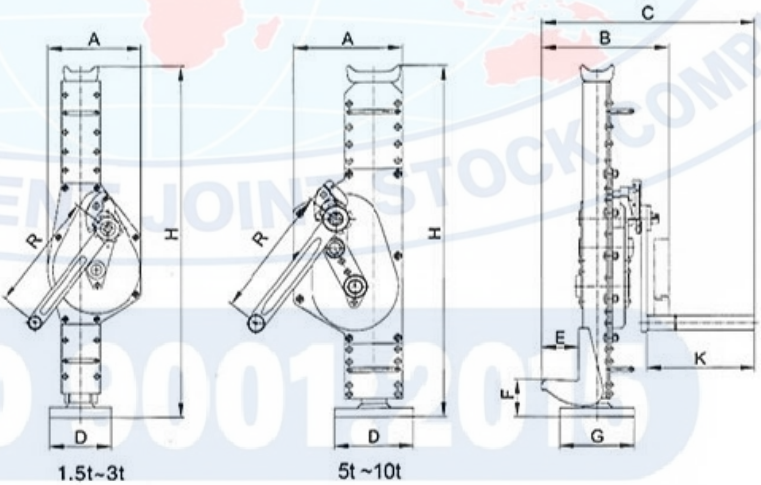


MODEL		1.5t	3t	5t	10t	16t	20t	25t	1.5t	3t	5t	10t
RATED CAPACITY (t)		1.5	3	5	10	16	20	25	1.5	3	5	10
TEST LOAD (kn)		18.4	36.8	61.3	122.5	196	245	306.3	18.4	36.8	61.3	122.5
CHAIN SHAKE TO LIFT FULL LOAD (N)		150	280	280	560	640	640	640	150	280	280	560
STROKE (mm)		300	350	350	410	320	320	320	300	350	350	410
MIN. LIFTING	F	60	70	80	85	95	100	110	25	40	40	40
HEIGHT (mm)	H	600	730	730	800	800	860	970	600	735	735	805
DIMENSIONS	A	163	197	189	250	275	275	350	163	197	189	250
(mm)	B	190	200	239	293	320	335	340	206	219	258	318
	C	273	296	335	498	514	529	538	289	316	355	523
	D	100	130	140	140	150	150	170	160	170	200	220
	E	55	60	71	86	78	78	80	55	60	70	86
	G	110	140	170	170	180	180	200	140	150	170	170
	K	113	127	127	248	250	250	250	113	127	127	248
	R	225	250	275	300	300	380	380	225	250	275	300
NET WEIGHT (kg)		13.5	21.2	28.5	46.8	65	75	91	14.8	23.3	31.3	49

ASEAN JSC.VN
Since 2006

FARM JACK
农夫顶

JJ

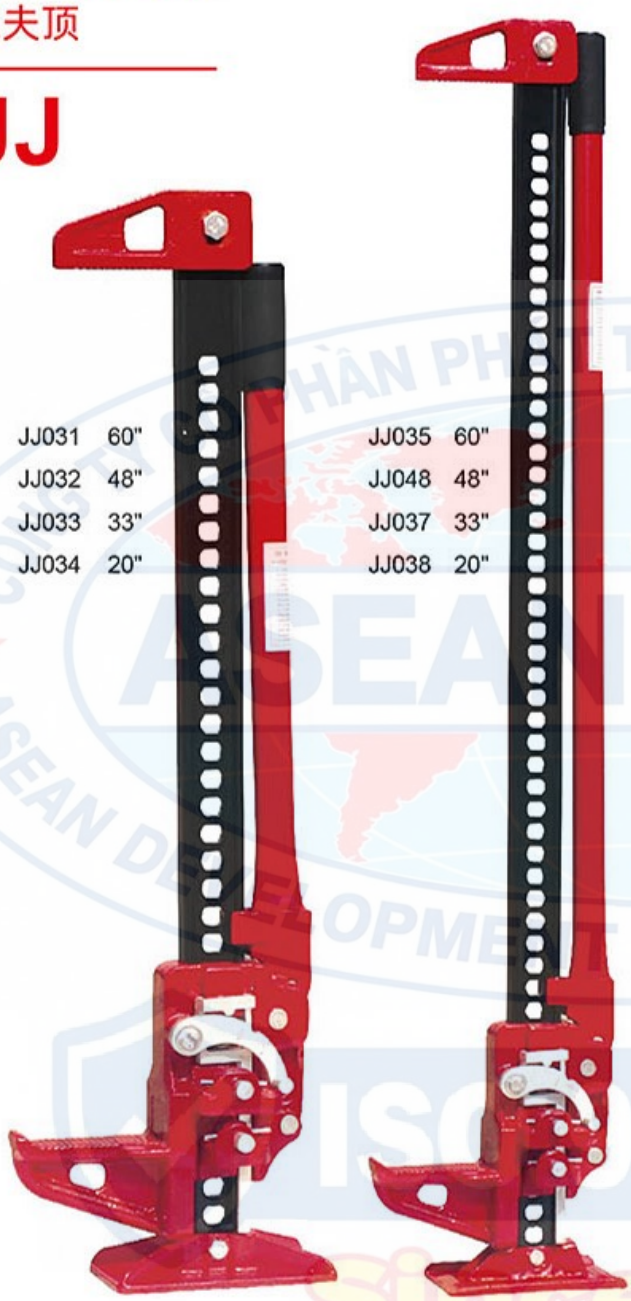

JJ031 60"
JJ032 48"
JJ033 33"
JJ034 20"

JJ035 60"
JJ048 48"
JJ037 33"
JJ038 20"

SAFETY:

1. Be sure base of jack is on firm and level ground
2. Be sure your jack will not slip after load is applied
3. Be sure lifting arm is fully under load is applied
4. Be sure the load is stabilized before lifting so that it will not shift when lifting or lowering
5. Do not work under vehicle after lifting unless you have jack stands supporting the vehicle.
6. Do not push load off the jack; Lower it carefully.
7. DO not use handle extensions.
8. Do not carry jack by handle







JJ035 JJ048 JJ037 JJ038

MODEL	SIZE	MIN.HEIGHT (mm)	MAX.HEIGHT (mm)	N.W. (kg)	PACKAGE SIZE (cm)	QTY (pc)	QTY/20'CY (pcs)
JJ035	60" farm jack	155	1350	15	152X24.5X14	1	550
JJ048	48" farm jack	155	1070	14	124X24.5X14	1	670
JJ037	33" farm jack	155	700	13	92X24.5X14	1	950
JJ038	20" farm jack	155	480	12	54X24.5X14	1	1320

JJ031 JJ032 JJ033 JJ034

MODEL	SIZE	MIN.HEIGHT (mm)	MAX.HEIGHT (mm)	N.W. (kg)	PACKAGE SIZE (cm)	QTY (pc)	QTY/20'CY (pcs)
JJ031	60" farm jack	155	1350	15	152X24.5X14	1	550
JJ032	48" farm jack	155	1070	14	124X24.5X14	1	670
JJ033	33" farm jack	155	700	13	92X24.5X14	1	950
JJ034	20" farm jack	155	480	12	54X24.5X14	1	1320



HYDRAULIC DRUM TRUCK
油桶搬运车

SBL

ITEM	Unit	Model SBL
Capacity	kg	350
Max.lifting height	mm	280
Max. diameter	mm	600
Max.length	mm	915
Front wheel	mm	180*50
Loading wheel	mm	125*38
Overall length	mm	800
Overall width	mm	760
Overall height	mm	1250
Net weight	kg	42



HAND PALLET TRUCK
手动搬运车
SBA / SBD



Features:

- High balanced reinforced frame and pallet fork.
- Excellent quality forging & casting intergral pump which prevents any loosening and leakage
- High strength alloy steel carefully rafted, Incrrase loading apacity
- Oil pump with constant flow valve ensures balanced down of goods in heavy load









Model	Capacity (kg)	Fork width (mm)	Fork length (mm)	Single Fork Size Width*Thickness(mm)	Max. Lifting height (mm)	Lowered fork height (mm)	Loaded wheel (mm)	Material of wheel	N.W. (kg)	QTY/20'CY (PCS)
SBA	1000	510	910	160 x 60	180 / 170	85 / 75	180 x 50	80 x 93 single	65	180
SBA-I	2000/2500/3000	540/550/685	1100/1150/1220	160 x 60	195 / 185	85 / 75	180 x 50	80 x 93 single / 80 x 70 Double	65-75	180 / 144
SBD	2000/2500/3000	540/550/685	1100/1150/1220	160 x 60	195 / 185	85 / 75	180 x 50	80 x 93 single / 80 x 70 Double	65-75	180 / 144
SBD-I	5000	540/550/685	1100/1150/1220	160 x 65	195 / 185	85 / 75	180 x 50	80 x 70 Double	150-170	120 / 96



MANUAL STACKER
手动堆高车
SBC / SBD

Features:

- It applies C type steel structure design. Lifting more stable and safe.
- All manual stacker have been equipped with wheel frame protection device.
- The handle have been surround with rubber. With lengthening design for comfortable use.
- Single frame have two ways to unload by manual or pedal. More flexible to use.
- Fork with adjustable nut, it can easy to adjust the fork height.
- Wheel frame equipped with grease fitting design to routine maintenance the bearing.











MANUAL STACKER
手动堆高车
SBC / SBD





SBC 单门架系列 SINGLE FRAME SERIES

Model		SBC-500	SBC-1000	SBC-1500	SBC-2000
Power supply		Manual	Manual	Manual	Manual
Capacity	kg	500	1000	1500	2000
Max.lifting height	mm	1600	1600	1600	1600
Lowered fork height	mm	85	85	85	85
Fork length	mm	1000	1150	1150	1150
Fork width	mm	330-740	330-740	330-740	330-740
Front wheel	mm	Φ80*58	Φ80*58	Φ80*58	Φ80*58
Loaded wheel	mm	Φ180*50	Φ180*50	Φ180*50	Φ180*50
Overall dimension	mm	1600*760*2030	1600*760*2030	1600*760*2030	1600*760*2030
Leg dimension	mm	690	690	690	690
Net weight	kg	150	224	240	270

SBD 双门架系列 DOUBLE FRAME SERIES


Model		SBD-1000/1500/2000	SBD-1000/1500	SBD1000/1500
Power supply		Manual	Manual	Manual
Capacity	kg	1000/1500/2000	1000/1500	1000/1500
Max.lifting height	mm	2000	2500	3000
Lowered fork height	mm	85	85	85
Fork length	mm	1150	1150	1150
Fork width	mm	330-740	330-740	330-740
Front wheel	mm	Φ80*58	Φ80*58	Φ80*58
Loaded wheel	mm	Φ180*50	Φ180*50	Φ180*50
Overall dimension	mm	1600*760*1580	1600*760*1840	1600*760*2080
Leg dimension	mm	690	690	690
Net weight	kg	290	310	330



HAND WINCH
手动卷扬机

JC-C

Remarks: The rated capacity means the max. capacity when the winch to be winded the first layer of wire rope, and proportion decreased by adding numbers of layer of wire rope accordingly.

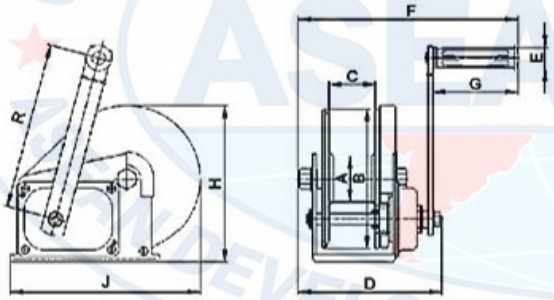



带钢丝绳，钩
with cable wire,hook



带尼龙绳，钩
with nylon rope,hook



不带绳，钩
no rope,hook



	Model	1200 lb	1800 lb	2600 lb
	Rated capacity (lb)	1200	1800	2600
	Test load (Kn)	8	12	17.5
	Transmission ratio	4.2:1	5:1	10:1
	Hand operated strength (N)	180	190	190
Dimensions (mm)	A	ф48	ф60	ф75
	B	ф134	ф180	ф180
	C	51	60	63
	D	157	190	209
	E	ф27	ф27	ф27
	F	273	288	307
	G	110	110	110
	H	156	203	216
	J	184	246	294
	R	208	319	319
	Net weight (no wire rope) (kg)	3.7	8.1	10.3


HAND WINCH
手动卷扬机

JC-B


(600 - 1400LBS)


(2000 - 2500LBS)


Remarks: The rated capacity means the max. capacity when the winch to be winded the first layer of wire rope, and proportion decreased by adding numbers of layer of wire rope accordingly.

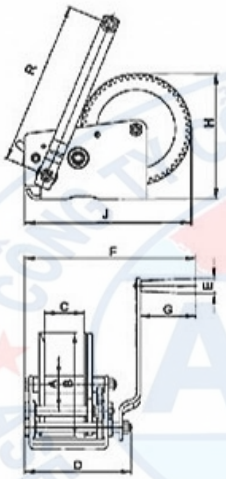

Model		600 lb	800 lb	1000 lb	1200 lb	1400 lb	2000 lb	2500 lb
Rated capacity (lb)		600	800	1000	1200	1400	2000	2500
Test load (Kn)		4.1	5.4	6.8	8.2	9.5	13.6	17
Single Speed / Double Speed		Single	Single	Single	Single	Single	Double	Double
Transmission ratio		2.9:1	3.7:1	4.2:1	4.2:1	4.2:1	10.35:1/4.5:1	11.5:1/5:1
Hand operated strength (N)		70	75	85	100	120	150	160
Dimensions (mm)	A	Φ21	Φ21	Φ21	Φ21	Φ21	Φ27	Φ27
	B	Φ116	Φ116	Φ135	Φ135	Φ135	Φ150	Φ165
	C	51	51	51	51	51	65	65
	D	119	119	119	119	119	174	174
	E	Φ25	Φ25	Φ25	Φ25	Φ25	Φ25	Φ25
	F	228	228	228	228	228	281	281
	G	91	91	91	91	91	91	91
	H	138	138	156	156	156	182	191
	J	165	165	184	184	184	250	256
	R	180	180	180	180	180	251	251
Net weight(no wire rope) (kg)		2.4	2.5	2.8	2.8	2.8	5.9	6.4

HAND WINCH
手动卷扬机

JC-E

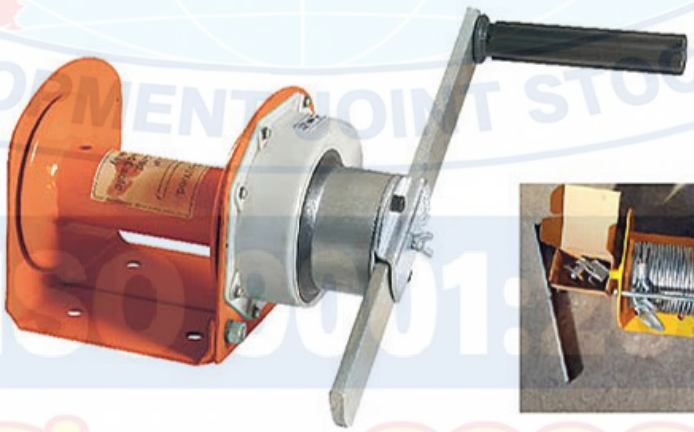


HEAVY DUTY



JC-E 手动卷扬机 HAND WINCH

Model		0.1 t	0.3 t	0.5 t	1 t	2 t	3 t
Safe Working Load (t)		0.1	0.3	0.5	1	2	3
Test load (Kn)		1.225	3.675	6.125	12.25	24.5	36.75
Adopted Wire Rope dia x length (mm)		Φ5x30	Φ6.3x30	Φ6.3x40	Φ8x40	Φ9x40	Φ12.5x40
Speed Ratio		1:1	2.88:1	4.33:1	12.19:1	22.68:1	29.16:1
The Max. Length of Link-pole action (mm)		240	350	350	350	350	350
Min. Force of Hand Turn (N)		115	110	120	120	130	180
Dimensions (mm)	A	Φ48	Φ60	Φ60	Φ76	Φ90	Φ100
	B	Φ110	Φ125	Φ140	Φ175	Φ190	Φ230
	C	116	150	150	154	195	205
	D	80	100	100	110	155	155
	E	Φ11	Φ15	Φ15	Φ18	Φ18	Φ18
	F	402	403	403	443	490	549
	H	147	174	182	214	230	296
	I	90	130	130	170	170	170
	J	160	220	245	266	300	365
Net weight(no wire rope) (kg)		6.9	11.8	14.4	19.7	25.1	44.3

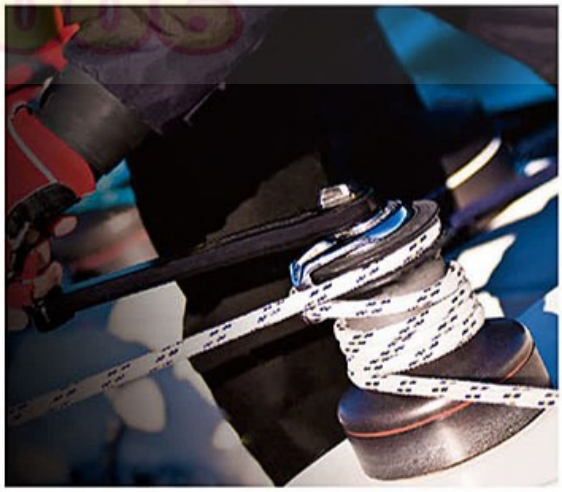

HAND WINCH
手动卷扬机


HWG
HWV

FEATURES:
- Encased mechanical parts
- Automatic brake
- Adjstable and dismountable crank
- 2 securing planes horizontal or vertical (according to model)
- Can be unclutched when off-load, whilst impossible to unclutch under load
- Highly rugged design, thanks to the exceptional rigidity of the frame

HAND WINCH FOR USING:
Upgrade, a wire transfer, loading and unloading heavy objects, etc.

HWV




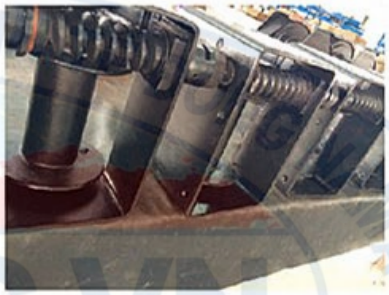



HWG





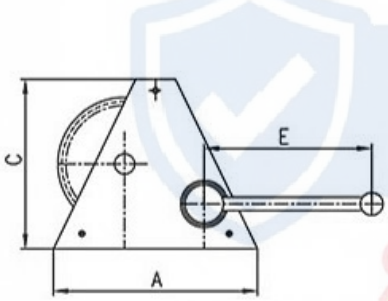



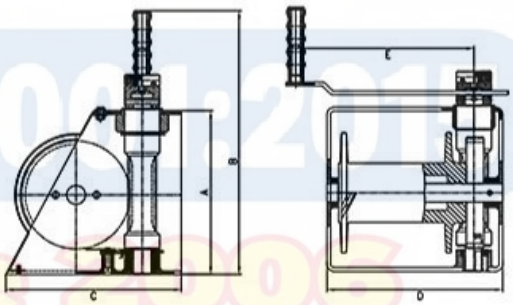

HWG 手动卷扬机 HWG HAND WINCH

Model	GR150	GR300	GR500	GR1000	GR2000
S.W.L(kg)	150	300	500	1000	2000
For wire rope(mm)	4	5	6.3	9.3	13
Length(m)	22	40	20	35	30
Number of layers	6	6	4	4	4
N.W(kg)	5.5	16.9	18.8	38	68.4
A(mm)	180	240	240	412	500
B(mm)	325	385	385	485	585
C(mm)	150	200	200	300	325
D(mm)	150	200	200	300	405
E(mm)	350	250	250	350	350
Φx(mm)	4x22	5x40	6.8x20	9x35	13x30
Drive ratio	2.84:1	6.67:1	7.75:1	23.75:1	43.7:1
4xΦ	4xΦ9	4xΦ13	4xΦ13	4xΦ17	4xΦ21

HWV 手动卷扬机 HWG HAND WINCH

Model	VS250	VS500	VS1000	VS2000
S.W.L(kg)	250	500	1000	2000
For wire rope(mm)	5	6.3	9.3	13
Length(m)	20	25	35	30
Number of layers	4	4	4	4
N.W(kg)	10	17	30.5	70
A(mm)	150	180	300	340
B(mm)	330	360	490	534
C(mm)	150	180	300	340
D(mm)	200	260	300	395
E(mm)	240	240	350	380
Φx(m)	5x20	6.8x25	9x35	13x30
Drive ratio	15：1	21：1	26：1	86.67：1
4xΦ	4xΦ11	4xΦ13	4xΦ17	4xΦ22

CRANE SCALE
电子秤

OCS-XZ
OCS-FZ

DESCRIPTION:
The crane scales offer fast and reliable weighing in a compact and durable housing. Designed to withstand the most aggressive and heavy duty industrial lifting applications.




OCS-FZ




OCS-XZ






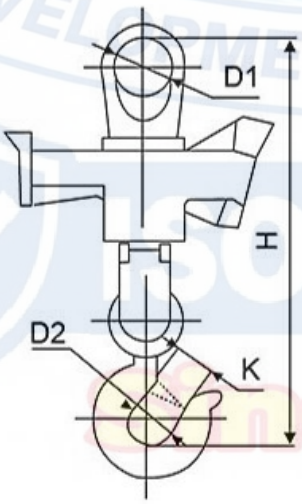



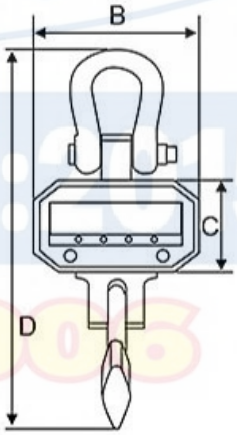

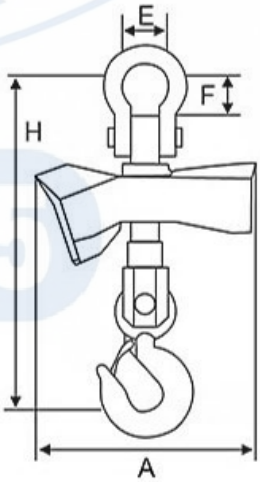

OCS-XZ 电子称 ALUMINIUM CRANE SCALE

MODEL	CAPACITY (Ton)	DIVISION (kg)	WEIGHT (kg)	H (mm)	K (mm)	D1 (mm)	D2 (mm)
OCS-XZ-0.5	0.5	0.2	17	422	27	65	36
OCS-XZ-1	1	0.5	17	422	27	65	36
OCS-XZ-2	2	1	18	477	31	65	50
OCS-XZ-3	3	1	18	477	31	65	50
OCS-XZ-5	5	2	23	572	48	80	60
OCS-XZ-10	10	5	37	672	57	100	70
OCS-XZ-15	15	5	78	895	73	150	90
OCS-XZ-20	20	10	78	895	73	150	90
OCS-XZ-30	30	10	146	1075	102	150	120

OCS-FZ 电子称 STEEL CRANE SCALE

MODEL	CAPACITY (Ton)	DIVISION (kg)	WEIGHT (kg)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
OCS-FZ-1t	1	1	13	250	210	110	509	55	95	40	436
OCS-FZ-2t	2	1	13	250	210	110	509	55	95	40	436
OCS-FZ-3t	3	1	13	250	210	110	509	55	95	40	436
OCS-FZ-5t	5	2	16	250	210	110	588	77	125	45	518
OCS-FZ-10t	10	5	22	250	210	110	650	90	130	50	550
OCS-FZ-15t	15	5	40	270	230	160	960	100	165	60	850
OCS-FZ-20t	20	10	65	270	230	160	1103	130	190	80	980
OCS-FZ-30t	30	10	98	270	230	160	1290	140	300	110	1200

LIFTING CLAMP








ISO 9001:2015
Since 2006

VERTICAL PLATE CLAMP
钢板吊


DSQK

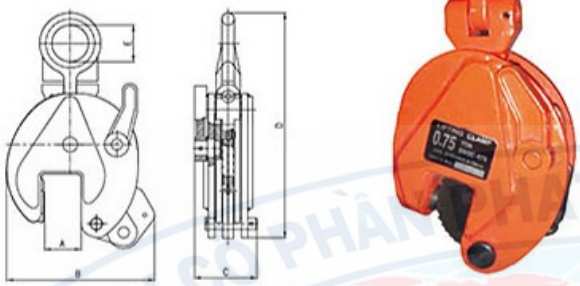

Model	DSQK-0.8	DSQK-1.6	DSQK-3	DSQK-4.5	DSQK-5
Rated capacity(T)	0.8	1.6	3	4.5	5
Test load	1.6	3.2	6	9	10
Jaw opening(mm)	15-30	20-40	25-50	25-50	36-60
Net Weight(kg)	2	7	15	15	23

VERTICAL PLATE CLAMP
钢板吊

DSQA

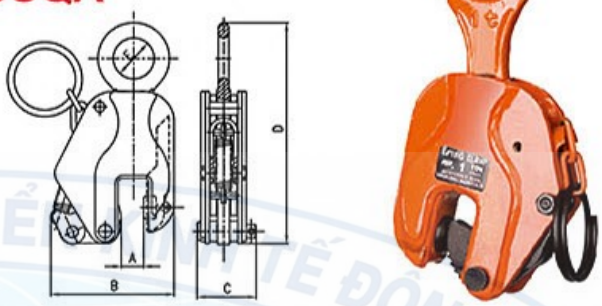


Model	DSQA-0.8	DSQA-1	DSQA-2	DSQA-3	DSQA-5	DSQA-8	DSQA-10	DSQA-12	DSQA-16
Rated capacity(T)	0.8	1.0	2.0	3.0	5.0	8.0	10.0	12.0	16.0
Test load	1.6	2.0	4.0	6.0	10.0	16.0	20.0	24.0	32.0
Jaw opening(mm)	0-16	0-22	0-30	0-40	0-50	0-60	0-80	25-90	60-125
Net Weight(kg)	2.8	3.6	5.5	10	17	26	32	48	80

UNIVERSAL PLATE CLAMP
钢板吊

DSQC



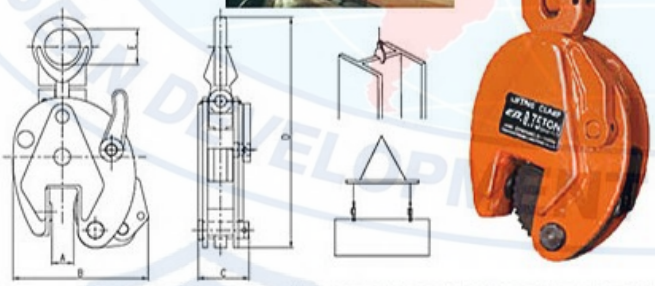


Model	DSQC-0.8	DSQC-1	DSQC-1(B)	DSQC-1.6	DSQC-2	DSQC-3	DSQC-3(B)	DSQC-5	DSQC-5(B)	DSQC-8	DSQC-12	DSQC-16
Rated capacity(T)	0.8	1.0	1.0	1.6	2.0	3.0	3.0	5.0	5.0	8.0	12.0	16.0
Test load	1.6	2.0	2.0	3.2	4.0	6.0	6.0	10.0	10.0	16.0	24.0	32.0
Jaw opening(mm)	0-15	0-15	0-20	0-20	0-25	0-25	0-30	0-30	0-50	0-45	50-90	60-100
Net Weight(kg)	2	4	5	7	8	15	15	21	23	37	50	65

ROUND STOCK GRABS
钢板吊

DGP




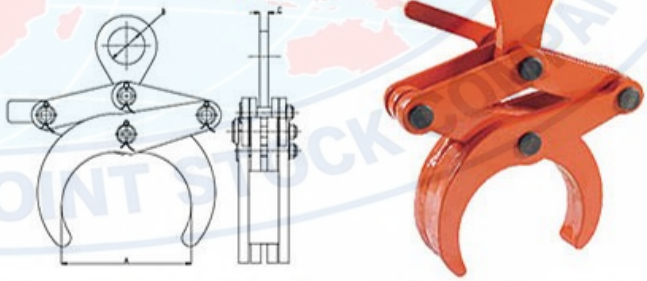

Model	DGP-0.5	DGP-1	DGP-2	DGP-3	DGP-5
Rated capacity(T)	0.5	1	2	3	5
Test load	1	2	4	6	10
Jaw opening(mm)	50-100	50-100	80-130	120-220	200-320
Net Weight(kg)	3.2	4.1	16	32	104

PIPE PLATE CLAMP
钢板吊


DHP

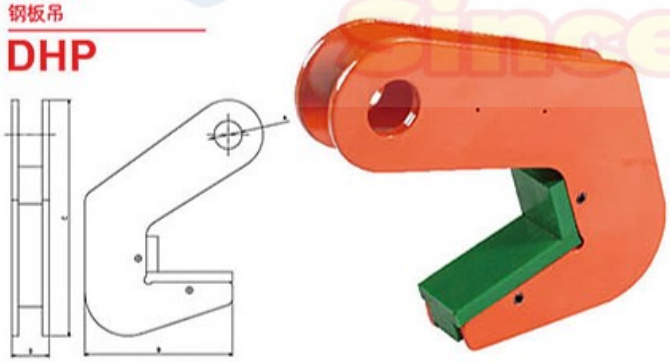

Model	DHP-1.5	DHP-3	DHP-4	DHP-6	DHP-8	DHP-12	DHP-16	DHP-18
Rated capacity(T)	1.5	3	4	6	8	12	16	18
Test load	3	6	8	12	16	24	32	36
Jaw opening(mm)	40	40	50	50	70	70	70	70
Net Weight(kg)	1.5	2	2.8	3.2	3.6	9	11	13

DOUBLE STEEL PLATE CLAMP
钢板吊


DHQS

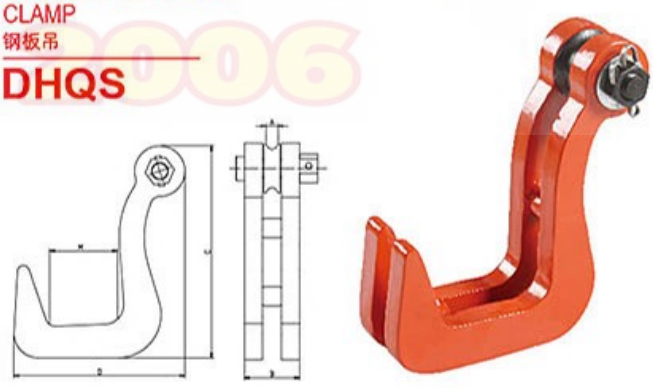


Model	DHQS-1	DHQS-2	DHQS-3	DHQS-5	DHQS-7
Rated capacity(T)	1	2	3	5	7
Test load	2	4	6	10	14
Jaw opening(mm)	0-40	0-50	0-60	0-70	0-90
Net Weight(kg)	2	3.5	6	14.5	22


HORIZONTAL PLATE CLAMP
钢板吊

DHQ












Model	DHQ-0.8	DHQ-1	DHQ-1.6	DHQ-2	DHQ-3	DHQ-4	DHQ-5	DHQ-6	DHQ-6(B)	DHQ-8	DHQ-10
Rated capacity(T)	0.8	1.0	1.6	2.0	3.0	4.0	5.0	6.0	6.0	8.0	10.0
Test load	1.6	2.0	3.2	4.0	6.0	8.0	10.0	12.0	12.0	16.0	20.0
Jaw opening(mm)	0-25	0-30	0-30	0-40	0-45	0-50	0-55	0-65	0-130	0-100	0-125
Net Weight(kg)	2.5	3.5	4.0	5.0	6.0	6.5	7.5	10.5	22.0	22.0	33.0

HORIZONTAL PLATE CLAMP
钢板吊

DHQA






Model	DHQA-1	DHQA-2	DHQA-3	DHQA-5	DHQA-6	DHQA-10
Rated capacity(T)	1	2	3	5	6	10
Test load	2	4	6	10	12	20
Jaw opening(mm)	0-30	0-50	0-60	10-80	10-100	20-120
Net Weight(kg)	4	5.5	8	11.5	14.5	30

HORIZONTAL PLATE CLAMP
钢板吊

DHQL







Model	DHQL-0.8	DHQL-1	DHQL-1.6	DHQL-2.5	DHQL-2.5(B)	DHQL-3	DHQL-3(B)	DHQL-5	DHQL-5(B)
Rated capacity(T)	0.8	1.0	1.6	2.5	2.5	3.0	3.0	5.0	5.0
Test load	1.6	2.0	3.2	5.0	5.0	6.0	6.0	10.0	10.0
Jaw opening(mm)	0-15	0-20	0-25	0-30	25-50	0-40	30-60	0-50	50-80
Net Weight(kg)	2	4	6.5	11	11	12.5	12.5	19	20

MULTI PLATE CLAMP
钢板吊

DHQK










Model	DHQK-3	DHQK-4.5	DHQK-6	DHQK-8	DHQK-15
Rated capacity(T)	3	4.5	6	8	15
Test load	6	9	12	16	30
Jaw opening(mm)	0-180	0-240	0-240	0-240	0-240
Net Weight(kg)	19	26	40	51	72

HORIZONTAL PLATE CLAMP
钢板吊

DHQP





Model	DHQP-1.5	DHQP-3	DHQP-5
Rated capacity(T)	1.5	3	5
Test load	3	6	10
Jaw opening(mm)	0-50	0-50	0-60
Net Weight(kg)	4.3	6	12





HORIZONTAL PLATE CLAMP
钢板吊


TMS



Model	TMS0.5T	TMS1T	TMS2T	TMS3T	TMS5T
Jaw Opening(mm)	0-25	0-25	0-30	0-38	0-40
Load Capacity(kg)	500	1000	2000	3000	5000
T(mm)	235	262	260	315	380
U(mm)	122	155	177	209	261
V(mm)	54	60	72	88	104
L(mm)	44	50	56	58	60
N.W.(kg)	3	5	7.2	10	26.8

STRUCTURE CLAMP
钢板吊

DHC

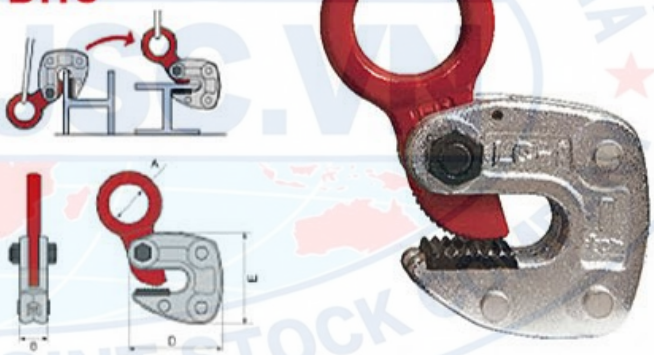

Model	DHC1T	DHC2T	DHC3T
Jaw Opening(mm)	1-13	3-22	12-35
Load Capacity(kg)	1000	2000	3000
A(mm)	45	58	42
B(mm)	31	42	52
D(mm)	108	145	180
E(mm)	105	135	175
Weight(kg)	2	4.5	8.9

CONCRETE PIPE LIFTING CLAMP
水泥管吊

DHG





Model	DHG15003	DHG30003	DHG6000/3
WLL kgs	1500	3000	3000
Jaw(Z) Opening(mm)	40-120	50-180	90-220
Mouth Depth(E)(mm)	165	245	245
Pressure Line(F)(mm)	100	175	175
A(mm)	135	180	180
B(mm)	75	100	100
C(mm)	18	26	26
D(mm)	180	310	310
Weight(kg)	48	60	78

RALL CLAMP
钢板吊

RC





Model	RC2T	RC4T
Jaw Opening(mm)	15-85	10-95
Load Capacity(kg)	2000	4000
Gmax(mm)	108	155
Hmax(mm)	302	410
D(mm)	60	76
W(mm)	58	70
Weight(kg)	6.2	15

LH hook





LS shackle

SNATCH BLOCK
重力滑车

LS / LH

Heavy-duty snatch block withstands the abuse of regular towing. Quick-pull pin enables easy cable loading.




HEAVY DUTY






LH TYPES
HEAVY DUTY SNATCH BLOCKS

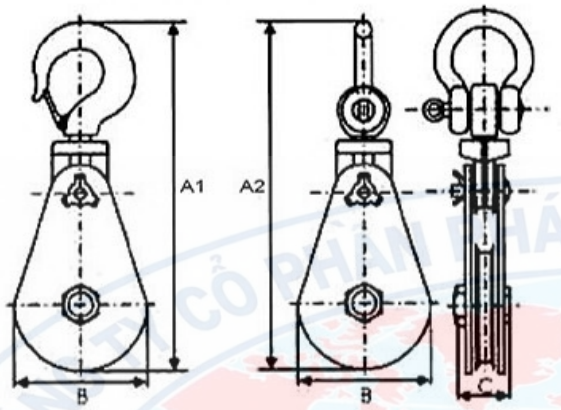

- Capacity form 2t to 85t
- Durable powder coat finish
- Shackle type and hook type are available
- Heavy-duty permits to perform under extreme condition
- Forged spare parts enhance the quality

LS TYPES
HEAVY DUTY SNATCH BLOCKS

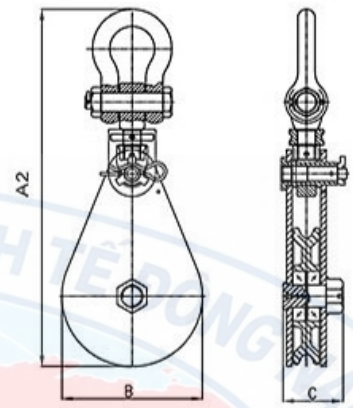


LH 吊钩型强力重型滑车 HEAVY DUTY SNATCH BLOCKS

TYPE HOOK	S.W.L (T)	SHEAVE DIA (mm)	A1 (mm)	B (mm)	C (mm)	FOR WIRE DIA (mm)	N.W. (kg)
LH3"X1	2	75	292	82	70	7-9	3.9
LH4(1/2)"X1	4	115	358	120	70	10-12	6.2
LH6"X1	4	150	412	160	70	16-18	8.4
LH6"X1	8	150	498	160	93	20-22	14.1
LH8"X1	8	200	549	210	93	20-22	19
LH8"X1	15	200	672	230	102	22-24	34
LH10"X1	10	250	695	260	115	24-26	36
LH10"X1	12	250	701	260	115	24-26	36
LH12"X1	12	300	797	310	133	24-26	56
LH12"X1	15	300	800	310	133	24-26	58
LH14"X1	22	355	960	365	140	28-32	112
LH16"X1	22	400	1027	415	140	28-32	122
LH16"X1	30	400	1085	415	155	32-35	170
LH20"X1	30	500	1177	514	162	32-35	213
LH24"X1	50	600	1445	625	240	46-50	408
LH30"x1	85	760	1960	800	288	56-64	810

LS 卸扣型强力重型滑车 HEAVY DUTY SNATCH BLOCKS

TYPE SHACKLE	S.W.L (t)	SHEAVE DIA (mm)	A2 (mm)	B (mm)	C (mm)	FOR WIRE DIA (mm)	N.W. (kg)
LS3"X1	2	75	286	82	70	7-9	3.8
LS4(1/2)"X1	4	115	345	120	70	10-12	6.2
LS6"X1	4	150	399	160	70	16-18	8.3
LS6"X1	8	150	475	160	93	20-22	14.1
LS8"X1	8	200	528	210	93	20-22	18.7
LS8"X1	15	200	663	210	102	22-24	33
LS10"X1	10	250	679	260	115	24-26	34.7
LS10"X1	12	250	679	260	115	24-26	34.7
LS12"X1	12	300	767	310	133	24-26	54
LS12"X1	15	300	788	310	133	24-26	55
LS14"X1	22	355	952	365	140	28-32	109
LS16"X1	22	400	1019	415	140	28-32	118
LS16"X1	30	400	1126	415	155	32-35	164
LS20"X1	30	500	1256	514	162	32-35	208
LS24"X1	50	600	1525	625	240	46-50	418
LS30"x1	85	760	1910	800	288	56-64	840

CÔNG TY CỔ PHẦN PHÁT TRIỂN KINH TẾ ĐÔNG NAM Á
ASEAN JSC.VN
ISO 9001:2015
Since 2006

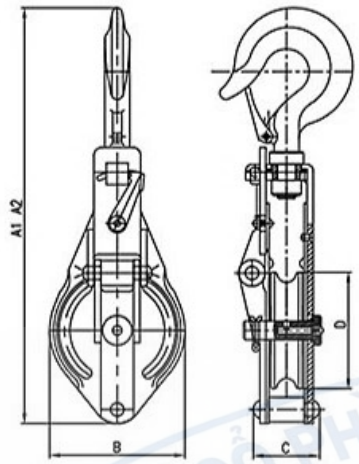


SINGLE SHEAVE SNATCH BLOCKS



SINGLE SHEAVE SNATCH BLOCKS
单轮绞接式滑车
DY



TYPE		S.W.L	SHEAVE DIA	DIMENSIONS (mm)				FOR WIRE DIA	N.W.
HOOK	EYE	(t)	D (mm)	HOOK A1	EYE A2	B	C	(mm)	(kg)
75DYx1S	75DYx1SO	0.5	75	286	227	87	50	8	1.6
100DYx1S	100DYx1SO	1	100	311.5	284.5	112	55.5	10	3.5
125DYx1S	125DYx1SO	1.5	125	370	344	140	63.5	13	4.6
150DYx1S	150DYx1SO	2	150	442.5	417	168	101	16	7.7
180DYx1S	180DYx1SO	3	180	498	478	204	107	19	11
200DYx1S	200DYx1SO	4	200	590.5	556	226	128	22	19.3
250DYx1S	250DYx1SO	5	250	590.5	651	276	147	25	33.8
300DYx1S	300DYx1SO	6	300	795	775	330	162	26	48
350DYx1S	350DYx1SO	10	350	934	898	395	178	28	66

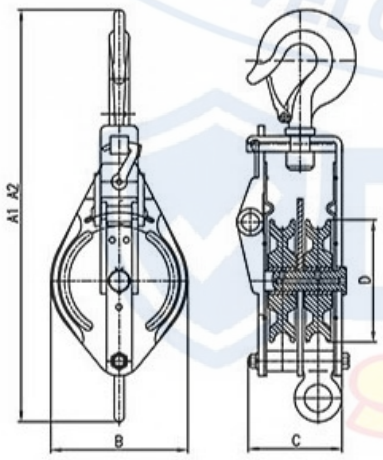

DOUBLE SHEAVE SNATCH BLOCKS



Description:

Trawl block is an easy to use, versatile, manual lifting equipment, are used in factories, mines, agriculture, production of electricity, building construction, dock ships, warehouses, machine installation, cargo lifting, and so on.



DOUBLE SHEAVE SNATCH BLOCKS
双轮绞接式滑车
DY




TYPE		S.W.L	SHEAVE DIA	DIMENSIONS (mm)				FOR WIRE DIA	N.W.
HOOK	EYE	(t)	D (mm)	HOOK A1	EYE A2	B	C	(mm)	(kg)
75DYx2S	75DYx2SO	0.5	75	286	227	87	77	8	2.8
100DYx2S	100DYx2SO	1	100	311.5	284.5	112	88	10	4.3
125DYx2S	125DYx2SO	1.5	125	370	344	140	100	13	7.8
150DYx2S	150DYx2SO	2	150	442.5	417	168	146	16	12.2
180DYx2S	180DYx2SO	3	180	498	478	204	157	19	18.5
200DYx2S	200DYx2SO	4	200	590.5	556	226	188	22	31
250DYx2S	250DYx2SO	5	250	706.5	651	276	220	25	49.8
300DYx2S	300DYx2SO	6	300	795	775	330	238	26	72
350DYx2S	350DYx2SO	10	350	934	898	395	260	28	102




WIRE ROPE SNATCH BLOCKS
强力钢索麻索滑车



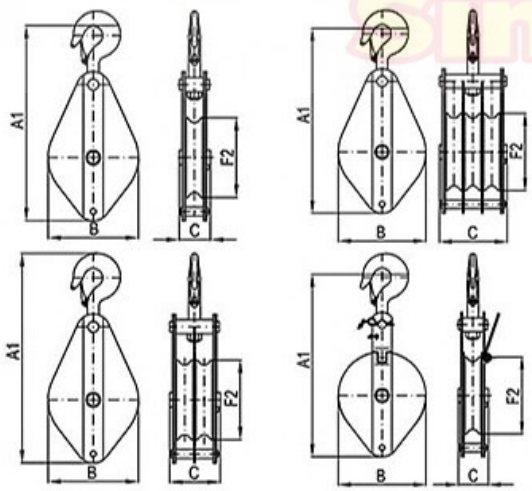

TYPE 吊钩型HOOK	TYPE 吊环型EYE	S.W.L (t)	SHEAVE DIA F2 (mm)	DIMENSIONS (mm) HOOK A1	EYE A2	B	C	WIRE ROPE DIA (mm)	M.D. (mm)
1B-63H	1B-63E	0.25	63	208.4	202.4	68	40	5	10
1B-75H	1B-75E	0.25	75	222.4	216.4	80	40	6	12
1B-100H	1B-100E	0.5	100	300.5	283.5	108	48.5	8	16
1B-125H	1B-125E	1	125	346	332.5	140	53.5	10	20
1B-150H	1B-150E	1	150	392	378.5	168	60	12	24
1B-180H	1B-180E	1.5	180	456.7	450	204	81	15	30
1B-200H	1B-200E	2	200	505.8	488	220	91.5	16	32
1B-250H	1B-250E	3	250	642.7	627	268	114	20	40
2B-63H	2B-63E	0.25	63	208.4	202.4	68	63	5	10
2B-75H	2B-75E	0.25	75	222.4	216.4	80	63	6	12
2B-100H	2B-100E	0.75	100	315.4	285	108	76	8	16
2B-125H	2B-125E	1	125	346	332.5	140	86	10	20
2B-150H	2B-150E	1.5	150	412.7	400	168	95	12	24
2B-180H	2B-180E	2	180	469.8	452	204	125	15	30
2B-200H	2B-200E	3	200	522.8	504	220	144	16	32
2B-250H	2B-250E	4	250	653	650	268	183	20	40
3B-63H	3B-63E	0.25	63	208.4	202.4	68	87	5	10
3B-75H	3B-75E	0.25	75	222.4	216.4	80	87	6	12
3B-100H	3B-100E	0.75	100	315.9	285	108	104	8	16
3B-125H	3B-125E	1	125	346	332.5	140	119	10	20
3B-150H	3B-150E	1.5	150	412.7	400	168	130	12	24
3B-180H	3B-180E	2	180	469.8	452	204	169	15	30
3B-200H	3B-200E	4	200	545.2	529.5	220	196	16	32
3B-250H	3B-250E	5	250	688.5	671	268	253	20	40
1S-63H	1S-63E	0.25	63	208.4	202.4	68	40	5	10
1S-75H	1S-75E	0.25	75	222.4	216.4	80	40	6	12
1S-100H	1S-100E	0.5	100	300.5	283.5	108	58.5	8	16
1S-125H	1S-125E	1	125	361	347.5	140	62.5	10	20
1S-150H	1S-150E	1	150	392	378.5	168	70	12	24
1S-180H	1S-180E	1.5	180	456.7	450	204	81	15	30
1S-200H	1S-200E	2	200	505.8	488	220	91.5	16	32
1S-250H	1S-250E	3.5	250	642.7	627	268	114	20	40

SNATCH BLOCK
重 力 滑 车

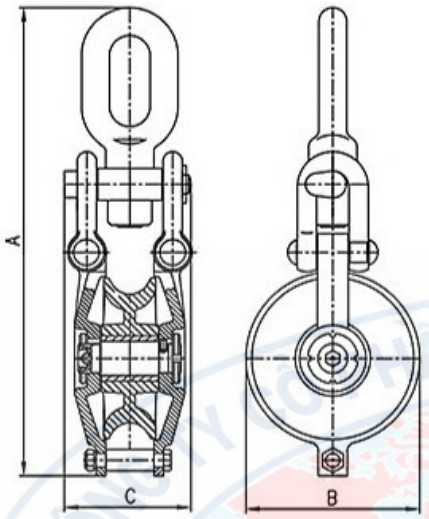






SINGLE MARINE SNATCH GUIDE BLOCKS
单轮船用开口导向滑车
HC

TYPE	DHC3x1KBL	DHC5x1KBL
S.W.L KN(t)	30 (3)	50 (5)
T.L KN(t)	90 (9)	150 (15)
DIMENSIONS (mm) A	413	437
B	140	162
C	84	89
N.W. (kg)	10	12
FOR WIRE DIA (mm)	18-20	20-22

TYPE	S.W.L KN(t)	T.L KN(t)	FOR WIRE DIA (mm)	A (mm)				B	C	D	N.W. (kg)			
				L type	N type	Y type	Q type				L type	N type	Y type	Q type
6-HC 2x1	20 (2)	80 (8)	10-13	429	384	384	401	156	132	100	11	11	11	12.5
8-HC 3x1	30 (3)	120 (12)	16-20	568	482	482	501	196	164	124	20	20	20	22
10-HC 3x1	30 (3)	120 (12)	16-20	606	551	551	570	260	224	124	27	27	27	30
12-HC 5x1	50 (5)	200 (20)	20-22	685	643	643	658	300	260	134	40	40	41	46
14-HC 5x1	50 (5)	200 (20)	20-24	796	737	737	750	340	300	151	55	55	55	59
16-HC 10x1	100 (10)	400 (40)	24-26	945	881	881	897	406	356	190	100	100	102	110
17-HC 16x1	160 (16)	640 (64)	26-28	1018	948	948	968	430	378	192	125	125	128	132
18-HC 20x1	200 (20)	800 (80)	26-28	1095	1035	1035	1055	460	410	210	150	150	155	172

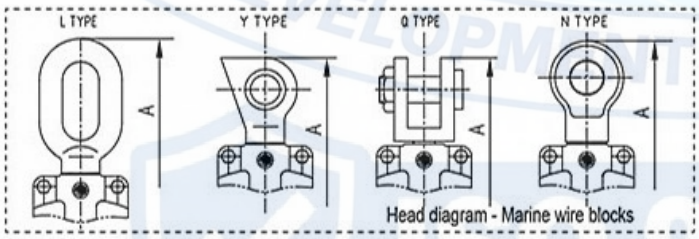

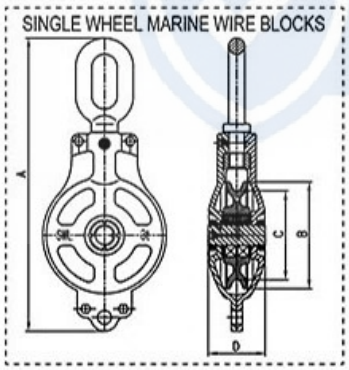

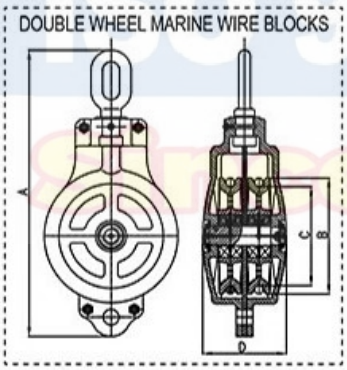



DOUBLE WHEEL MARINE WIRE BLOCKS
双轮船用钢索滑车
DHC


TYPE	S.W.L KN(t)	T.L KN(t)	FOR WIRE DIA (mm)	A (mm)				B	C	D	N.W. (kg)			
				L type	N type	Y type	Q type				L type	N type	Y type	Q type
8-HC 5x2	50 (5)	100 (10)	16-20	562	498	498	517	194	164	166	30	30	30.5	32
10-HC 8x2	80 (8)	160 (16)	16-20	642	600	600	615	260	224	180	50	51	51	55
12-HC 10x2	100 (10)	200 (20)	20-22	730	680	680	688	300	260	205	70	70	70	74
14-HC 16x2	160 (16)	320 (32)	20-24	840	773	773	790	340	295	250	110	111	112	118
16-HC 20x2	200 (20)	400 (40)	24-26	1035	945	945	913	406	356	271	140	143	143	157
17-HC 25x2	250 (25)	500 (50)	26-28	1074	1010	1010	1035	430	378	308	180	182	185	205
18-HC 32x2	320 (32)	640 (64)	26-28	1174	1090	1090	1120	460	410	308	227	230	232	260

WIRE BLOCKS
钢索滑车
YB / YBO


Description:

This block structure is simple, easy to use, can be repeatedly changed pulley and pulley traction cables running and lifting or moving objects in the direction of, especially by joint pulley the pulley, with the winch, mast or other lifting appliances, lifting tackle is widely used in construction and installation operations. Mainly used in factories, mines, agriculture, electricity, construction and other construction, dock, dock, warehouse machines installed, cargo lifting, and so on.



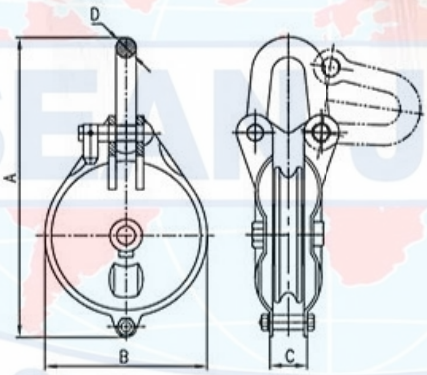



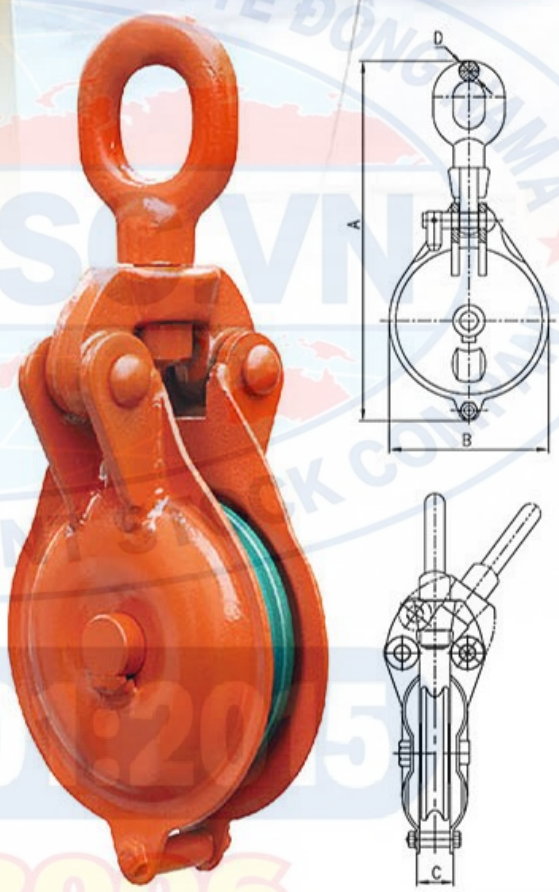

YB 船用卸扣钢索滑车 MARINE SHACKLE WIRE BLOCKS

TYPE	SHEAVE DIA (mm)	S.W.L (t)	DIMENSIONS (mm) A	B	C	D	N.W. (kg)	FOR WIRE DIA (mm)
YB75x1	75	0.5	178	85	26	12	1.1	8
YB100x1	100	1	235	121	34	16	1.8	8
YB125x1	125	1.5	305	145	38	18	3.5	9
YB150x1	150	2	350	180	41	22	5.1	12
YB200x1	200	4	425	225	46	28	11.5	16
YB250x1	250	5	495	275	60	28	17	22
YB75x2	75	0.5	178	85	50	12	1.8	8
YB100x2	100	1	235	121	61	16	2.8	8
YB125x2	125	1.5	305	145	73	18	5.5	9
YB150x2	150	2	350	180	83	22	8.5	12
YB200x2	200	4	425	225	93	28	16.5	16
YB250x2	250	5	495	275	115	28	25.5	22

YBO 船用吊环钢索滑车 MARINE EYE WIRE BLOCKS

TYPE	SHEAVE DIA (mm)	S.W.L (t)	DIMENSIONS (mm) A	B	C	D	N.W. (kg)	FOR WIRE DIA (mm)
YBO75x1	75	0.5	230	85	26	12	1.5	8
YBO100x1	100	1	285	121	34	16	2.4	8
YBO125x1	125	1.5	346	145	38	18	4.2	9
YBO150x1	150	2	419	180	41	22	6.4	12
YBO200x1	200	4	517	225	46	28	12.5	16
YBO250x1	250	5	655	275	60	28	16	22
YBO75x2	75	0.5	230	85	50	12	2.1	8
YBO100x2	100	1	285	121	61	16	3	8
YBO125x2	125	1.5	355	145	73	18	5.9	9
YBO150x2	150	2	365	180	83	22	9	12
YBO200x2	200	4	517	225	93	28	17.5	16
YBO250x2	250	5	600	275	115	28	28.6	22



LIFTING CHAIN
起重链条

G-80





G-80 起重链条 LIFTING CHAIN (EN818-2, DIN5687-80)

SIZE (mm)	DEVIATION (mm)	PITCH (mm)	DEVIATION MAX.	DEVIATION MIN.	INSIDE WIDTH (mm)	OUTSIDE WIDTH (mm)	WEIGHT (kg/m)	WORKING LOAD (kn)	PROOF LOAD (kn)	BREAK LOAD (kn)
6	±0.24	18.00	18.50	17.50	7.80	22.20	0.80	11.20	28.30	45.20
7	±0.28	21.00	21.80	20.40	9.10	25.90	1.10	15.00	38.50	61.60
8	±0.32	24.00	24.70	23.30	10.40	29.60	1.40	20.00	60.30	80.40
10	±0.40	30.00	30.90	29.10	13.00	37.00	2.20	31.50	78.50	126.00
13	±0.52	39.00	40.20	37.80	16.90	48.10	3.80	53.00	133.00	212.00
16	±0.64	48.00	49.40	49.60	20.80	59.20	5.70	80.00	201.00	322.00
18	±0.90	54.00	55.60	52.40	23.40	66.60	7.30	100.00	254.00	407.00
20	±1.00	60.00	61.80	58.20	26.00	74.00	9.00	125.00	314.00	503.00
22	±1.10	66.00	68.00	64.00	28.60	81.40	10.90	150.00	380.00	608.00
26	±1.3	92.00	92.30	91.70	33.80	96.20	15.20	212.00	531.00	849.00
32	±1.8	96.00	99.00	93.00	46.00	116.00	22.00	321.00	643.00	1285.00





LIFTING CHAIN
起重链条


G-100




25%
STRONGER
THAN G80 CHAIN

G-100 起重链条
G100 LIFTING CHAIN (EN818-2,DIN5687-100)

Size (mm)	Deviation (mm)	Pitch (mm)	Inside width (mm)	Outside width (mm)	Weight (kg/m)	Working load (KN)	Proof load (KN)	Break load (KN)
6	±0.24	18.00	7.80	22.20	0.80	14.00	35.00	56.00
8	±0.32	24.00	10.40	29.60	1.50	25.00	62.00	100.00
10	±0.40	30.00	13.00	37.00	2.40	39.00	98.00	157.00
13	±0.52	39.00	16.90	48.10	4.00	66.00	165.00	265.00
16	±0.64	48.00	20.80	59.20	6.00	100.00	251.00	402.00
18	±0.90	54.00	23.40	66.60	7.50	127.00	317.00	508.00
20	±1.00	60.00	26.00	74.00	9.30	157.00	392.00	628.00
22	±1.10	66.00	28.60	81.40	11.00	190.00	475.00	760.00

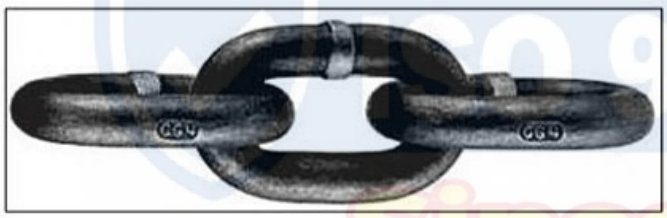

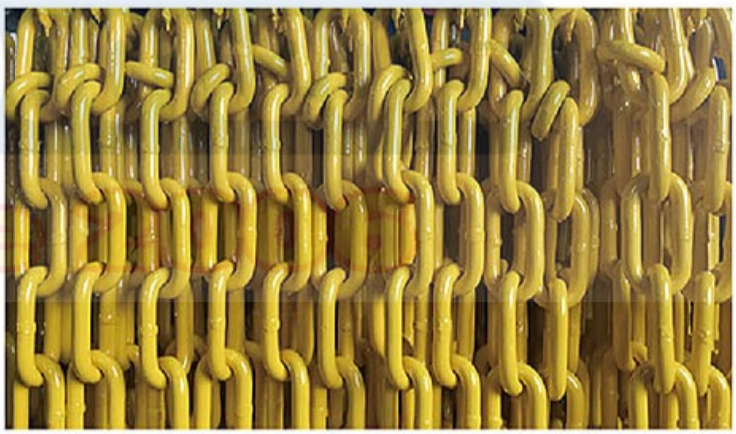


FISHING CHAIN
起重链条

KINDS	SHORT LINK CHAIN						MID LINK CHAIN							LONG LINK CHAIN							
DIA.(MM)	7	10	13	16	19	20	10	13	14	16	19	22	26	7	9	11	13	16	19	22	28
DIA. PITCH(MM)	21	30	39	48	57	60	40	52	50	64	76	86	92	45	57	63	80	100	100	120	150
INSIDE WIDTH(MM)	10.0	14.0	18.1	22.4	27.8	29.0	15.0	19.5	18.5	24.0	28.5	27.0	31.0	10.0	15.0	18.0	22.0	26.0	27.0	320.0	44.0
OUTSIDE WIDTH(MM)	25.5	36.0	47.1	57.4	68.8	72.0	37.0	48.5	49.5	59.0	69.5	74.0	86.0	25.5	35.0	43.0	51.0	61.0	68.0	84.0	103.0
WEIGHT(KG/M)	1.1	2.2	3.8	5.6	8.0	8.9	2.0	3.3	4.0	5.1	7.2	9.4	13.6	0.8	1.4	2.2	2.9	4.4	6.5	8.7	14.3
BREAKING LOAD(KN)	60.5	125.0	212.0	320.0	450.0	510.0	125.0	212.0	246.0	320.0	450.0	610.0	849.0	60.5	102.0	151.0	212.0	320.0	450.0	610.0	984.0

FORGED MASTER LINK
美标80级锻造强力环

SLR091-G80



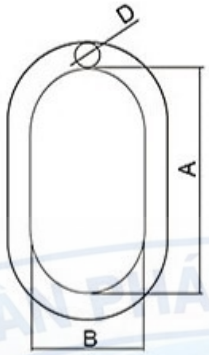

Introduction:


Forged master link are mainly used in electric power, metallurgy, petroleum, chemical, machinery, railway, ports, mining, construction and other businesses on the lifting and hoisting, or chain, wire rope, double buckles, hooks, and other accessories Sling.



Item No.	Weight (kg)	Chain 80	WII 1 Leg (T)	WII 2 Leg -45° (T)	WII Rope (T)	DIMENSIONS (mm) A	B	D
8-SLR-91-1/2	0.36	1/4	1.5	2.12	3.4	127±6	63.5±5	13±1
		5/16	2	2.8				
8-SLR-91-5/8	0.7	5/16	2	2.8	4	152±6	76±5	16±1
		3/8	3.15	/				
8-SLR-91-3/4	0.93	3/8	3.15	4.25	5.6	140±6	70±5	19±1
8-SLR-91-7/8	1.5	3/8	3.15	4.25	6.9	160±6	90±5	22±1
		1/2	5.3	/				
8-SLR-91-1	2.1	1/2	5.3	7.5	11.8	178±6	89±5	25±1
		5/8	8	11.2				
8-SLR-91-1-1/4	4.24	5/8	8	11.2	17.7	222±7	111±6	32±1/-2
		3/4	11.2	16				
8-SLR-91-1-1/2	7.17	3/4	11.2	16	27.7	267±7	135±6	38±1/-2
		7/8	15	21.2				
8-SLR-91-1-3/4	11.55	7/8	15	21.2	38.5	305±10	152±6	45±1/-2
		1	21.2	/				
8-SLR-91-2	17.2	1	21.2	30	46.9	355±10	178±6	51±1/-2
		11/4	31.5	/				
8-SLR-91-2-1/4	24.5	11/4	31.5	45	64.9	406±10	203±7	57±1/-2
8-SLR-91-2-1/2	30.9	/	/	/	72.6	406±10	203±7	63.5±3
8-SLR-91-2-3/4	39.5	/	/	/	98.4	406±10	241±7	70±3
8-SLR-91-3	50.34	/	/	/	103	457±15	228±7	76±3
8-SLR-91-3-1/4	65.68	/	/	/	119	508±15	254±7	82.5±3
8-SLR-91-3-1/2	90.24	/	/	/	126	610±15	305±10	89±3
8-SLR-91-3-3/4	89.27	/	/	/	152	508±15	254±7	95±3
8-SLR-91-4	103.43	/	/	/	169	508±15	254±7	102±3


SLR032-G80 80级欧标强力子母环 EUROPEAN TYPE G80 MASTER LINK ASSEMBLY

Item No.	G80 EN818-2 CHAIN(mm) FOR 3 OR 4 LEG SLING	WEIGHT (KG)	WII Rope (T)	DIMENSIONS (mm) A	B	D	a	b	d
8-SLR032-6	6	1.18	2.36	135	75	18	54	25	13
8-SLR032-7	7	1.24	3.15	135	75	18	50	38	13
8-SLR032-8	8	2.2	4.25	160	90	22	70	34	16
8-SLR032-10	10	3.4	6.7	180	100	26	85	40	18
8-SLR032-13	13	6.1	11.2	200	110	32	115	50	22
8-SLR032-16	16	9.98	17	260	140	36	140	65	26
8-SLR032-18	18	18.9	21.2	340	180	45	180	100	32
8-SLR032-20	20	22.6	26.5	350	190	50	180	100	32
8-SLR032-22	22	25.2	31.5	350	190	50	180	100	36
8-SLR032-26	26	35.2	45	400	200	56	180	100	40
8-SLR032-28	28	47	50	130	220	63	180	100	45
8-SLR032-32	32	66.46	63	460	250	72	200	110	50

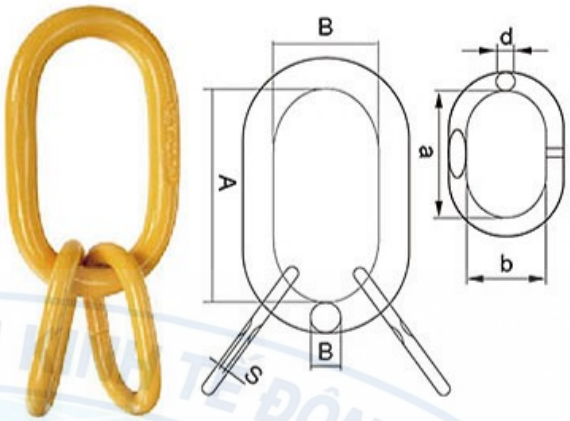


SLR033-G80 80级欧标强力环 EUROPEAN TYPE G80 MASTER LINK

Item No.	G80 EN818-2 CHAIN(mm) FOR 1 LEG (mm)	FOR 8 LEG (mm)	WEIGHT (KG)	WII Rope (T)	DIMENSIONS (mm) A	B	D
8-SLR033-76	7	6	0.34	1.6	110	60	13
8-SLR033-87	8	7	0.54	2.12	110	60	16
8-SLR033-108	10	8	0.82	3.15	135	75	18
8-SLR033-1310	13	10	1.5	5.3	160	90	22
8-SLR033-1613	16	13	2.3	8	180	100	26
8-SLR033-1816	18	16	3.95	11.2	200	110	32
8-SLR033-2018	20	18	6.34	1zvv4	260	140	36
8-SLR033-2220	22	20	8.96	17	300	160	40
8-SLR033-2622	26	22	12.8	21.2	340	180	45
8-SLR033-3226	32	26	16.55	31.5	350	190	50
8-SLR033-3632	36	32	23.28	45	400	200	56
8-SLR033-4036	40	36	32	56	430	220	63
8-SLR033-72MM	45	40	45.76	63	460	250	72
8-SLR033-80MM	/	45	62	85.46	500	270	80

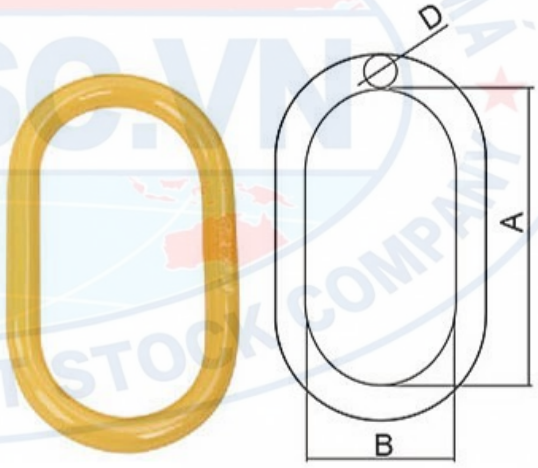

SLR034-FORGED 合金钢锻造梨形环 ALLOY STEEL PEAR SHAPED LINK


Item No.	WEIGHT (KG)	WII Rope (T)	B.L (T)	DIMENSIONS (mm) A	B	C	D
SLR034-3/8	0.1	1.6	8	10	28.5	19	10
SLR034-1/2	0.25	3.2	16	12.5	38	25.5	12.5
SLR034-5/8	0.5	4.1	20.5	16	47.5	32	16
SLR034-3/4	0.8	5.6	28	19	57	38	19
SLR034-7/8	1.4	6.4	32	22	67	44.5	22.2
SLR034-1	1.9	11	55	25	76	51	25.4
SLR034-1-1/8	2.92	13.9	69.5	28	86	57	28.5
SLR034-1-1/4	3.75	16.3	81.5	32	95	63.5	32
SLR034-1-3/8	5.12	19.5	97.5	35	105	70	35
SLR034-1-1/2	6.5	24.6	123	38	114	76	38
SLR034-1-5/8	8.4	28.4	142	41.5	124	82.5	41.3
SLR034-1-3/4	10.21	38.5	192.5	44.5	133	89	44.5
SLR034-1-7/8	13.15	43.5	217.5	48	143	95.5	47.6
SLR034-2	15.42	46.5	232.5	51	152.5	102	51
SLR034-2-1/4	21.78	64.9	324.5	57.5	171.5	114.5	57
SLR034-2-1/2	29.94	66.8	334	63.5	190.5	127	63.5
SLR034-2-3/4	39.92	98.4	492	70	209.5	140	70
SLR034-3	51.71	103.4	517	76.5	229	152.5	76
SLR034-3-1/4	66.23	118.9	594.5	82.5	248	165	82.5
SLR034-3-1/2	82.1	126.6	633	89	257.5	178	89
SLR034-4	122.93	169.2	846	102	305	203.5	101.5

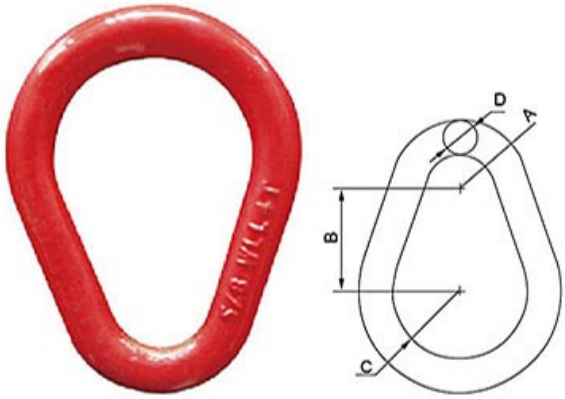








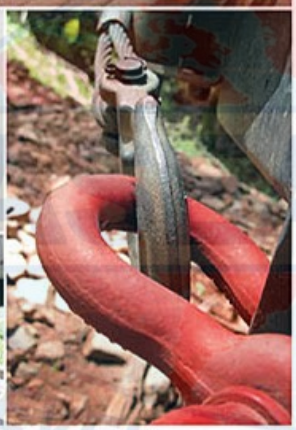

CONNECTING LINK
80级欧标双环扣

SLR074-G80

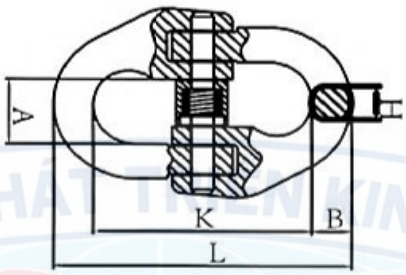




Item No.	WEIGHT (KG)	WII Rope (T)	B.L (T)	A±1.5	B±1	L±2.5	K±2	H±1
8-SLR074-06	0.08	1.12	4.48	15	7.5	58	42	7
8-SLR074-7	0.145	1.5	6	19	8.5	71.8	54.8	8.5
8-SLR074-7/8	0.146	2	8	18	9.5	79.5	60.5	8.5
8-SLR074-8	0.16	2	8	19.5	9.5	79.5	60.5	8.5
8-SLR074-10	0.3	3.15	12.6	25	12	90.5	68	11.5
8-SLR074-13	0.65	5.3	21.2	29	15	117	87	15
8-SLR074-16	1.15	8	32	34.5	19.8	148	108.4	19.8
8-SLR074-18	1.84	10	40	38	21	154	112	21
8-SLR074-20	2.1	12.5	50	41	24	169.5	121.5	24
8-SLR074-22	2.87	15	60	48	26	193.5	141.5	26
8-SLR074-26	4.5	21.2	84.8	57.5	31	220	158	30
8-SLR074-32	8.21	31.5	126	67	38	281	205	37

EYE SELFLOCK HOOK
80级眼型安全钩

SLR081-G80

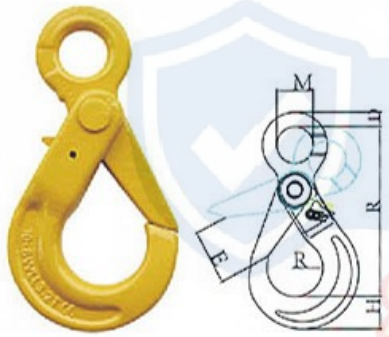

Item No.	WEIGHT (KG)	WII Rope (T)	B.L (T)	M±1	R±2.5	D±1	R±1	H±1	E±2
8-SLR081-06	0.5	1.12	4.48	22	110.5	10	34	19.5	28
8-SLR081-7/8	0.8	2	8	25	136	12	46	24	34
8-SLR081-10	1.43	3.15	12.6	32	171	15	56	30	44
8-SLR081-13	2.86	5.3	21.2	40.5	208.5	19.5	69	40	52
8-SLR081-16	5.64	8	32	56	257.5	22	86	50.5	60
8-SLR081-20	7.6	12.5	50	64.5	275	27	100	55	81
8-SLR081-22	13	15	60	70	320	30	98	67	82
8-SLR081-26	18	21.2	84.8	80	363	34	110	75	110
8-SLR081-32	44.5	31.5	126	105	472	45	166	97	168


EYE SLING HOOK WITH CAST LATCH
80级含舌眼型吊钩

SLR013-G80



Item No.	WEIGHT (KG)	WII Rope (T)	B.L (T)	B±1	E±1	D±1	A±1	L±2
8-SLR013-06	0.3	1.12	4.48	9	24	21	20	108
8-SLR013-7/8	0.4	2	8	11	30	26	25	133
8-SLR013-10	0.9	3.15	12.6	15	34	39	38	167
8-SLR013-13	1.7	5.3	21.2	19	39	54	43	213
8-SLR013-16	3.2	8	32	23	46	64	50	255
8-SLR013-20	5.8	12.5	50	24	40	80	62	305
8-SLR013-22	8.5	15	60	32	71	80	62	348
8-SLR013-26	13	21.2	84.8	35	81	82	64	394
8-SLR013-32	17	31.5	126	37	102	112	88	480



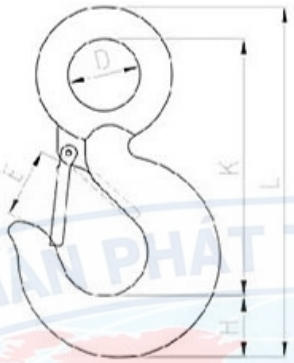


EYE SLING HOOK WITH LATCH
80级眼型货钩

SLR039-G80

ITEM NO.	Weight (kg)	WLL (T)	B.L (T)	D±1	E±1.5	H±1	K±2	L±2
8-SLR039-06	0.27	1.12	4.48	19	22	20.5	82	112
8-SLR039-7/8	0.6	2	8	28	25	26	104.5	142
8-SLR039-10	0.84	3.15	12.6	31	27	28	120	163
8-SLR039-13	1.81	5.3	21.2	39	35.5	40	146	203
8-SLR039-16	3.35	8	32	51	44	45	187.5	255
8-SLR039-18/20	6.1	12.5	50	62	55	57	231.5	317
8-SLR039-22	9.6	15	60	73	57	66	262	360
8-SLR039-26	16	21.2	84.8	89	83	79.6	318	433
8-SLR039-32	25.8	31.5	126	90	92	91	360	495.5





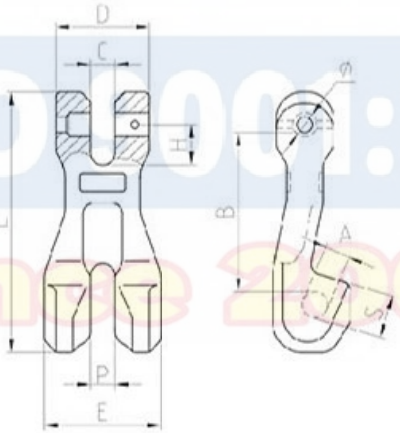

CLEVIS CLUTCH
80级链条调节器

SLR073-G80

ITEM NO.	Weight (kg)	WLL (T)	B.L (T)	A±0.3	B±2	C±0.5	D±1	E±2	H±1	L±2	φ±0.5	P±0.5	S±0.3
8-SLR073-06	0.18	1.12	4.48	8	44	7.5	30	32.8	11.8	73.5	7.8	7.5	12
8-SLR073-7/8	0.45	2	8	10.5	61.7	9.5	36	45	15.7	101	9.2	9.5	17
8-SLR073-10	0.93	3.15	12.6	12.4	92	13	48	55	20	138	13.2	13	28
8-SLR073-13	1.88	5.3	21.2	16	115	16.5	59	75	24.5	177	16.2	16.5	34.5
8-SLR073-16	3.5	8	32	19.5	143	21	73	93	30.5	220	20	21	40
8-SLR073-18/20	4.43	12.5	50	23	152	23.5	81	102	36	238	24.3	23.5	46
8-SLR073-22	8.05	15	60	26	195	25.5	98	118	42	295	28.1	25.5	57.5


ASEAN JSC.VN
DEVELOPMENT JOINT STOCK COMPANY
ISO 9001:2015
Since 2006





EYE GRAB HOOK
80级眼型翅钩

SLR085-G80




Item No.	WEIGHT (KG)	WII Rope (T)	B.L (T)	E±0.5	D±1	H±1	R±2	L±2
8-SLR085-06	0.14	1.12	4.48	8	13.5	17.9	51.4	75.3
8-SLR085-7/8	0.245	2	8	10.8	18	20	61.5	91.2
8-SLR085-10	0.65	3.15	12.6	13	20	29	80	122
8-SLR085-13	1.39	5.3	21.2	16.5	26	42.8	99.7	158
8-SLR085-16	2.2	8	32	20	30.5	47.7	104	169
8-SLR085-20	4.6	12.5	50	25	37.5	56	140	219
8-SLR085-22	8.2	15	60	28	44	68	165	259
8-SLR085-26	9.8	21.2	84.8	30	41	77	188.8	298
8-SLR085-32	19.4	31.5	126	38	57	95	228	361



EYE FOUNDRY HOOK
80级眼型大开口钩

SLR015-G80




Item No.	WEIGHT (KG)	WII Rope (T)	B.L (T)	E±1.2	A±1	D±1	H±1	M±1	N±0.5	K±2	L±2
8-SLR015-7/8	1.09	2	8	63.5	39	18	31	25.4	18	120	163
8-SLR015-10	2.04	3.15	12.6	76	50.8	22	38	32.6	23	146	200
8-SLR015-13	3.22	5.3	21.2	89	63.5	27	44.5	38.1	27	171	238
8-SLR015-16	5.53	8	32	102	76	32	52	46	32	198	278
8-SLR015-20	8.75	12.5	50	114.5	89	38	65	55	39	232	325
8-SLR015-22	11.93	15	60	127.5	102	45	69	57	40	256	361
8-SLR015-26	16.8	21.2	84.8	140	126	67.5	77	66	45	283	402
8-SLR015-32	26.6	31.5	126	153.5	151.5	81.5	97.5	80	58	327	461



SWIVEL SELFLOCK HOOK
80级旋转安全钩

SLR083-G80




Item No.	WEIGHT (KG)	WII Rope (T)	B.L (T)	B±2	C±2	D±1	L±3	T±1.5	E±2
8-SLR083-06	0.71	1.12	4.48	32.5	22	11.25	170	34	29
8-SLR083-7/8	1.1	2	8	35.5	26	12.5	210	46	34
8-SLR083-10	2	3.15	12.6	42	34	15	247	56	44
8-SLR083-13	4	5.3	21.2	50	38.5	16	302	69	52
8-SLR083-16	7.3	8	32	61	55	21.5	383	86	60
8-SLR083-20	11.6	12.5	50	72	61	26	418	100	83
8-SLR083-22	16	15	60	95	95	33	527	98	88
8-SLR083-26	21.5	21.2	84.8	122	115	42	610	110	95.5
8-SLR083-32	79	31.5	126	140	126	52	777	166	150

CLEVIS SELFLOCK HOOK
80级羊角安全钩

SLR082-G80






Item No.	WEIGHT (KG)	WII Rope (T)	B.L (T)	E±2	B±0.5	H±1	N±1.5	R
8-SLR082-06	0.5	1.12	4.48	29	8.5	19.5	34	95.5
8-SLR082-7/8	0.8	2	8	34	9.5	24	46	121
8-SLR082-10	1.5	3.15	12.6	44	12	30	56	146
8-SLR082-13	2.8	5.3	21.2	52	15	40	69	182
8-SLR082-16	5.6	8	32	60	18	50.5	86	218
8-SLR082-20	7.5	12.5	50	83	25	55	100	240
8-SLR082-22	11.5	15	60	88	25.5	67	98	276.5
8-SLR082-26	18.5	21.2	84.8	95.5	30	75	110	310.5
8-SLR082-32	49.1	31.5	126	160	36	97	166	400.5

CLEVIS SLING HOOK WITH CAST LATCH
80级含铸舌羊角吊钩

SLR012-G80






Item No.	WEIGHT (KG)	WII Rope (T)	B.L (T)	A±0.5	B±1.5	D±1	H±1	L±2	E±2
8-SLR012-06	0.32	1.12	4.48	8	32	35	23	76	26
8-SLR012-7/8	0.48	2	8	9.5	37	37	32.5	85.5	29
8-SLR012-10	0.95	3.15	12.6	13	49	46	35	104	39
8-SLR012-13	1.8	5.3	21.2	16.5	56.5	56	42.5	128	27
8-SLR012-16	3.4	8	32	21.5	70.5	60	54	150	55
8-SLR012-20	6	12.5	50	24	77	79	58	180	61
8-SLR012-22	10.4	15	60	27	91	101	62	213	72
8-SLR012-26	14.5	21.2	84.8	30	117	115	75	250	85
8-SLR012-32	27	31.5	126	35	150	140	88	317	106

CLEVIS GRAB HOOK
80级羊角翅钩

SLR086-G80






Item No.	WEIGHT (KG)	WII Rope (T)	B.L (T)	E±1	A±0.5	H±1	W±1	L±2
8-SLR086-06	0.25	1.12	4.48	8.3	8	17.7	26.7	75
8-SLR086-7/8	0.32	2	8	11	9.5	18.5	33.5	89
8-SLR086-10	0.73	3.15	12.6	13	12.5	29	46	126
8-SLR086-13	1.6	5.3	21.2	16.5	15	42.5	57.5	163.5
8-SLR086-16	2.8	8	32	19	18.5	42.5	74	183.5
8-SLR086-20	5	12.5	50	24	23	56	74	219
8-SLR086-22	6.3	15	60	27	27	68.5	90	254
8-SLR086-26	14.5	21.2	84.8	30	30	77	102	309

CLEVIS SLING HOOK WITH CAST LATCH
80级羊角吊钩

SLR333-G80





Item No.	WEIGHT (KG)	WII Rope (T)	B.L (T)	A±0.5	B±1.2	E±1	H±2	M±2	L±2
8-SLR333-06	0.3	1.12	4.48	7.5	32	19.5	20	68	108
8-SLR333-7/8	0.55	2	8	9.5	38.5	24	25	85.5	131
8-SLR333-10	0.96	3.15	12.6	13	48	28	36	106	163.5
8-SLR333-13	1.52	5.3	21.2	16.5	55	34.5	41.6	130	196
8-SLR333-16	3.43	8	32	18.5	65.5	43	46.2	155.5	236
8-SLR333-20	6.73	12.5	50	24	92	51.5	51	180	181

Cable Puller / Cable Grips
牵引机 / 电缆钳

CABLE PULLER
牵引机
SDB



SDB8020
Single Ratchet Wheel

SDB8020-1
Double Ratchet Wheel

SDB8021
Double Ratchet Wheel



SDB8041
Double Ratchet Wheel





- Construction
- Automative
- Farm & ranch
- Home Projects
- Workshop

ITEM NO.	CAPACITY (Ton)	DIA. OF STEEL WIRE	PULL OF DRAUGHT	LEVERAGE	PACKAGE SIZE (cm)	G.W./ N.W. (kg)	QTY/CTN (pcs)	QTY/20'CY (pcs)	RATCHET
SDB8020	2	ф 4.8	5.0 KN	15:1	60.5x31.5x18	16/14	6	5160	Single Ratchet Wheel
SDB8020-1	2	ф 4.8	5.8 KN	15:1	60.5x31.5x18	17/15	6	5160	Doule Ratchet Wheel
SDB8021	2	ф 4.8	6.8 KN	15:1	60.5x31.5x18	20/18	6	5160	Doule Ratchet Wheel
SDB8041	4	ф 5	7.85 KN	15:1	70x28x21	22/20	4	2560	Doule Ratchet Wheel

CABLE GRIPS
电缆钳
B






HAND RATCHET PULLER
紧索器
HRP





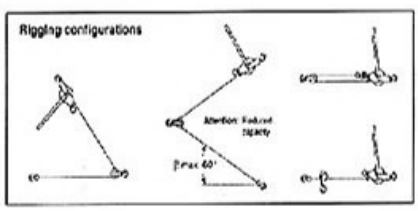


ITEM NO.	S.W.L. (kg)	CONDUCTOR DIA. (mm)	N.W. (kg)
B-0500	500	1-10	0.49
B-1000	1000	2.5-16	0.8
B-2000	2000	4-22	1.45
B-3000	3000	16-32	2.41


ITEM NO.	TRACTOR CAPACITY (KG)	WIRE ROPE SIZE (MM)	N.W. (kg)
HRP010	1000	Φ4.5x2400	3.25
HRP015	1500	Φ5.5x2400	4.05
HRP020	2000	Φ6x2400	4.25
HRP030	3000	Φ6.5x2400	5.3



Beam Clamp / Load Binder
夹 持 器 / 紧 索 器





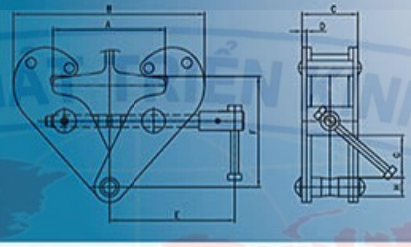



JTS 夹持器 BEAM CLAMP


SAFT WORKING LOAD (t)	ADJUSTABLE BEAM (mm)	A MAX	B MIN	B MAX	C	D (mm)	M	E	F MIN	F MAX	G	NET WEIGHT (kg)
1	70-245	270	183	375	144	66	84	210	102	165	91	4.5
2	70-245	270	183	375	144	74	84	210	102	165	91	5.5
3	70-355	365	240	520	210	103	125	258	135	225	108	11.5
5	70-355	365	240	520	210	111	125	258	135	225	108	15.51
10	80-350	365	250	520	270	120	161	280	160	230	176	26

JT 夹持器 BEAM CLAMP

SAFT WORKING LOAD (t)	ADJUSTABLE BEAM (mm)	A MAX	B MIN	B MAX	C	D (mm)	E	F MIN	F MAX	G	H	NET WEIGHT (kg)
1	75-220	260	180	360	64	5	215	102	155	25	22	4.5
2	75-220	260	180	360	74	6	215	102	155	25	22	5.2
3	80-320	354	235	490	103	8	260	140	225	45	24	10.0
5	80-320	354	235	490	110	10	260	140	225	45	28	11.1
10	90-320	365	320	505	120	12	280	170	235	50	40	20.0

LOAD BINDER
紧索器


MRLB
MLLB

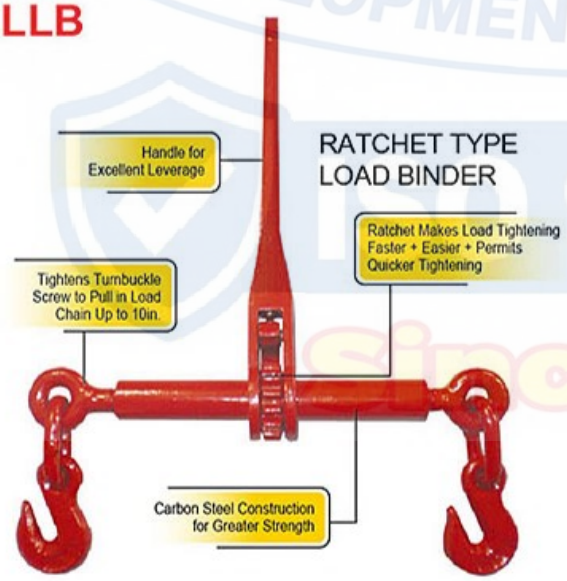



Information:

This load binder is the professional way to clamp, bind, anchor and tie down large loads. Big handles and carbon steel construction for maximum leverage, greater strength and easy handling. Ideal for truckers and farmers. Ratchet makes load tightening faster and easier and permits quicker tightening if load shifts. Equipped with double hooks.

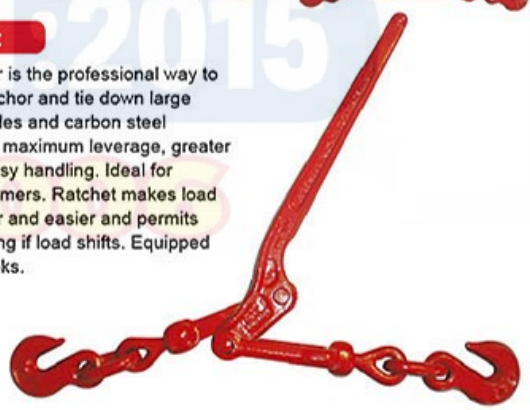

MRLB 紧索器 LOAD BINDER

ART NO.	SIZE (inch)	W.L.L (lbs)	PROOF LOAD (lbs)	UTIMATE LOAD (lbs)	N.W. (lbs)	HANDLE LENGTH (inch)
MRLB0104	1/4-5/16	2600	5200	9200	3.52	7.16
MRLB0516	5/16-3/8	5400	10800	19000	10.5	13.92
MRLB0308	3/8-1/2	9200	18400	33000	12.9	13.92
MRLB0102	1/2-5/8	13000	26000	46000	14.4	21.00

MLLB 紧索器 LOAD BINDER

ART NO.	SIZE (inch)	W.LL (lbs)	PROOF LOAD (lbs)	UTIMATE LOAD (lbs)	N.W. (lbs)	HANDLE LENGTH (inch)	Take Up (inch)
MLLB0104	1/4-5/16	2600	5200	9200	3.52	11.42	3.75
MLLB0516	5/16-3/8	5400	10800	19000	8.37	15.43	4.5
MLLB0308	3/8-1/2	9200	18400	33000	12.2	17.24	4.5
MLLB0102	1/2-5/8	13000	26000	46000	19.7	21.00	4.75



WEBBING SLING
吊装带
WLL

Features:

- Low weight, thus easy handling
- Prodection against hand injuries
- Prodection against cargo surface damaage
- Highly flexible and adaptable to given shapes
- Equal pressure distribution over tension and pressure sensitive loads
- Heat resistant up to +100°C
- Mcisture-resistant fabric, thus preventing frost damage (up to approx. -40°C)
- Low-strain, wear-resistant, long-life material (100% PES)

Four-Layer Webbing Sling

Accord with EN 1492-1

WLL (Work Load Limit)	Safe Factor	Colour	Width(mm)
WLL16T	7:1	Orange	240
WLL20T	7:1	Orange	300
WLL24T	7:1	Orange	300

Slingle ply Webbing Sling (SF=7:1)

Accord with EN 1492-1

WLL (Work Load Limit)	Safe Factor	Colour	Width(mm)
WLL1T	7:1	Green	60
WLL2T	7:1	Grey	120
WLL3T	7:1	Brown	180
WLL4T	7:1	Blue	240
WLL5T	7:1	Orange	300
WLL6T	7:1	Orange	300

Duplex Webbing Sling

WLL (Work Load Limit)	Safe Factor	Colour	Width(mm)
WLL1T	7:1	Violet	30
WLL2T	7:1	Green	60
WLL3T	7:1	Yellow	90
WLL4T	7:1	Grey	120
WLL5T	7:1	Red	150
WLL6T	7:1	Brown	180
WLL8T	7:1	Blue	240
WLL10T	7:1	Orange	300
WLL12T	7:1	Orange	300

Eye-eye Duplex Webbing Sling (SF=6:1 / SF=5:1)

Accord with JB/T 8521.1-2007

WLL (Work Load Limit)	Safe Factor	Colour	Width(mm)
WLL1T	6:1 / 5:1	Violet	25
WLL2T	6:1 / 5:1	Green	50
WLL3T	6:1 / 5:1	Yellow	75
WLL4T	6:1 / 5:1	Grey	100
WLL5T	6:1 / 5:1	Red	125
WLL6T	6:1 / 5:1	Brown	150
WLL8T	6:1 / 5:1	Blue	200
WLL10T	6:1 / 5:1	Orange	250
WLL12T	6:1 / 5:1	Orange	280
WLL16T	6:1 / 5:1	Orange	240
WLL20T	6:1 / 5:1	Orange	280
WLL24T	6:1 / 5:1	Orange	300



ASEAN ISC.VN
ISO 9001:2015
Since 2006

ROUND SLING
圆套

WLL





Round Sling
Accord with EN 1492-2

WLL (Work Load Limit)	Safe Factor	Colour	Width(mm)
WLL1T	7:1	Violet	45
WLL2T	7:1	Green	50
WLL3T	7:1	Yellow	60
WLL4T	7:1	Grey	75
WLL5T	7:1	Red	85
WLL6T	7:1	Brown	95
WLL8T	7:1	Blue	110
WLL10T	7:1	Orange	125
WLL12T	7:1	Orange	140
WLL16T	7:1	Orange	155
WLL20T	7:1	Orange	170
WLL24T	7:1	Orange	200

Single ply sleeve round sling
Accord with EN 1492-2

- Low weight for easy using
- Low value for accasional use

WLL (Work Load Limit)	Safe Factor	Colour	Width(mm)
WLL1T	7:1	Violet	42
WLL2T	7:1	Green	46
WLL3T	7:1	Yellow	58
WLL4T	7:1	Grey	72
WLL5T	7:1	Red	83
WLL6T	7:1	Brown	92
WLL8T	7:1	Blue	102
WLL10T	7:1	Orange	116

Extra thick sleeve round sling
Accord with EN 1492-2

- Extra thick sleeve, well wear resistance, and long useful life for ofen use.
- Double ply sleeve, well protection for inner yarn use for all condition

WLL (Work Load Limit)	Safe Factor	Colour	Width(mm)
WLL1T	7:1	Violet	54
WLL2T	7:1	Green	60
WLL3T	7:1	Yellow	73
WLL4T	7:1	Grey	73
WLL5T	7:1	Red	82
WLL6T	7:1	Brown	82
WLL8T	7:1	Blue	100
WLL10T	7:1	Orange	110










RATCHET LASHING
捆绑带

SG7101

SG7101
SIZE:2"X6/8/10MM
Webbing 50mm
Breaking load: 3000kg/5000kg
with double J type hook

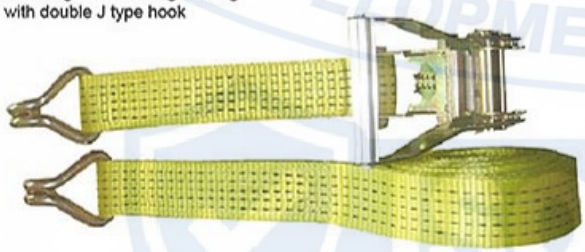

RATCHET LASHING
捆绑带

SG7102

SG7102
SIZE:2"X6/8/10MM
Webbing 50mm
Breaking load: 2000kg/5000kg
with double J type hook



RATCHET LASHING
捆绑带

SG7104


SG7104
SIZE:3"X8/12MM
Webbing: 75mm
Breaking load: 1000kg
Ratchet tie down with flat hook




RATCHET LASHING
捆绑带

SG7103

SG7103
SIZE:2"X8/10/12MM
Webbing 50mm
with double J type hook
Breaking load: 3000kg/5000kg

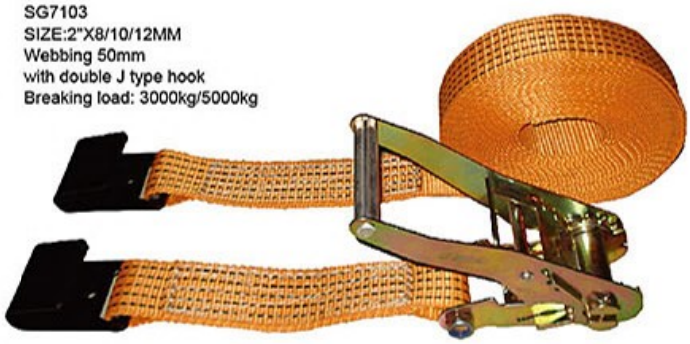

ASEAN ISO.VN
ISO 9001:2015
Since 2006

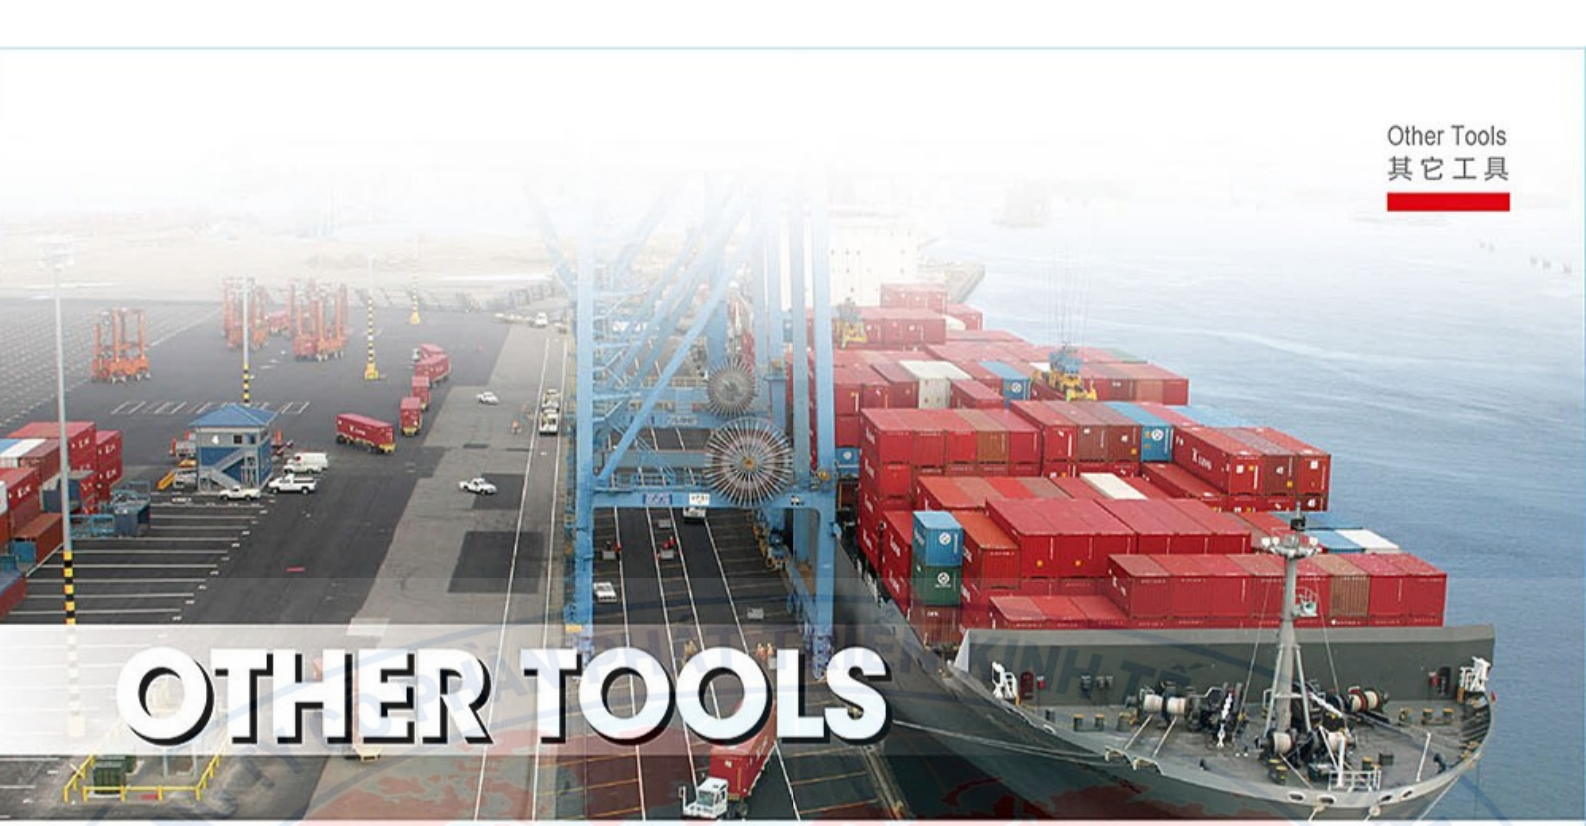

OTHER TOOLS



DTK
搬运小坦克
CARGO TROLLEY

Model	DTK4	DTK6	DTK8	DTK12
WLL (tonnes) per pair	6	8	12	18
Number Of Wheels	4	6	8	12
Weight(kg)	15	22	29	43
Package size(mm)	320*210*110	400*210*110	500*210*113	500*300*115

CHAIN BINDER
链条拉紧器



S.W.L. (kg)	T.L. (kg)	N.W. (kg)	DIA. OF CHAIN (mm)
1000	1500	5.5	6x8

SHEAVE
滑轮

SIZE: Between 2 inch to 75 inch



STEEL PULLEY
夹板轮

BYO



SIZE (m)	S.W.L. (kg)	N.W. (kg)	FOR WIRE DIA. (mm)
5	5000	3.5	13-15

STEEL PULLEY
夹板轮

BY



SIZE (kg)	S.W.L. (kg)	N.W. (kg)	DIA. OF CHAIN (mm)
4	3400	3.4	8-9

BARREL HOOKS
油桶吊钩



S.W.L.	ϕ (mm)	L (mm)	T (mm)
1	ϕ40	125	12.5
2	ϕ40	135	15

CONNECTING LINK
双抱扣

SIZE	FOR ROPE DIA.
1/4"	6
5/16"	8
3/8"	10
1/2"	12-14
5/8"	16
3/4"	20
7/8"	22
1"	25





SEAGULL
海鸥

科技创新，永不间断...
Scientific and technological innovation, and never without...

常熟海鸥起重机械有限公司
ChangShu Seagull Crane & Hoist Machinery Co., Ltd

地址：江苏省常熟市新港镇浒浦
Add: Xupu, Xingang Town, Changshu, Jiangsu, China.
邮编（PT): 215512
E-mail: info@seagullhoist.com

电话(Tel): 0086-512-52631331　0086-512-52631785
传真(Fax): 0086-512-52637785　0086-512-52091698
了解更多创新产品请访问 http://www.seagullhoist.com