



SINGLE CHAIN

DOUBLE CHAIN



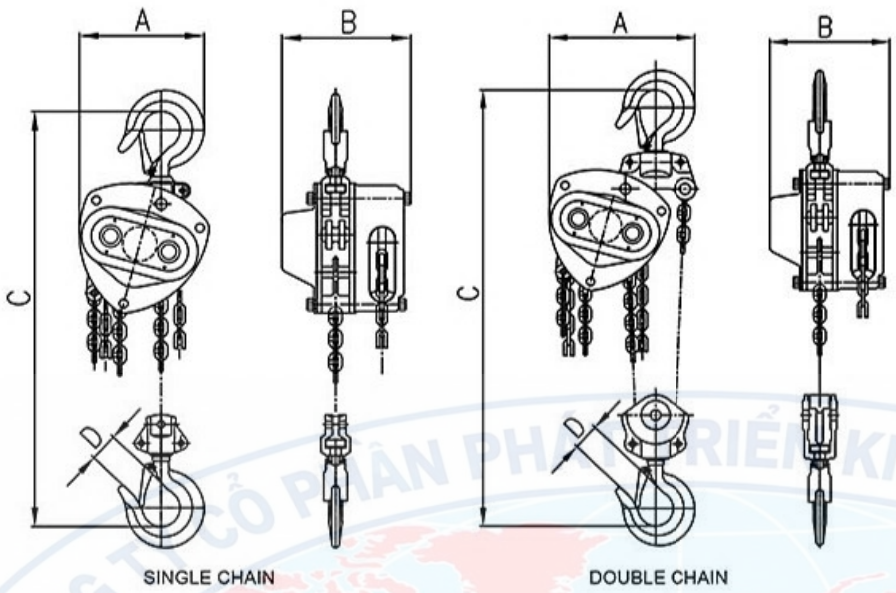



Optional features:
Overload protection system
Cast safety latches
G-80 electrophoresis chain
Special surface treatment of spare parts





HSZ-K 手拉葫芦 CHAIN BLOCKS

0.5 Ton - 30 Ton

Model		HSZ-0.5K	HSZ-1K	HSZ-1.5K	HSZ-2K	HSZ-3K	HSZ-5K	HSZ-10K	HSZ-20K	HSZ-30K
Rated load (T)		0.5	1	1.5	2	3	5	10	20	30
Standard lift (m)		2.5	2.5	2.5	2.5	3	3	3	3	3
Test load (T)		0.75	1.5	2.25	3	4.5	7.5	12.5	25	37.5
Efforts required at capacity (N)		262	324	395	330	402	430	438	438	442
Diameter of load chain (mm)		5	6	7.1	6	7.1	10	10	10	10
No. of load chains		1	1	1	2	2	2	4	8	12
Dimensions (mm)	A	120	147	181	158	202	228	373	638	703
	B	116	136	147	136	148	178	178	195	397
	C	285	332	410	470	550	640	737	1022	1050
	D	28	32	38	40	44	50	64	82	82
Net weight (kg)		7	10	15	23	23	38	68	160	235
Extra weight per meter of extra lift (kg)		1.5	1.8	2	3.2	3.2	5.3	9.8	19.6	28.3