


CHAIN BLOCKS
手拉葫芦

HSZ-J

Features:
Chain block is widely used in factories, miners, docks, warehouses, construction sites, agriculture and other fields, to lift goods and lifting equipment, in particular in conditions with no power supply or narrow, demonstrate superiority.

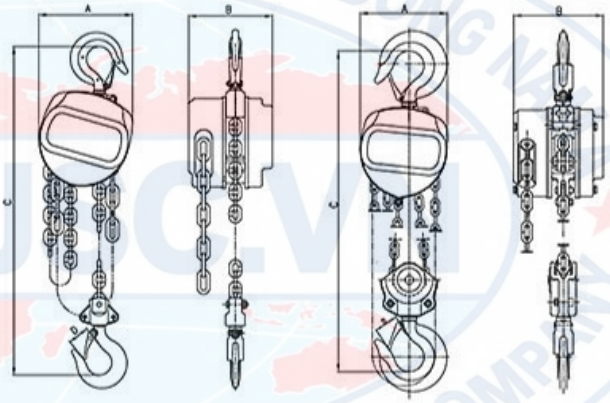

SINGLE CHAIN　　DOUBLE CHAIN



HSZ-J 手拉葫芦 CHAIN BLOCKS

0.5 Ton - 30 Ton

Model		HSZ-0.5J	HSZ-1J	HSZ-1.5J	HSZ-2J	HSZ-3J	HSZ-5J	HSZ-10J	HSZ-20J	HSZ-30J
Rated load (T)		0.5	1	1.5	2	3	5	10	20	30
Standard lift (m)		2.5	2.5	2.5	2.5	3	3	3	3	3
Test load (T)		0.75	1.5	2.25	3	4.5	7.5	12.5	25	37.5
Efforts required at capacity (N)		262	314	343	318	347	382	390	390	394
Diameter of load chain (mm)		5	6	8	6	8	10	10	10	10
No. of load chains		1	1	1	2	2	2	4	8	12
Dimensions (mm)	A	125	147	183	147	183	215	365	595	700
	B	111	126	141	126	141	163	163	191	394
	C	260	275	345	396	486	616	700	1000	1050
	D	28	32	38	40	44	50	64	82	82
Net weight (kg)		8	11	16	16	25	38	69	155	233
Extra weight per meter of extra lift (kg)		1.5	1.7	2.4	2.5	3.7	5.3	9.7	19.4	28.3