



GEARED TROLLEY
手拉小车

CSL-Y4

Features:

The manual trolley is heavy-duty side frames and fully machined wheel tread for a superior performance over a long life. Trolleys are equipped with Lifetime lubricated and precision ball bearings. Heavy rolled steel side frames extend beyond the wheels to provide these trolleys with superior strength, rigidity and added protection for the trackwheels. Units operate on universal wheel treads for use on flat or tapered beam flanges. Trolley wheels are fully machined from alloy cast iron and hardened for high strength and long life.

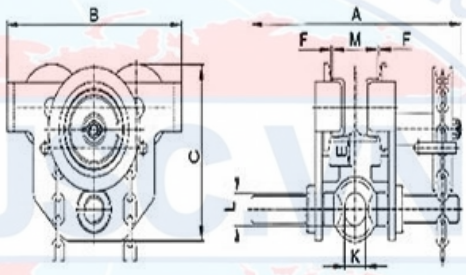

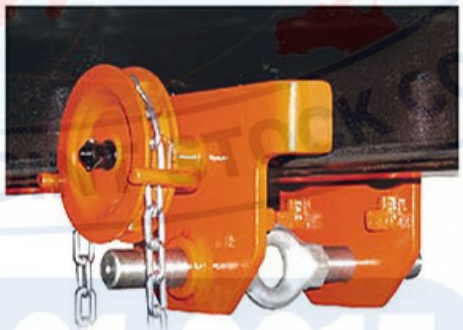

CSL-Y4 手拉小车 GEARED TROLLEY

Model		0.5t	1t	2t	3t	5t
Rated capacity (T)		0.5	1	2	3	5
Test load (Kn)		6.25	12.5	25	37.5	62.5
Running height (m)		3	3	3	3	3
Chain pull to lift full load (N)		45	55	100	75	120
Min radius of curve (m)		0.9	1	1.2	1.3	1.4
Dimensions (mm)	A Pylon	292	300	314	350	359
	Lengthen pylon	377	385	395	409	414
	B	225	252	300	360	392
	C	173	188	226	289	313
	E	33	31	32	46	47
	F	≈3	≈3	≈3	≈3	≈3
	K	25	30	40	48	60
	L	30	35	47	58	70
Adjustable beam width	M Pylon	50-220	58-220	66-220	74-220	90-220
	Lengthen pylon	160-305	160-305	160-305	160-305	160-305
Extra weight per meter of extra lift (kg)		≈1	≈1	≈1	≈1	≈1
Net weight (kg)	Pylon	11.4	14.7	21.8	36.7	48.5
	Lengthen pylon	11.8	15.2	22.6	37.9	50