
HAND WINCH
手动卷扬机

JC-B


(600 - 1400LBS)


(2000 - 2500LBS)


Remarks: The rated capacity means the max. capacity when the winch to be winded the first layer of wire rope, and proportion decreased by adding numbers of layer of wire rope accordingly.

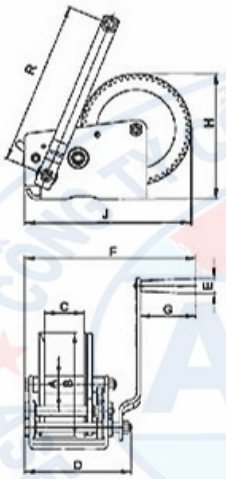

Model		600 lb	800 lb	1000 lb	1200 lb	1400 lb	2000 lb	2500 lb
Rated capacity (lb)		600	800	1000	1200	1400	2000	2500
Test load (Kn)		4.1	5.4	6.8	8.2	9.5	13.6	17
Single Speed / Double Speed		Single	Single	Single	Single	Single	Double	Double
Transmission ratio		2.9:1	3.7:1	4.2:1	4.2:1	4.2:1	10.35:1/4.5:1	11.5:1/5:1
Hand operated strength (N)		70	75	85	100	120	150	160
Dimensions (mm)	A	Φ21	Φ21	Φ21	Φ21	Φ21	Φ27	Φ27
	B	Φ116	Φ116	Φ135	Φ135	Φ135	Φ150	Φ165
	C	51	51	51	51	51	65	65
	D	119	119	119	119	119	174	174
	E	Φ25	Φ25	Φ25	Φ25	Φ25	Φ25	Φ25
	F	228	228	228	228	228	281	281
	G	91	91	91	91	91	91	91
	H	138	138	156	156	156	182	191
	J	165	165	184	184	184	250	256
	R	180	180	180	180	180	251	251
Net weight(no wire rope) (kg)		2.4	2.5	2.8	2.8	2.8	5.9	6.4

HAND WINCH
手动卷扬机

JC-E

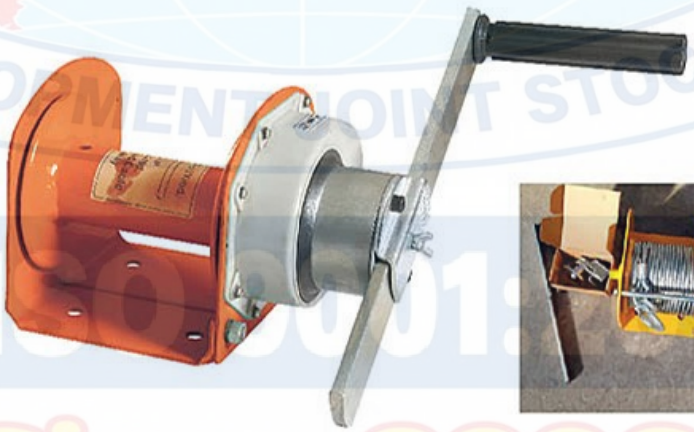

HEAVY DUTY



JC-E 手动卷扬机 HAND WINCH

Model		0.1 t	0.3 t	0.5 t	1 t	2 t	3 t
Safe Working Load (t)		0.1	0.3	0.5	1	2	3
Test load (Kn)		1.225	3.675	6.125	12.25	24.5	36.75
Adopted Wire Rope dia x length (mm)		Φ5x30	Φ6.3x30	Φ6.3x40	Φ8x40	Φ9x40	Φ12.5x40
Speed Ratio		1:1	2.88:1	4.33:1	12.19:1	22.68:1	29.16:1
The Max. Length of Link-pole action (mm)		240	350	350	350	350	350
Min. Force of Hand Turn (N)		115	110	120	120	130	180
Dimensions (mm)	A	Φ48	Φ60	Φ60	Φ76	Φ90	Φ100
	B	Φ110	Φ125	Φ140	Φ175	Φ190	Φ230
	C	116	150	150	154	195	205
	D	80	100	100	110	155	155
	E	Φ11	Φ15	Φ15	Φ18	Φ18	Φ18
	F	402	403	403	443	490	549
	H	147	174	182	214	230	296
	I	90	130	130	170	170	170
	J	160	220	245	266	300	365
Net weight(no wire rope) (kg)		6.9	11.8	14.4	19.7	25.1	44.3

