WIRE BLOCKS
钢索滑车
YB / YBO

Description:

This block structure is simple, easy to use, can be repeatedly changed pulley and pulley traction cables running and lifting or moving objects in the direction of, especially by joint pulley the pulley, with the winch, mast or other lifting appliances, lifting tackle is widely used in construction and installation operations. Mainly used in factories, mines, agriculture, electricity, construction and other construction, dock, dock, warehouse machines installed, cargo lifting, and so on.



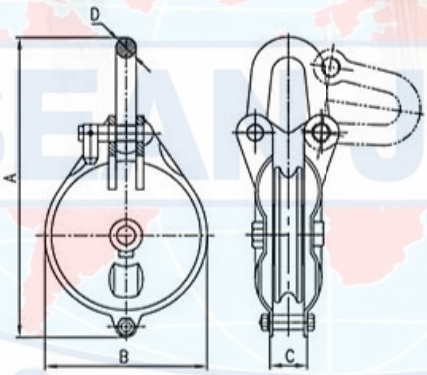



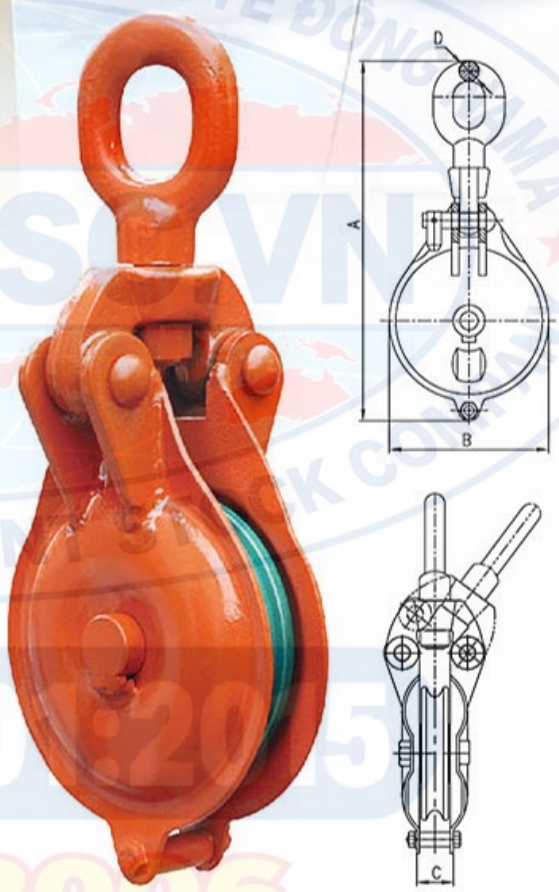

YB 船用卸扣钢索滑车 MARINE SHACKLE WIRE BLOCKS

TYPE	SHEAVE DIA (mm)	S.W.L (t)	DIMENSIONS (mm) A	B	C	D	N.W. (kg)	FOR WIRE DIA (mm)
YB75x1	75	0.5	178	85	26	12	1.1	8
YB100x1	100	1	235	121	34	16	1.8	8
YB125x1	125	1.5	305	145	38	18	3.5	9
YB150x1	150	2	350	180	41	22	5.1	12
YB200x1	200	4	425	225	46	28	11.5	16
YB250x1	250	5	495	275	60	28	17	22
YB75x2	75	0.5	178	85	50	12	1.8	8
YB100x2	100	1	235	121	61	16	2.8	8
YB125x2	125	1.5	305	145	73	18	5.5	9
YB150x2	150	2	350	180	83	22	8.5	12
YB200x2	200	4	425	225	93	28	16.5	16
YB250x2	250	5	495	275	115	28	25.5	22

YBO 船用吊环钢索滑车 MARINE EYE WIRE BLOCKS

TYPE	SHEAVE DIA (mm)	S.W.L (t)	DIMENSIONS (mm) A	B	C	D	N.W. (kg)	FOR WIRE DIA (mm)
YBO75x1	75	0.5	230	85	26	12	1.5	8
YBO100x1	100	1	285	121	34	16	2.4	8
YBO125x1	125	1.5	346	145	38	18	4.2	9
YBO150x1	150	2	419	180	41	22	6.4	12
YBO200x1	200	4	517	225	46	28	12.5	16
YBO250x1	250	5	655	275	60	28	16	22
YBO75x2	75	0.5	230	85	50	12	2.1	8
YBO100x2	100	1	285	121	61	16	3	8
YBO125x2	125	1.5	355	145	73	18	5.9	9
YBO150x2	150	2	365	180	83	22	9	12
YBO200x2	200	4	517	225	93	28	17.5	16
YBO250x2	250	5	600	275	115	28	28.6	22