Electric Hoist
电动葫芦
HHXG

Features:

A. Capacity from 500kg to 5000kg.
B. Quality chain is supplied by FEC JAPAN.
C. Most tensile safety hooks without break.
D. Compact and high efficient motor with heat protection device.
E. Push button is with 24v low voltage to guarantee safety.
F. Limit switch.
G. Limit load device are fitted.
H. Both single phase and three phase are available.
I. CE certified.
J. IP54 protection on electric hoist for dust and water proof protection.



European Electrics

Grease Filled reduction Gearbox



Limit Switches

Heavy Duty Motor



DC Brake

Robust All Steel Construction of Outer Housing



Overload Clutch



Moulded External Strainer Wire Built into Pendant Cord

FEC JAPAN Load Chain



Electro Plated Limit Spring

Thrust Race

Roller Bearings


Heavy Duty Cast Safely Latch

IP54 European 24V Pendant Control




Contactor Isolation Emergency Stop

CE

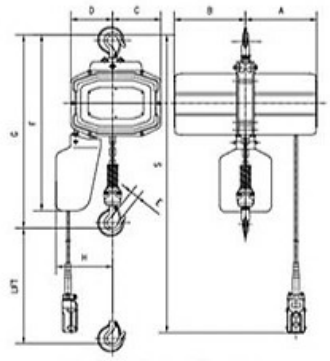


ELECTRIC CHAIN HOIST
500 kg 1000 kg

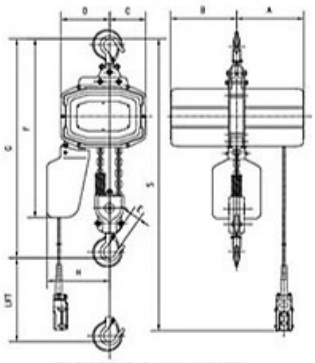


ELECTRIC CHAIN HOIST
2000 kg

Perfect for factories, logistics, transportation, enterprises, agriculture. High speed and high efficiency give you better working experience.



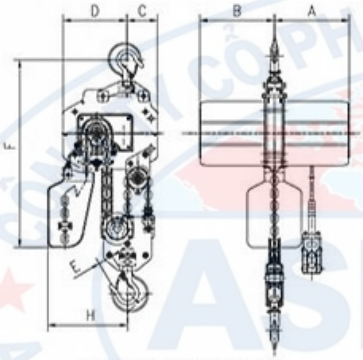

ELECTRIC CHAIN HOIST
3000 kg

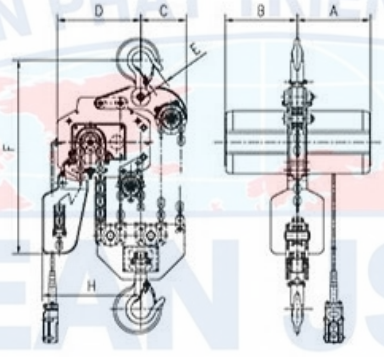

ELECTRIC CHAIN HOIST
5000 kg

HHXG2 单相环链电动葫芦 SUSPENDED TYPE SINGLE PHASE ELECTRIC CHAIN HOIST

Model	Rated Load (Ton)	Lift (m)	Lifting Speed (m/min)	Hoist Motor 1-phase			Load Chain		Dynamical Test (KN)	Min. Headroom MaxG(mm)	Net Weight (kg)	Major Dimensions(approx) (mm)						
				Output(kw)	Ins Class	% ED	Dia(mm)	Number of falls				A	B	C	D	E	F	H
HHXG205	0.5	3	5.2	0.8	F	40	7.1	1	5.5	545	64	249	249	168	146	25	640	197
HHXG210	1	3	5.2	1.2	F	40	7.1	1	11	580	65	249	249	168	146	32	640	197
HHXG220	2	3	2.6	1.2	F	40	7.1	2	22	740	72	249	249	134	180	38	675	231
HHXG230	3	3	1.7	1.2	F	40	7.1	3	33	790	80	249	249	100	214	41	658	265

HHXG3 三相环链电动葫芦 SUSPENDED TYPE THREE PHASE ELECTRIC CHAIN HOIST

Model	Rated Load (Ton)	Lift (m)	Lifting Speed (m/min)	Hoist Motor 3-phase			Load Chain		Dynamical Test (KN)	Min. Headroom MaxG(mm)	Net Weight (kg)	Major Dimensions(approx) (mm)						
				Output(kw)	Ins Class	% ED	Dia(mm)	Number of falls				A	B	C	D	E	F	H
HHXG305	0.5	3	6.3	0.8	F	40	7.1	1	5.5	545	64	249	249	168	146	25	640	197
HHXG310	1	3	6.3	1.6	F	40	7.1	1	11	580	65	249	249	168	146	32	640	197
HHXG320	2	3	3.2	1.6	F	40	7.1	2	22	740	72	249	249	134	180	38	675	231
HHXG330	3	3	2.1	1.6	F	40	7.1	3	33	790	80	249	249	100	214	41	658	265
HHXG350	5	3	1.3	1.6	F	40	7.1	5	55	950	135	249	249	190	309	48	703	360

HHXG3 三相双速环链电动葫芦 DOUBLE SPEED SUSPENDED TYPE THREE PHASE ELECTRIC CHAIN HOIST

Model	Rated Load (Ton)	Lift (m)	Lifting Speed (m/min)	Hoist Motor 3-phase			Load Chain		Dynamical Test (KN)	Min. Headroom MaxG(mm)	Net Weight (kg)	Major Dimensions(approx) (mm)						
				Output(kw)	Ins Class	% ED	Dia(mm)	Number of falls				A	B	C	D	E	F	H
HHXG305B	0.5	3	5.2/1.7	0.8/0.25	F	40	7.1	1	5.5	545	64	249	249	168	146	25	640	197
HHXG310B	1	3	5.2/1.7	1.2/0.4	F	40	7.1	1	11	580	65	249	249	168	146	32	640	197
HHXG320B	2	3	2.6/0.85	1.2/0.4	F	40	7.1	2	22	740	72	249	249	134	180	38	675	231
HHXG330B	3	3	1.7/0.58	1.2/0.4	F	40	7.1	3	33	790	80	249	249	100	214	41	658	265
HHXG350B	5	3	1.0/0.35	1.2/0.4	F	40	7.1	5	55	950	135	249	249	190	309	48	703	360