WATER PUMP PLIERS

▶ Features

- Firm biting on pipe, round bar, hex nut, flat board, and all kind of materials enabled by ideal jaw shape.
- 5~9 positions of jaw opening to adjust to the work size.



GW250H

GWZ250H

GW250H • GWZ250H

Standard Type (GWZ is Vinyl Grip Type)

Item No.	Size (mm)			No. of jaw position	N.W. (g)
	Full length	Jaw opening	Tip side width		
GW250H	254	0~47	10	5 adjustable type	325
GWZ250H	253	0~47	10	5 adjustable type	350

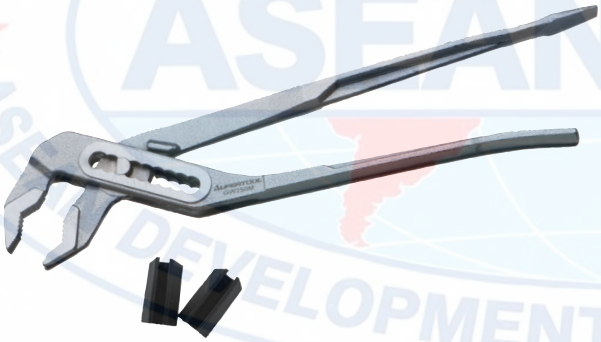

GW250M

Three-layered Structure Type

▶ Features

- The three-layered structure makes it very robust. No protruding fixing pin.
- The handle tip is equipped with a function to remove pan head screw (applicable pan head screw head external dia. : Φ3~Φ6.5mm).
- Including rubber pad to prevent scratch.



Item No.	Size (mm)			No. of jaw position	N.W. (g)
	Full length	Jaw opening	Tip side width		
GW250M	250	0~52	7	9 adjustable type	290



GWP250H

GWP-H

Strong Type with Pitch (JIS)

Item No.	Size (mm)			No. of jaw position	N.W. (g)
	Full length	Jaw opening	Tip side width		
GWP250H	255	0~43	9.5	5 adjustable type	375
GWP300H	305	0~58	11.5	6 adjustable type	685



GWS250H

Spring Type

Item No.	Size (mm)			No. of jaw position	N.W. (g)
	Full length	Jaw opening	Tip side width		
GWS250H	252	0~46	10	8 adjustable type	330

* Spring equipped inside, optimal for continuous work.

●For all the appendix of the piping tools, please refer to P.283