UGC-M

UNIVERSAL LIFTING CLAMP FOR CONCRETE MATERIAL (Adjustable Clamp Range Type)



UGC150M
(manual / machine type)

▶ Features

- Ideal for handling and laying U shaped gutters, lids, edge stones, blocks.
- With clamp claw thickness of 9mm, the clearance between the materials can be easily set.
- By changing the toggle pins locations, the clamp range can be easily adjusted.
- The clamp claw teeth provide a firm grip that prevents slipping.
- The design of the clamp claws has been improved to prevent material corner from getting nicked during lifting.

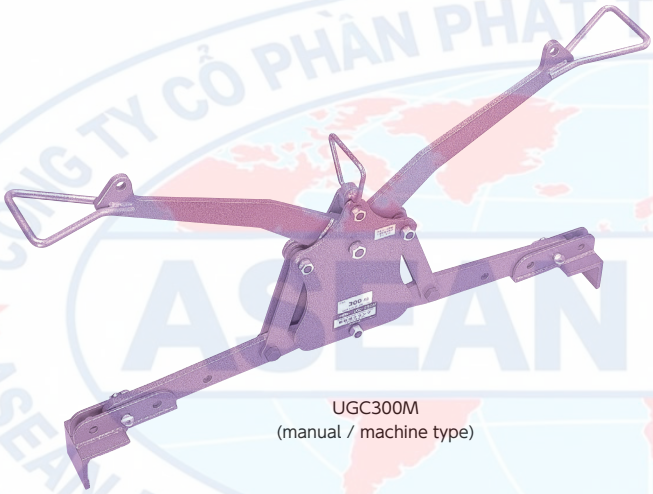

UGC300M
(manual / machine type)

▶ Example of use



Lifting with a crane
(UGC150M)

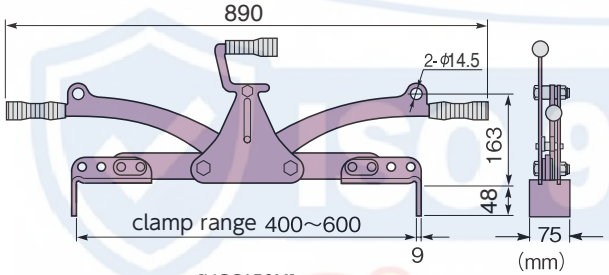

[UGC150M]



U shaped gutters can be clamped at both ends for easy handling and laying.



As the U shaped gutter is clamped from inside, the clamp doesn't interfere with the alignment levelling strings.

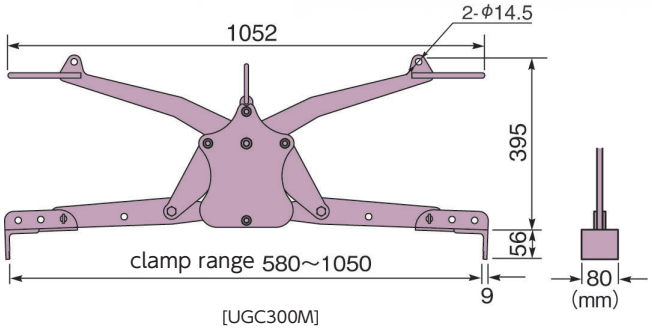

[UGC300M]

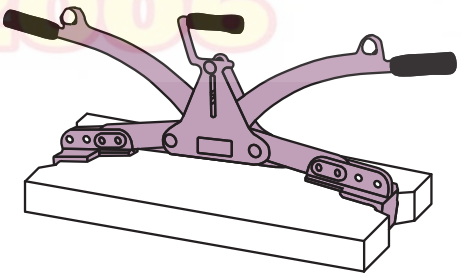

Ideal for lifting gutter lid.

Item No.	Rated capacity(kg)	Clamp range(mm)	N.W.(kg)
UGC150M	150	400～ 600	9
UGC300M	300	580～1050	17

 ★The product parts list and operation manual can be downloaded from our website.