

HSN

HS SOCKET

Square drive 9.5 mm 3/8" | Square drive 12.7 mm 1/2"


Features

- Insert the HSN socket to a ratchet wrench or a 60° slanted offset wrench to tighten bolts and nuts in confined or deep spaces.
- Nickel chrome plate finish.

Example of use



Item No.	Size name (mm)	Drive size(mm)		Size(mm)			N.W. (g)
		(Hexagon)	(Square)	L	L1	D	
HSN17	17	17	9.52(3/8)	53	22	24	80
HSN19	19	19	9.52(3/8)	53	23	26.5	100
HSN21	21	21	12.7(1/2)	58	24	29	130
HSN24	24	24	12.7(1/2)	58	27	33	150

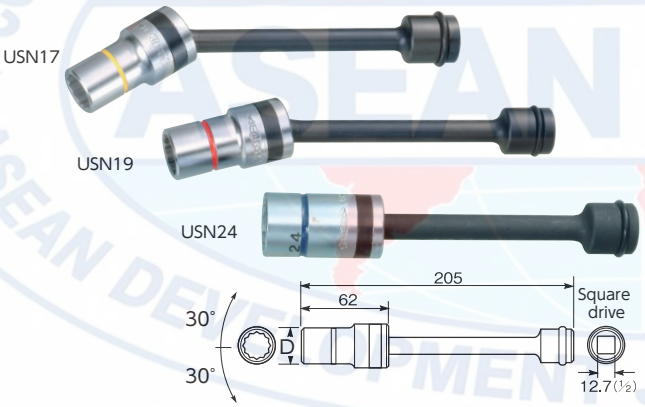

USN

UNI-SOCKET (for Impact Wrench)


Feature

- Optimal for use in confined or deep spaces when assembling steel structural housing.

Example of use



Item No.	Size name (mm)	Size(mm)	Applicable bolts and nuts		N.W. (g)
		D	Standard	Small	
USN17	17	25	M10	M12	380
USN19	19	27	M12	M14	390
USN24	24	34	M16	M18	510

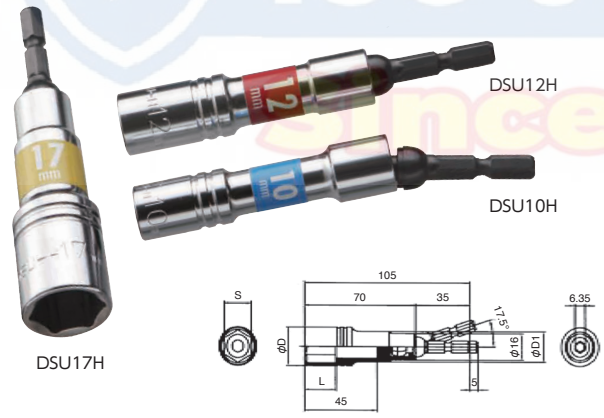

DSU-H

SOCKET BIT FOR ELECTRIC SCREWDRIVER (Universal Type)

Suits with 18V electric impact driver

Features

- 6pt. socket for heavy duty.
- Standard length type.
- Usable for both fix and angle type for bit part.
- Socket angle : 17.5°.
- Size can be identified with color.

Item No.	Seal color	Width across flats (S) (mm)	Size(mm)			N.W. (g)
			L	φD	φD1	
DSU7H	Light green	7	15	10.5	9.5	50
DSU8H	Black	8	15	12.7	10.5	60
DSU10H	Sky blue	10	15	15.0	12.0	70
DSU12H	Orange	12	20	17.5	14.0	80
DSU13H	Purple	13	20	17.9	14.0	80

Item No.	Seal color	Width across flats (S) (mm)	Size(mm)			N.W. (g)
			L	φD	φD1	
DSU14H	Green	14	20	19.7	16.0	90
DSU17H	Yellow	17	20	23.5	18.5	110
DSU19H	Red	19	20	26.0	20.5	120
DSU21H	Blue	21	20	28.5	22.5	150
DSU24H	Gold	24	20	33.0	25.0	180

●For all the appendix of the general hand tools & clamps, please refer to P.278~280