CS-A • CS-B
SNAP RING PLIERS (for Shaft Use)



CS0A


CS0B

▶ Features
- The phosphoric acid manganese film forming treatment of the alloy steel ensures excellent durability.
- The stainless steel grip area is designed to be light and easy to grip.


For shaft use

⬅ Open ➡



Claws type	Item No.	Size (mm)			N.W. (g)
		Claw tip dia.	Applicable range (stop ring size)	L	
Straight claws	**CS0A**	0.9	4~10	140	60
	CS1A	1.7	12~30	180	120
	CS3A	2.5	32~80	200	140
Bent claws	**CS0B**	0.9	4~10	130	60
	CS1B	1.7	12~30	172	120
	CS3B	2.5	32~80	192	140

CH-A • CH-B
SNAP RING PLIERS (for Hole Use)

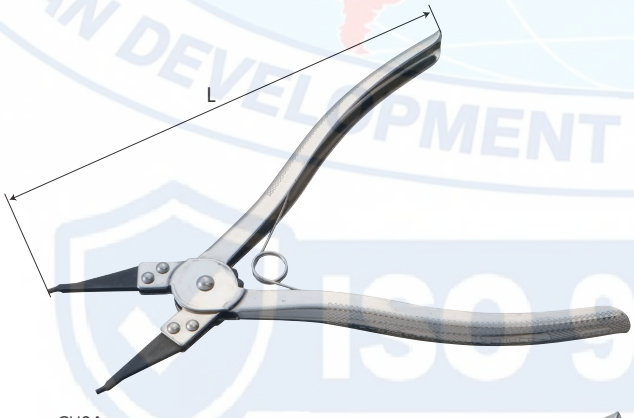

CH0A


CH0B

▶ Features
- The phosphoric acid manganese film forming treatment of the alloy steel ensures excellent durability.
- The stainless steel grip area is designed to be light and easy to grip.

For hole use

➡ Close ⬅



Claws type	Item No.	Size (mm)			N.W. (g)
		Claw tip dia.	Applicable range (stop ring size)	L	
Straight claws	**CH0A**	0.9	8~25	140	60
	CH1A	1.7	14~60	180	130
	CH4A	2.5	40~100	225	150
Bent claws	**CH0B**	0.9	8~25	130	60
	CH1B	1.7	14~60	168	130
	CH4B	2.5	40~100	212	150

●For all the appendix of the general hand tools & clamps, please refer to P.278~280