
TOGGLE CLAMP (Push / Pull Type)

TPPL50R • TPPL50L



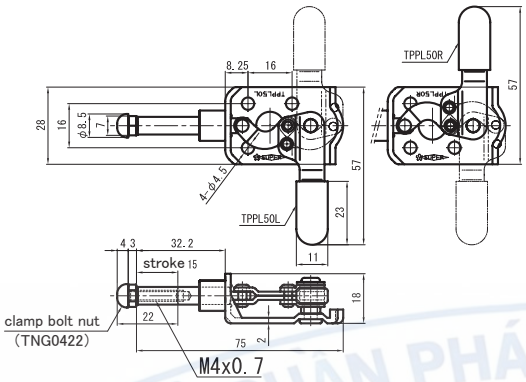


Item No.	Base type	N.W.(g)
TPPL50R	Flange	54
TPPL50L	Flange	54

- Max. holding capacity : 0.5kN
- Handle operation angle : 180°
- Stroke : 15mm
- Supporting pin : stainless steel


TOGGLE CLAMP (Latch Type)

TLA-F • STLA-F



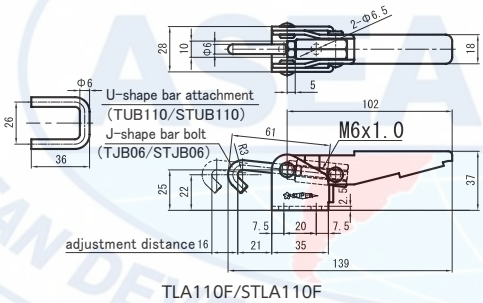

TLA110F/STLA110F

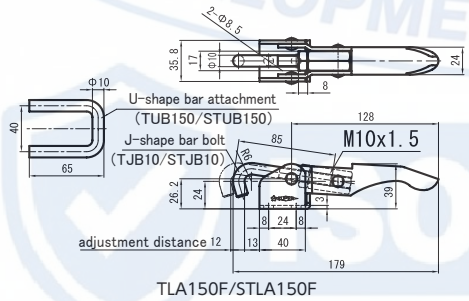


TLA150F/STLA150F


Item No.	Base type	N.W.(g)
TLA110F	Flange	205
STLA110F	Flange/stainless steel	205
TLA150F	Flange	454
STLA150F	Flange/stainless steel	454

TLA110F•STLA110F
- Max. holding capacity : 1.7kN
- Adjustment distance : 16mm
- Supporting pin : stainless steel


TLA150F•STLA150F
- Max. holding capacity : 3.0kN
- Adjustment distance : 12mm
- Supporting pin : stainless steel

TLA-F • STLA-F

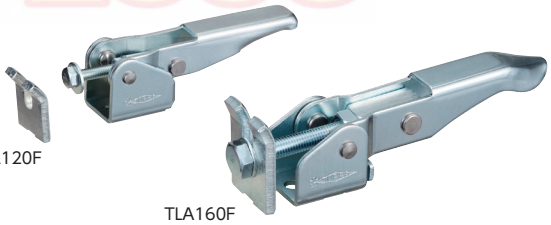

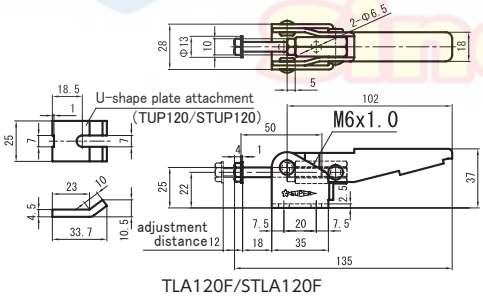

TLA120F/STLA120F

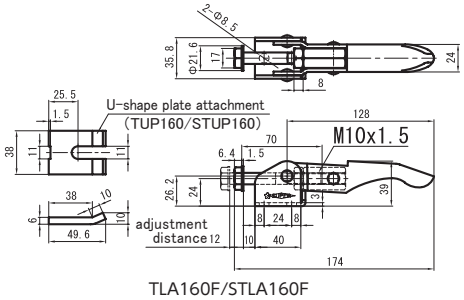

TLA160F/STLA160F

Item No.	Base type	N.W.(g)
TLA120F	Flange	210
STLA120F	Flange/stainless steel	210
TLA160F	Flange	420
STLA160F	Flange/stainless steel	420

TLA120F•STLA120F
- Max. holding capacity : 1.7kN
- Adjustment distance : 12mm
- Supporting pin : stainless steel

TLA160F•STLA160F
- Max. holding capacity : 3.0kN
- Adjustment distance : 12mm
- Supporting pin : stainless steel