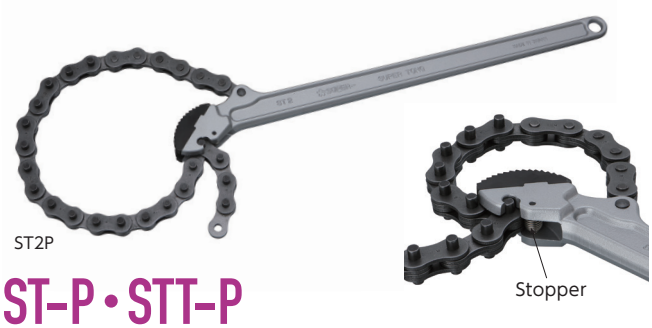


ST-P • STT-P


SUPER TONG, Chain Pipe Wrench Replaceable Heel Jaw Type (Heavy Duty Type for Professional Use)

▶ Features

- As a replaceable heel jaw teeth type, when the jaw teeth get worn, it can be replaced, so the tool can be used for a long time.
- Optimal for work in narrow places where pipe wrench cannot be used.
- Can work repeatedly with one-time setting (not for coated steel pipe).

Item No.	Applicable pipe		Body full length (mm)	N.W. (kg)
	Size name	External dia.(mm)		
ST1.5P	10A~100A	17~120	425	1.8
ST2P	20A~150A	25~170	510	2.6
ST2.5P	25A~200A	34~230	695	5.3

Stopper to prevent the chain from coming off included.
Chain links can be added up to twice the original chain length.



▮Heel Jaw Teeth (hex. socket head screw included)

Item No.	Applicable item
STT1.5P	ST1.5P
STT2P	ST2P
STT2.5P	ST2.5P



ST • ST-L

SUPER TONG, Chain Pipe Wrench (Heavy Duty Type for Professional Use)

▶ Features


- Optimal for work in narrow places where pipe wrench cannot be used.
- Can work repeatedly with one-time setting (not for coated steel pipe).
- For ST3, 3L and 4 it is possible to add pipes (sold separately) to the handle.

Item No.	Applicable pipe		Body full length (mm)	N.W. (kg)
	Size name	External dia.(mm)		
ST0	8A~40A	12~50	230	0.3
ST1	8A~80A	14~89	305	0.8
ST1L	8A~150A	14~170	305	1.1
ST1.5	10A~100A	17~120	425	1.8
ST2	20A~150A	25~170	510	2.6
ST2L	20A~200A	25~230	510	3.1
ST2.5	25A~200A	34~230	695	5.3
ST3	25A~250A	35~270	745	6.3
ST3L	25A~300A	35~320	745	6.6
ST4	50A~500A	60~510	745	10.5

For ST1.5 and above, stopper to prevent the chain from coming off included.
Chain links can be added up to twice the original chain length (except for ST1L, 2L and 3L).

STC • STC-L • STP • STH

SUPER TONG Parts

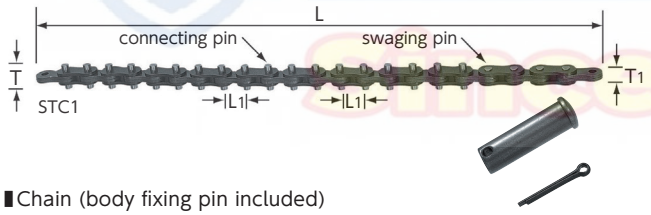

▮Chain (body fixing pin included)

Item No.	L (mm)	L1 (mm)	Total number of links	Number of swaging pins	Number of links linked to swaging pins	T (mm)	T1 (mm)
STC0	243	14.3(9/16)	17	4	5	14	7.2
STC1	438	19(3/4)	23	4	5	20	9.6
STC1L	667	19(3/4)	35	4	5	20	9.6
STC1.5	514	19(3/4)	27	4	5	20	9.6
STC2	685	25.4(1)	27	6	7	28	12.8
STC2L	838	25.4(1)	33	6	7	28	12.8
STC2.5	857	31.8(1 1/4)	27	6	7	40	16
STC3	984	31.8(1 1/4)	31	6	7	40	16
STC3L	1,111	31.8(1 1/4)	35	6	7	40	16
STC4	1,867	38.1(1 1/2)	49	6	7	50	19.2



▮Pin

Item No.	Applicable item
STP0	ST0
STP1	ST1・1L
STP1.5	ST1.5・1.5P
STP2	ST2・2L・2P
STP2.5	ST2.5・2.5P
STP3	ST3・3L
STP4	ST4



＊Only for ST3, 3L and 4.

▮Pipe (to connect to the body)

Item No.	Applicable item	Size(mm)			N.W. (kg)
		Full length	External dia.	Pipe thickness	
STH3	ST3・3L	1,000	43	5	4.5
STH4	ST4	1,500	45	5	7.5

●For all the appendix of the piping tools, please refer to P.283