YDS SWIVEL HOIST RING-S
YDSS旋转吊环

M8~M64
公制螺纹/M

0.5~32.5t
工作载荷/WLL


Rotation 360°
360°旋转

Pivot 180°
180°受力范围



- 不同受力角度均保证4倍安全系数
- 优质合金钢材质，专业锻造技术
- 规格齐全，并可满足定制需求
- 可追溯生产过程、原材料等信息
- 安装方便，螺栓顶部内外六角
- 螺栓防腐蚀设计，适用更多工况
- 符合DIN EN 1677-1标准
- 螺栓等级10.9
- 内置阻尼设计，有效保护被吊物
- 经过6g通止规检验，适用精密螺纹孔

- Safety factor: 4:1
- High-quality alloy steel material, professional forging technology
- The specifications are complete and can meet customized needs
- Traceable production process, raw materials, and so on
- Easy to install
- The bolt's anti-corrosion design works in more conditions
- Standard: DIN EN 1677-1
- Bolt grade: 10.9
- Built-in damping design
- Inspect with 6g go/no-go gauge

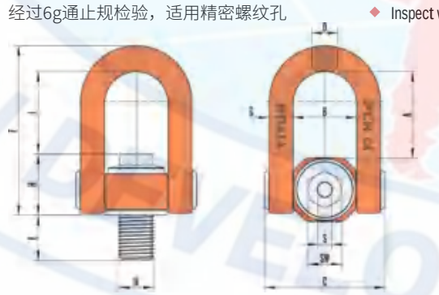

公制螺纹 | METRIC THREAD

产品编号 ITEM NO.	工作载荷 WLL/T	螺纹 M	尺寸参数 Dimensional Parameters / mm											锁紧扭矩 Locking Torque / Nm	净重 Kg
			E	A	B	C	D	F	G	H	I	S	SW		
YDSS-M8	0.5	M8×1.25	12	43	31	58	10	81.5	10	29	41	6	13	30	0.3
YDSS-M10	0.7	M10×1.5	16	43	31	58	10	81.5	10	29	41	6	13	50	0.3
YDSS-M12	1	M12×1.75	18	43	31	58	10	81.5	10	29	41	6	13	70	0.3
YDSS-M14	1.5	M14×2.0	21	53	36	69	13	100.5	12	39	48.5	8	19	100	0.6
YDSS-M16	2	M16×2.0	24	53	36	69	13	100.5	12	39	48.5	8	19	130	0.62
YDSS-M18	2.5	M18×2.5	40	74	54	105	19	145	20	50.5	73	10	27	170	1.9
YDSS-M20	3	M20×2.5	40	74	54	105	19	145	20	50.5	73	10	27	190	2.0
YDSS-M22	3	M22×2.5	40	74	54	105	19	145	20	50.5	73	10	27	190	2.0
YDSS-M24	4.5	M24×3.0	40	74	54	105	19	145	20	50.5	73	10	27	200	2.0
YDSS-M27	5	M27×3.0	40	92	68	133.5	27	182	26	67	87	14	34	260	4.3
YDSS-M30	7.3	M30×3.5	45	92	68	133.5	27	182	26	67	87	14	34	300	4.3
YDSS-M33	8	M33×3.5	50	92	68	133.5	27	182	26	67	87	14	34	320	4.4
YDSS-M36	12	M36×4.0	54	92	68	133.5	27	182	26	67	87	14	34	500	4.5

- 安全系数4 :1；螺栓长度、螺纹规格可以根据要求制作；“B”为大结构体，“S”为小结构体
  Safety factor: 4:1. Bolt length and thread specification can be customized according to requirements. "B" represents large structure, and "S" represents small structure

不得超过给定工作荷载极限
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT
WARNING | 警 告



起吊方式 Lifting method										
吊具肢数 Number	1	2	1	2	2		2	3-4		3-4
起吊角度 Angle	0°	0°	90°	90°	0-45°	45-60°	不对称 Asymmetry	0-45°	45-60°	不对称 Asymmetry
产品编号 ITEM NO.	螺纹 M	工作极限载荷 Working limit load / T								
YDSS-M8	M8×1.25	0.8	1.6	0.5	1	0.7	0.5	0.5	1.1	0.8	0.5
YDSS-M10	M10×1.5	1.2	2.4	0.7	1.4	1	0.7	0.7	1.5	1.1	0.7
YDSS-M12	M12×1.75	1.5	3	1	2	1.4	1	1	2.1	1.5	1
YDSS-M14	M14×2.0	2.4	4.8	1.5	3	2.1	1.5	1.5	3.2	2.3	1.5
YDSS-M16	M16×2.0	3.2	6.4	2	4	2.8	2	2	4.2	3	2
YDSS-M18	M18×2.5	4	8	2.5	5	3.5	2.5	2.5	5.3	3.8	2.5
YDSS-M20	M20×2.5	5	10	3	6	4.2	3	3	6.3	4.5	3
YDSS-M22	M22×2.5	6.4	12.8	3	6	4.2	3	3	6.3	4.5	3
YDSS-M24	M24×3.0	7.5	15	4.5	9	6.3	4.5	4.5	9.5	6.8	4.5
YDSS-M27	M27×3.0	9	18	5	10	7	5	5	10.5	7.5	5
YDSS-M30	M30×3.5	11	22	7.3	14.6	10.2	7.3	7.3	15.3	11	7.3
YDSS-M33	M33×3.5	13	26	10	20	14	10	10	21	15	10
YDSS-M36	M36×4.0	15	30	12	24	16.8	12	12	25.2	18	12

警 告 | WARNING
不得超过给定工作荷载极限
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT