SIDE LOAD LIFTING POINT
侧拉旋转吊环

M8~M64
公制螺纹/M


0.3~22.5t
工作载荷/WLL

Rotation 360°
360°旋转

Pivot 180°
180°受力范围



- 不同受力角度均保证4倍安全系数 — Safety factor: 4:1
- 优质合金钢材质，专业锻造技术 — High-quality alloy steel material, professional forging technology
- 规格齐全，并可满足定制需求 — The specifications are complete and can meet customized needs
- 可追溯生产过程、原材料等信息 — Traceable production process, raw materials, and so on
- 安装方便，螺栓顶部内外六角 — Easy to install
- 螺栓防腐蚀设计，适用更多工况 — The bolt's anti-corrosion design works in more conditions
- 符合DIN EN 1677-1标准 — Standard: DIN EN 1677-1
- 螺栓等级10.9 — Bolt grade: 10.9
- 内置定位卡簧，有效保护被吊物 — Built-in positioning circlip
- 经过6g通止规检验，适用精密螺纹孔 — Inspect with 6g go/no-go gauge

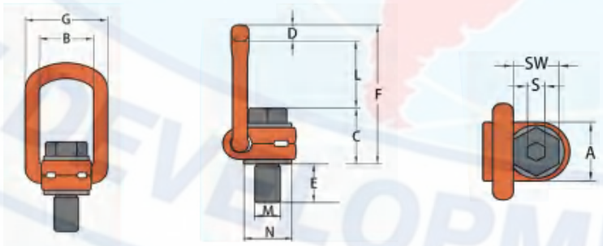


公制螺纹 | METRIC THREAD

产品编号 ITEM NO.	工作载荷 WLL/T	螺纹 M	尺寸参数 Dimensional Parameters / mm											锁紧扭矩 Locking Torque / Nm	净重 Kg
			E	A	B	C	D	F	G	L	N	S	SW		
YD081-M8	0.3	M8×1.25	11	34	37	42	14	98.5	57	42.5	31	6	13	10-40	0.5
YD081-M10	0.63	M10×1.5	16	34	37	44	14	98.5	57	40.5	31	6	16	10-40	0.5
YD081-M12	1	M12×1.75	18	34	37	45	14	98.5	57	39.5	31	8	18	15-40	0.5
YD081-M14	1.2	M14×2.0	21	34	37	48	14	98.5	57	36.5	31	10	24	30-100	0.5
YD081-M16	1.5	M16×2.0	24	34	37	48	14	98.5	57	36.5	31	10	24	45-130	0.5
YD081-M18	2	M18×2.5	26	50	54	58	16.5	143	82	68.5	45	12	30	100-170	1.3
YD081-M20	2.5	M20×2.5	30	50	54	58	16.5	143	82	68.5	45	12	30	100-170	1.3
YD081-M22	3	M22×2.5	30	50	54	61	16.5	143	82	65.5	45	14	36	100-170	1.4
YD081-M24	4	M24×3.0	36	50	54	61	16.5	143	82	65.5	45	14	36	190-280	1.4
YD081-M27	4	M27×3.0	38	60	65	82	22	170	99	66	59	17	46	250-500	3
YD081-M30	5	M30×3.5	48	60	65	82	22	170	99	66	59	17	46	270-600	3
YD081-M33	6	M33×3.5	54	60	65	85	22	170	99	63	59.5	22	55	270-600	3
YD081-M36S	7	M36×4.0	54	60	65	85	22	170	99	63	59.5	22	55	270-600	3.2
YD081-M36B	8	M36×4.0	62	77	85	104	27	226.5	123	95.5	69	22	55	270-600	6
YD081-M39	8	M39×4.0	62	77	85	104	27	226.5	123	95.5	69	22	55	350-800	6

- 安全系数4 :1；螺栓长度、螺纹规格可以根据要求制作；“B”为大结构体，“S”为小结构体
  Safety factor: 4:1. Bolt length and thread specification can be customized according to requirements. "B" represents large structure, and "S" represents small structure

不得超过给定工作荷载极限 NEVER EXCEED PUBLISHED WORKING LOAD LIMIT
WARNING | 警 告

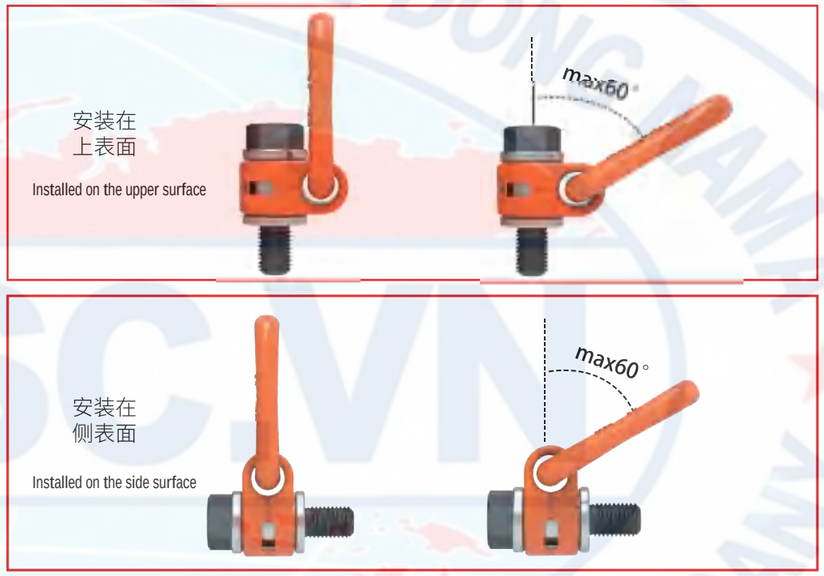

起吊方式 Lifting method											
吊具肢数 Number	1	2	1	2	2		2	3-4		3-4	
起吊角度 Angle	0°	0°	90°	90°	0-45°	45-60°	不对称 Asymmetry	0-45°	45-60°	不对称 Asymmetry	
产品编号 ITEM NO.	螺纹 M	工作极限载荷 Working limit load / T									
YD081-M8	M8×1.25	0.3	0.6	0.3	0.6	0.42	0.3	0.3	0.63	0.45	0.3
YD081-M10	M10×1.5	0.63	1.26	0.63	1.26	0.88	0.63	0.63	1.32	0.95	0.63
YD081-M12	M12×1.75	1	2	1	2	1.4	1	1	2.1	1.5	1
YD081-M14	M14×2.0	1.2	2.4	1.2	2.4	1.7	1.2	1.2	2.5	1.8	1.2
YD081-M16	M16×2.0	1.5	3	1.5	3	2.1	1.5	1.5	3.1	2.2	1.5
YD081-M18	M18×2.5	2	4	2	4	2.8	2	2	4.2	3	2
YD081-M20	M20×2.5	2.5	5	2.5	5	3.5	2.5	2.5	5.2	3.7	2.5
YD081-M22	M22×2.5	3	6	3	6	4.2	3	3	6.3	4.5	3
YD081-M24	M24×3.0	4	8	4	8	5.6	4	4	8.4	6	4
YD081-M27	M27×3.0	4	8	4	8	5.6	4	4	8.4	6	4
YD081-M30	M30×3.5	5	10	5	10	7	5	5	10.5	7.5	5
YD081-M33	M33×3.5	6	12	6	12	8.5	6	6	12.7	9	6
YD081-M36S	M36×4.0	7	14	7	14	9.8	7	7	14.7	10.5	7
YD081-M36B	M36×4.0	8	16	8	16	11.2	8	8	16.8	12	8
YD081-M39	M39×4.0	8	16	8	16	11.2	8	8	16.8	12	8

警 告 | WARNING
不得超过给定工作荷载极限 NEVER EXCEED PUBLISHED WORKING LOAD LIMIT