
FALL PROTECTION ANCHORAGE POINT
防坠落固定吊点



- 双相不锈钢材质 / Duplex stainless steel material
- 具有良好的耐腐蚀性和力学性能 / It has good corrosion resistance and mechanical properties
- 规格齐全，并可满足定制需求 / The specifications are complete and can meet customized needs
- 可追溯生产过程、原材料等信息 / Traceable production process, raw materials, and so on
- 安装方便，螺栓顶部内外六角 / Easy to install
- 在海洋环境或高氯离子环境中具有长期稳定性 / It exhibits long-term stability in marine environments or high chloride ion environments
- 根据EN795和TS16415标准测试和制造 / Tested and manufactured according to EN795 and TS16415 standards
- 作为防坠落锚点使用，保障高空作业安全 / Used as a fall protection anchor point
- 适用长期户外环境 / Suitable for long-term outdoor use

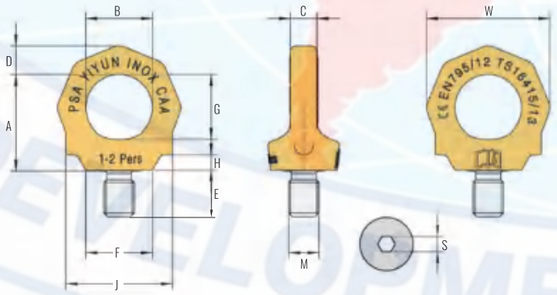

公制螺纹 | METRIC THREAD

产品编号 ITEM NO.	螺纹 M	荷载人数 Pers	尺寸参数 Dimensional Parameters / mm											锁紧扭矩 Locking Torque / Nm	净重 Kg
			A	B	C	D	E	F	G	H	J	S	W		
PSA INOX-M12	M12×1.75	1Pers	42	30	10	13	18	33	29	7	48	8	55	10	0.2
PSA INOX-M16	M16×2.0	1-2Pers	51	35	14	15	24	35	34	8	56	8	65	30	0.35
PSA INOX-M20	M20×2.5	1-2Pers	57.5	40	17	19	30	43	37	9.5	68	12	78	70	0.6
PSA INOX-M12 L-50	M12×1.75	1Pers	42	30	10	13	50	33	29	7	48	8	55	10	0.22
PSA INOX-M16 L-50	M16×2.0	1-2Pers	51	35	14	15	50	35	34	8	56	8	65	30	0.48
PSA INOX-M16 L-120	M16×2.0	1-2Pers	51	35	14	15	120	35	34	8	56	8	65	30	0.56
PSA INOX-M20 L-60	M20×2.5	1-2Pers	57.5	40	17	19	60	43	37	9.5	68	12	78	70	0.63

美制螺纹 | UNC THREAD

产品编号 ITEM NO.	螺纹 UNC	荷载人数 Pers	尺寸参数 Dimensional Parameters / mm											锁紧扭矩 Locking Torque / Nm	净重 Kg
			A	B	C	D	E	F	G	H	J	S	W		
PSA INOX-1/2	1/2-13UNC-2A	1Pers	42.0	30	10	13	18	33	29	7	48	8	55	10	0.2
PSA INOX-5/8	5/8-11UNC-2A	1-2Pers	51.0	35	14	15	24	35	34	8	56	8	65	30	0.4
PSA INOX-3/4	3/4-10UNC-2A	1-2Pers	57.5	40	17	19	30	43	37	10	68	12	78	70	0.6

- 安全系数4 :1；螺栓长度、螺纹规格可以根据要求制作
  Safety factor: 4:1. Bolt length and thread specification can be customized according to requirements.

不得超过给定工作荷载极限 NEVER EXCEED PUBLISHED WORKING LOAD LIMIT **WARNING | 警 告**

YiYUN



警 告 | WARNING 不得超过给定工作荷载极限 NEVER EXCEED PUBLISHED WORKING LOAD LIMIT