




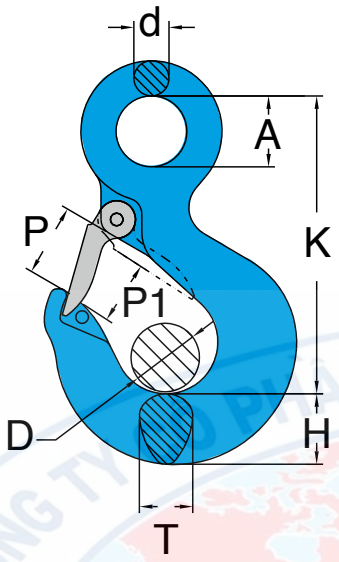

Digital Chip embedded

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- Quenched and Tempered Alloy Steel.
- At least 25% greater WLL than traditional G80 products.
- Manufactured in accordance with EN 1677- 2 and ASME B30.26.
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured.
- Design Factor 4:1.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Tempering temperature minimum 400°C
- Magnaflux crack detection is performed 100% on each batch.

G-100 Eye Hook

Item NO.	Hook Feature Code	For Grade 100 Chain	Working Load Limit	Dimensions (mm)								N.W.
		mm	tonnes	A	D	d	H	K	P	P1	T	kg
X-173-05	AA	5	1.0	23	22	10	19	83	26	22	15	0.3
X-173-06	BB	6	1.4	23	19	11	21	95	26	19	17	0.4
X-173-07	CC	7,8	2.5	29	20	13	26	106	28	20	21	0.7
X-173-10	DD	10	4.0	32	25	15	29	122	31	25	24	0.9
X-173-13	EE	13	6.7	40	31	18	37	149	37	31	31	2.0
X-173-16	FF	16	10.0	51	39	24	47	192	46	39	37	4.0
X-173-20	GG	20	16.0	62	57	28	58	232	61	57	48	7.0
X-173-22	HH	22	19.0	72	62	32	66	256	68	62	56	9.4
X-173-26	JJ	26	26.5	90	81	40	76	318	92	81	68	18.7
X-173-32	KK	32	40.0	90	83	45	93	357	89	83	76	31.3

* Design factor 4:1 proof tested and certified.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT