



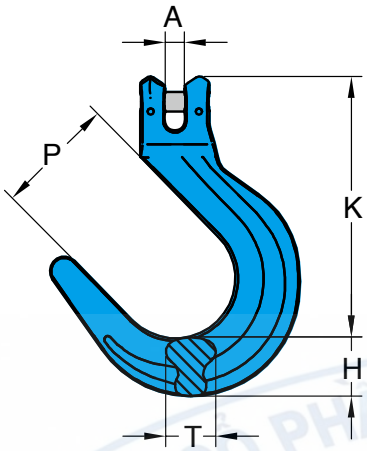

- Quenched and Tempered Alloy Steel.
- At least 25% greater WLL than traditional G80 products.
- Manufactured in accordance with DIN PAS 1061 and ASTM A952/A 952M,EN 1677- 1.
- Certified by DGUV GS-OA-15-05
- Design Factor 4:1.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Tempering temperature minimum 400°C
- Designed for the assembly of chain slings where wide throat openings are necessary.
- Before using the hook, check whether hooks without safety latches are allowed to be used for the particular application.

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

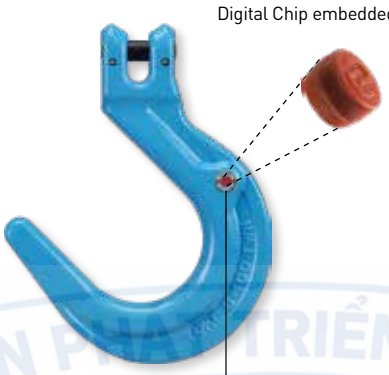

G-100 Clevis Foundry Hook

Item No.	For Grade 100 Chain	Working Load Limit	Dimensions (mm)					N.W.
	mm	tonnes*	A	H	K	P	T	kg
X-046-07	7, 8	2.5	10	30	133	62	20	0.95
X-046-10	10	4.0	12	35	162	74	29	1.80
X-046-13	13	6.7	15	39	180	88	32	3.60
X-046-16	16	10.0	18	46	216	101	41	6.40
X-046-20	20	16.0	24	59	279	116	57	11.20

* Design factor 4:1 proof tested and certified.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT