


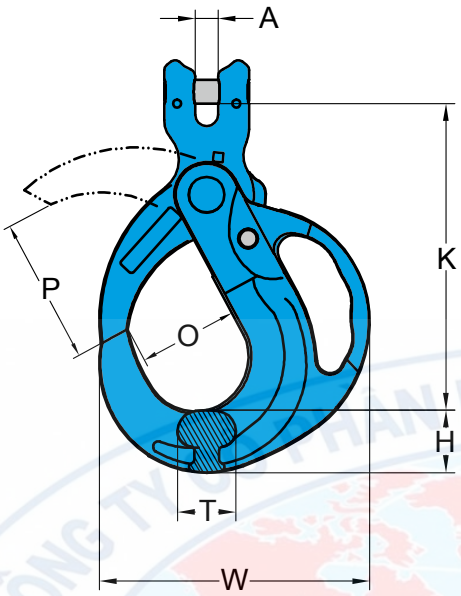

Digital Chip embedded

- Quenched and Tempered Alloy Steel.
- Manufactured in accordance with EN 1677- 3.
- Manufactured in accordance with ASTM A952/ A952M, DIN PAS 1061.
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Tempering temperature minimum 400°C
- Magnaflux crack detection is performed 100% on each batch.

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

G-100 Clevis Grip Safe Locking Hook

Item No.	For Grade 100 Chain	Working Load Limit	Dimensions (mm)							N.W.
	mm	tonnes*	A	H	K	O	P	T	W	kg
X-951-10	10	4.0	12	31	153	49	46	27	137	1.9
X-951-13	13	6.7	15	39	203	64	80	34	174	4.1
X-951-16	16	10.0	18	47	244	78	114	39	212	7.1
X-951-20	20	16.0	24	55	312	92	127	54	251	12.7
X-951-22	22	19.0	24	59	304	98	151	56	258	14.1

* Design factor 4:1 proof tested and certified

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT