



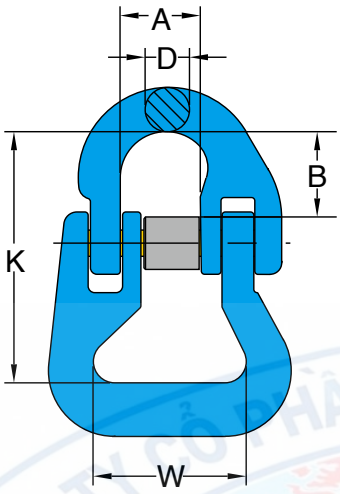

- Quenched and Tempered Alloy Steel.
- At least 25% greater WLL than traditional G80 products.
- Manufactured in accordance with EN 1677- 1, PAS1061 and ASME B30.26.
- Certified by DGUV GS-OA-15-05.
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured.
- Design Factor 4:1.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Tempering temperature minimum 400°C
- Magnaflux crack detection is performed 100% on each batch.

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

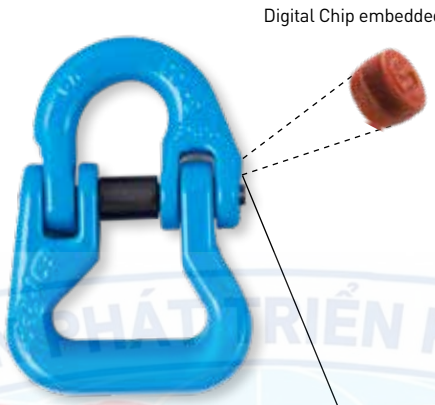

G-100 Web Sling Connector

Item No.	For Grade 100 Chain	Working Load Limit	Dimensions (mm)					N.W.
	mm	tonnes*	A	B	D	K	W	kg
X-016-06	6	1.4	15	17	7	56	39	0.2
X-016-07	7, 8	2.5	18	23	9	63	39	0.3
X-016-10	10	4.0	25	27	11	77	46	0.6
X-016-13	13	6.7	30	37	16	97	53	1.1
X-016-16	16	10.0	36	39	19	114	66	2.0
X-016-20	20	16.0	42	46	23	132	79	3.2
X-016-22	22	19.0	49	59	24	188	124	7.7

* Design factor 4:1 proof tested and certified

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT