
Eye Self Locking Hook.

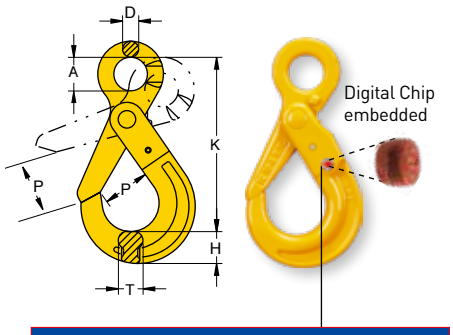


Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Item No.	For Grade 80 Chain	Working Load Limit	Dimensions (mm)						N.W.
	mm	tonnes*	A	D	H	K	P	T	kg
8-025-06	6	1.12	21	10	19	110	28	15	0.5
8-025-07	7, 8	2.00	25	11	24	136	34	20	0.8
8-025-10	10	3.15	33	13	30	167	44	26	1.4
8-025-13	13	5.30	40	16	39	207	51	30	3.0
8-025-16	16	8.00	50	21	49	252	61	36	5.8
8-025-20	18, 20	12.50	62	23	62	281	91	48	8.5
8-025-22	22	15.00	70	24	63	319	80	49	12.5
8-025-26	26	21.20	80	25	69	343	99	56	14.0
8-025-28	28	25.00	92	28	81	405	123	63	26.0

* Design factor 4:1 proof tested and certified

Tested acc. to EN 1677

Clevis Self Locking Hook.

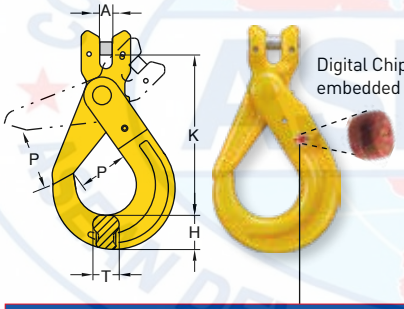

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).


Item No.	For Grade 80 Chain	Working Load Limit	Dimensions (mm)					N.W.
	mm	tonnes*	A	H	K	P	T	kg
8-026-06	6	1.12	7	19	93	28	15	0.5
8-026-07	7, 8	2.00	9	24	119	34	20	0.8
8-026-10	10	3.15	12	30	143	44	26	1.4
8-026-13	13	5.30	15	39	179	51	30	2.9
8-026-16	16	8.00	18	49	212	61	36	5.6
8-026-20	18, 20	12.50	21	62	243	91	48	9.0
8-026-22	22	15.00	24	63	273	80	49	13.0

* Design factor 4:1 proof tested and certified

Tested acc. to EN 1677

Swivel Self Locking Hook.

with Brass Bushing

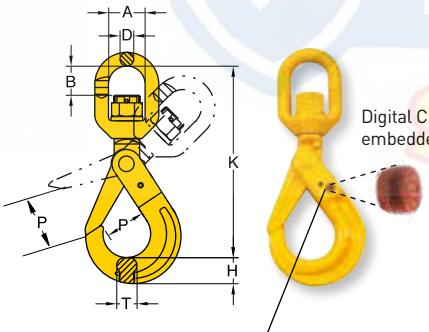

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Item No.	For Grade 80 Chain	Working Load Limit	Dimensions (mm)								N.W.
	mm	tonnes*	A	B	D	H	K	P	T		kg
8-027-06	6	1.12	32	25	12	19	149	28	15		0.7
8-027-07	7, 8	2.00	36	30	14	24	186	34	20		1.2
8-027-10	10	3.15	41	38	16	30	218	44	26		2.0
8-027-13	13	5.30	46	48	22	39	276	51	30		4.1
8-027-16	16	8.00	61	56	24	49	329	61	36		7.2
8-027-20	18, 20	12.50	74	86	26	62	403	91	48		11.5
8-027-22	22	15.00	97	98	33	63	457	80	49		18.6
8-027-26	26	21.20	123	120	52	69	535	99	56		31.9

* Design factor 4:1 proof tested and certified

Tested acc. to EN 1677

⚠ WARNING INFORMATION: WARNING INFORMATION: This hook is a positioning device and is not intended to rotate under load. For swivel hooks designed to rotate under load, see 8-027N .

⚠ WARNING

NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.