
Eye Grab Hook.

Not for use with Omega Link Item. 8-018
No reduction of working load limit, thanks to supporting wings which prevent chain link deformation.

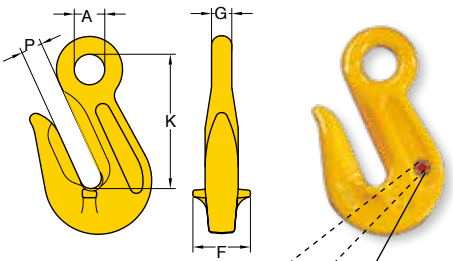


Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Item No.	For Grade 80 Chain	Working Load Limit	Dimensions (mm)					N.W.
	mm	tonnes*	A	F	G	K	P	kg
8-041-06	6	1.12	13	26	8	51	8	0.2
8-041-07	7, 8	2.00	15	30	9	62	10	0.3
8-041-10	10	3.15	20	40	13	82	13	0.6
8-041-13	13	5.30	26	52	16	107	16	1.4
8-041-16	16	8.00	30	70	20	132	22	2.3
8-041-20	18, 20	12.50	38	73	24	147	24	3.9
8-041-22	22	15.00	42	86	26	166	26	4.7
8-041-26	26	21.20	50	110	32	207	30	9.9
8-041-32	32	31.50	61	127	41	269	37	21.4

* Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677

Clevis Grab Hook.

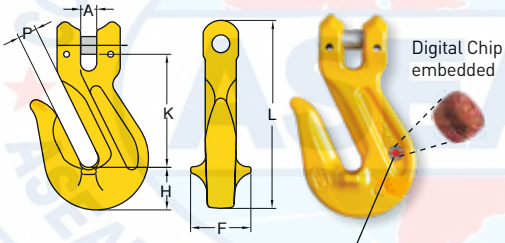


Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Item No.	For Grade 80 Chain	Working Load Limit	Dimensions (mm)						N.W.
	mm	tonnes*	A	F	H	K	L	P	kg
8-042-06	6	1.12	7	25	17	47	79	8	0.2
8-042-07	7, 8	2.00	9	30	21	54	93	10	0.3
8-042-10	10	3.15	12	41	29	77	128	13	0.8
8-042-13	13	5.30	15	52	37	99	165	16	1.6
8-042-16	16	8.00	18	57	45	114	195	20	2.8
8-042-20	18, 20	12.50	21	73	52	130	222	23	4.8

* Design factor 4:1 proof tested and certified.
Tested acc. to EN 1677

Clevis C Hook.

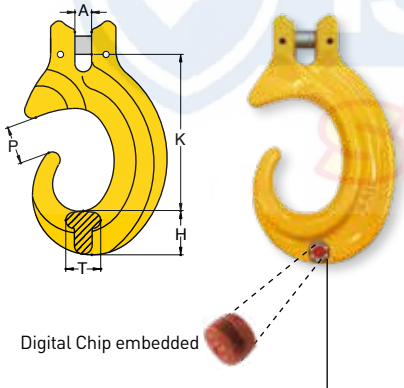

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Item No.	For Grade 80 Chain	Working Load Limit	Dimensions (mm)					N.W.
	mm	tonnes*	A	H	K	P	T	kg
8-097-07	7, 8	2.00	9	22	80	19	18	0.5
8-097-10	10	3.15	11	26	105	26	24	0.9
8-097-13	13	5.30	14	34	138	34	32	2.1
8-097-16	16	8.00	18	45	170	38	37	3.8

* Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT