
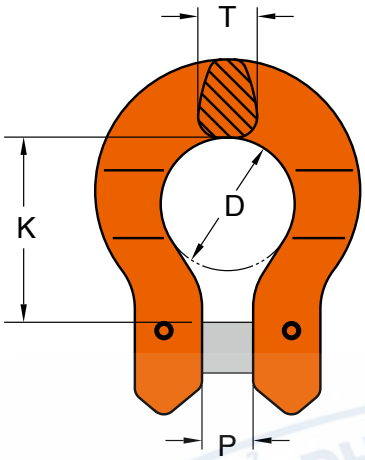


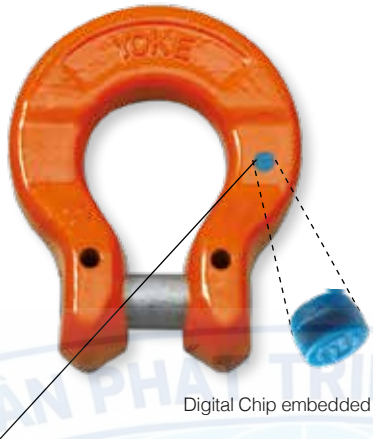

Digital Chip embedded

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- Forged alloy steel quenched and tempered.
- Tested and manufactured in accordance with DNV-ST-E271, DNV-ST-E273 and EN 1677-1.
- Charpy tested in accordance with DNV-ST-E271.
- Certified by DNV-ST-E271 and DNV-ST-E273.
- Design factor 4:1.
- Proof Load tested to 2.5 times the Working Load Limit (WLL).
- Fatigue rated to 20,000 cycles at 1.5 times the Working Load Limit (WLL).
- Magnaflux crack detection is performed 100% on each batch.
- Charpy test of 42 joules (31ft-lb) at -20°C (-4°F).

DA Omega Link

DNV-ST-E271
(Offshore Containers)
DNV-ST-E273
(Portable Offshore Units)

-20°C

Item No.	For Grade 80 Chain	Working Load Limit	Dimensions (mm)				N.W.
	mm	tonnes	D	K	P	T	kg
DA-018-06	6	1.12	21	29	7	9	0.1
DA-018-07	7,8	2.00	27	36	9	11	0.2
DA-018-10	10	3.15	32	44	12	15	0.4
DA-018-13	13	5.30	42	55	16	17	0.8
DA-018-16	16	8.00	50	69	18	22	1.6
DA-018-20	18,20	12.50	58	83	22	28	2.1

* Design Factor 4:1

ASEAN JSC.VN
ASEAN DEVELOPMENT JOINT STOCK COMPANY
CÔNG TY CỔ PHẦN PHÁT TRIỂN KINH TẾ ĐÔNG NAM Á
ISO 9001:2015
Since 2006

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.