
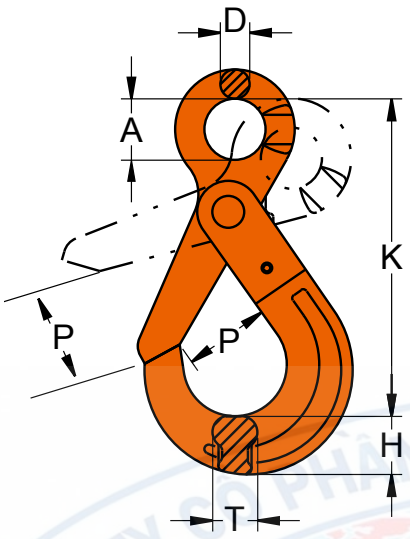


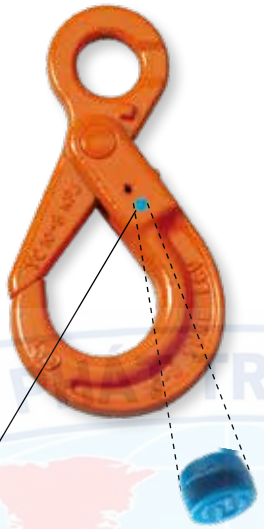

Digital Chip embedded

- Forged alloy steel quenched and tempered.
- Tested and manufactured in accordance with DNV-ST-0378 and EN 1677-3.
- Charpy tested in accordance with DNV-ST-0378.
- Certified by DNV-ST-0378.
- Design factor 4:1 and 5:1.
- Proof Load tested to 2.5 times the Working Load Limit (WLL at Design factor 4:1).
- Fatigue rated to 20,000 cycles at 1.5 times the Working Load Limit (WLL at Design factor 4:1).
- Magnaflux crack detection is performed 100% on each batch.
- Charpy test of 42 joules (31ft-lb) at -20°C (-4°F).
- Designed with recessed trigger, providing the locking mechanism being protected against inadvertent opening due to entanglement with any obstruction during lifting.
- Latch mechanism is self-locking under loading.

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

DA Eye Self Locking Hook

DNV-ST-0378
(Offshore and Platform Lifting Appliance)

-20°C

Item No.	Working Load Limit tonnes 5:1	Working Load Limit tonnes 4:1	Dimensions (mm) A	D	H	K	P	T	N.W. kg
DA-025-13	5.3	6.7	40	16	39	207	52	30	3.0
DA-025-16	8.0	10.0	50	21	49	252	60	36	5.8
DA-025-20	12.8	16.0	61	23	65	293	70	48	10.0
DA-025-22	15.2	19.0	70	24	63	319	80	49	12.5
DA-025-26	21.2	26.5	80	25	69	343	99	56	14.7
DA-025-32	25.2	31.5	90	28	81	401	120	63	26.0

* Design factor 4:1 and 5:1

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT