
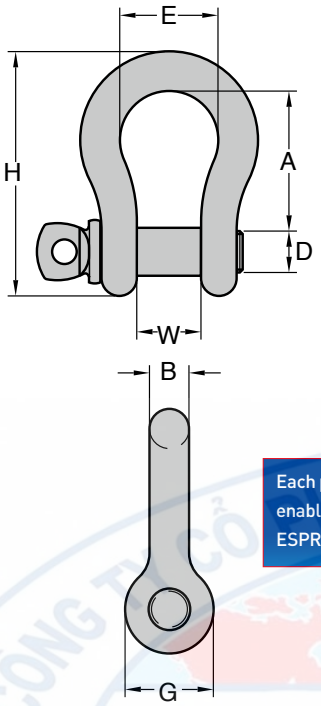


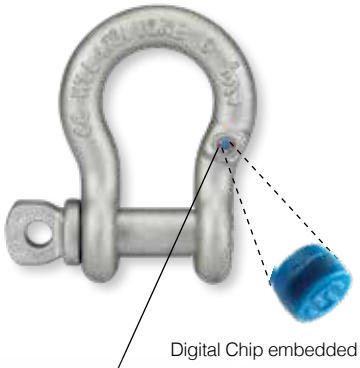

Digital Chip embedded

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- Shackles are forged carbon steel with alloy pin, quenched and tempered.
- Meet the performance requirements of US Federal Specification RR-C-271, Type IVA, Grade A, Class 2.
- Shackles are Type Approved by CE & UKCA.
- Size and the Working Load Limit permanently shown on each shackle.
- All shackles with Traceability Code which links to Test Certificate and quality traceability.
- Proof tested to 2 times the WLL.
- Design factor 6:1
- 20,000 cycle fatigue rated to 1.5 times Working Load Limit.
- 100% magnaflux crack detection during manufacturing.
- Hot dip galvanized.

YOKE 8-837 Screw Pin Type Anchor Shackles meet the performance requirements of US Federal Specification RR-C-271, Type IVA, Grade A, Class 2.

Forged Anchor Shackle

with Screw Pin, Carbon Steel

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)							N.W.
	mm	tonnes*	A	B	D	E	G	H	W	kg
8-837-06	6	0.50	28	6.5	8.0	20	16	47	12	0.05
8-837-08	8	0.75	31	8.0	9.5	21	19	54	12	0.10
8-837-10	10	1.00	36	10.0	11.0	26	23	65	16	0.10
8-837-11	11	1.50	43	11.0	13.0	30	27	75	19	0.20
8-837-13	13	2.00	47	13.0	16.0	33	30	85	20	0.30
8-837-16	16	3.25	61	16.0	19.0	43	38	106	27	0.60
8-837-19	19	4.75	72	19.0	22.0	50	46	126	33	1.00
8-837-22	22	6.50	86	22.0	26.0	58	53	148	38	1.50
8-837-26	26	8.50	96	26.0	28.0	69	61	166	44	2.30
8-837-28	28	9.50	111	28.0	32.0	74	68	190	46	3.20
8-837-32	32	12.00	121	32.0	36.0	84	76	210	54	4.50
8-837-36	36	13.50	134	36.0	38.0	92	84	232	59	6.30
8-837-38	38	17.00	146	38.0	42.0	99	92	254	60	8.10
8-837-45	45	25.00	178	47.0	51.0	127	106	313	73	16.30
8-837-50	50	35.00	197	53.0	57.0	146	122	347	83	23.20

* Minimum Ultimate Load is 6 times the Working Load Limit.
* Maximun Proof Load is 2 times the Working Load Limit.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT