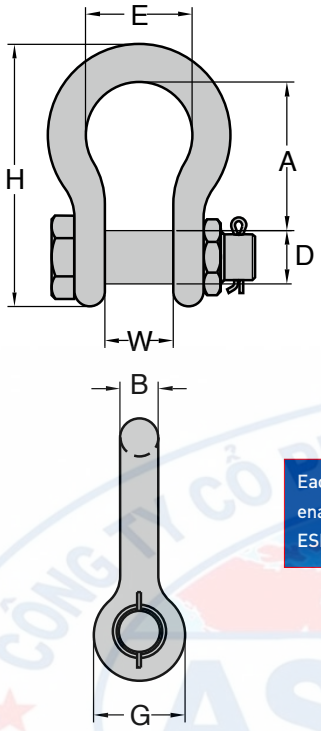
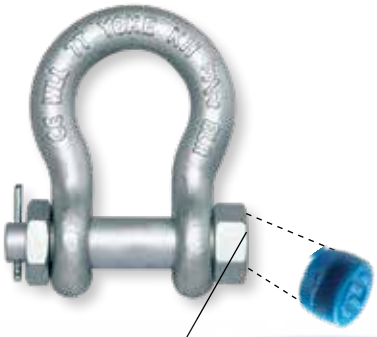


Digital Chip embedded

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

- Shackles are forged carbon steel with alloy pin, quenched and tempered.
- Meet the performance requirements of US Federal Specification RR-C-271, Type IVA, Grade B, Class 3.
- Shackles are Type Approved by CE & UKCA.
- Size and the Working Load Limit permanently shown on each shackle.
- All shackles with Traceability Code which links to Test Certificate and quality traceability.
- Proof tested to 2 times the WLL.
- Design factor 5:1.
- 20,000 cycle fatigue rated to 1.5 times Working Load Limit.
- 100% magnaflux crack detection during manufacturing.
- Hot dip galvanized.

YOKE 8-808 Bolt,nut,and Cotter Type Anchor Shackles meet the performance requirements of US Federal Specification RR-C-271, Type IVA, Grade B, Class 3.

# Forged Alloy Anchor Shackle

with Bolt, nut, and Cotter

| Item No. | Nominal Size | Working Load Limit | Dimensions (mm) | | | | | | | N.W. |
|---|---|---|---|---|---|---|---|---|---|---|
| | mm | tonnes* | A | B | D | E | G | H | W | kg |
| 8-808-08 | 8 | 1.2 | 31 | 8 | 10 | 21 | 19 | 54 | 12 | 0.1 |
| 8-808-10 | 10 | 2.0 | 36 | 10 | 11 | 26 | 23 | 65 | 16 | 0.1 |
| 8-808-11 | 11 | 2.7 | 43 | 11 | 13 | 30 | 27 | 75 | 19 | 0.2 |
| 8-808-13 | 13 | 3.3 | 47 | 13 | 16 | 33 | 30 | 85 | 20 | 0.3 |
| 8-808-16 | 16 | 5.0 | 61 | 16 | 19 | 43 | 38 | 106 | 27 | 0.7 |
| 8-808-19 | 19 | 7.0 | 72 | 19 | 22 | 50 | 46 | 126 | 33 | 1.0 |
| 8-808-22 | 22 | 9.5 | 86 | 22 | 26 | 58 | 53 | 148 | 38 | 1.7 |
| 8-808-26 | 26 | 12.5 | 96 | 26 | 28 | 69 | 61 | 166 | 44 | 2.4 |
| 8-808-28 | 28 | 15.0 | 111 | 28 | 32 | 74 | 68 | 190 | 46 | 3.4 |
| 8-808-32 | 32 | 18.0 | 121 | 32 | 36 | 84 | 76 | 210 | 54 | 4.8 |
| 8-808-36 | 36 | 21.0 | 134 | 36 | 38 | 92 | 84 | 232 | 59 | 6.5 |
| 8-808-38 | 38 | 30.0 | 146 | 38 | 42 | 99 | 92 | 254 | 60 | 8.8 |
| 8-808-45 | 45 | 40.0 | 178 | 47 | 51 | 127 | 106 | 313 | 73 | 17.5 |
| 8-808-50 | 50 | 55.0 | 197 | 53 | 57 | 146 | 122 | 347 | 83 | 24.2 |

* Minimum Ultimate Load is 5 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.

**WARNING**
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT



Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.