


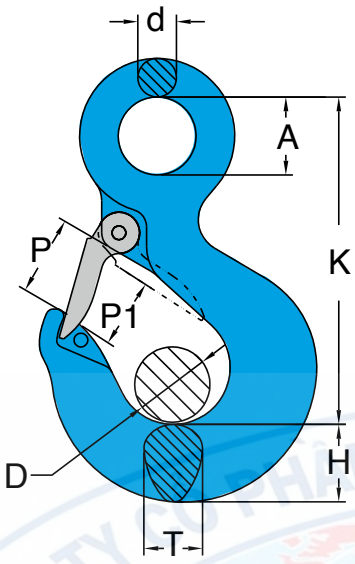

Digital Chip embedded

- Quenched and Tempered Alloy Steel.
- Proof Load tested at 2 times of 5:1 WLL with certification for each batch manufactured.
- Fatigue rated to 20,000 cycles at 1.5 times of 5:1 WLL.
- Magnaflux crack detection is performed 100% on each batch.
- YOKE Eye Hoist Hooks are Predrilled to accept a YOKE latch kits.

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Alloy Eye Hoist Hook

with Latch

Item No.	Hook Feature Code	Working Load Limit	Dimensions (mm)								N.W.
		tonnes*	A	D	d	H	K	P	P1	T	kg
8-173-01	AA	1.0	23	22	10	19	83	26	22	15	0.3
8-173-015	BB	1.5	23	19	11	21	95	26	19	17	0.4
8-173-02	CC	2.0	29	20	13	26	106	28	20	21	0.7
8-173-03	DD	3.0	32	25	15	29	122	31	25	24	0.9
8-173-05	EE	5.0	40	31	18	37	149	37	31	31	2.0
8-173-07	FF	7.0	51	39	24	47	192	46	39	37	4.0
8-173-11	GG	11.0	62	57	28	58	232	61	57	48	7.0
8-173-15	HH	15.0	72	62	32	66	256	68	62	56	9.4
8-173-22	JJ	22.0	90	81	40	76	318	92	81	68	18.7
8-173-30	KK	30.0	90	83	45	93	357	89	83	76	31.3

* Minimum Ultimate Load is 5 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT