


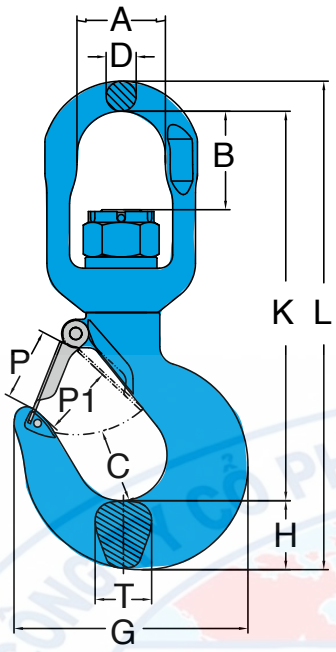

Digital Chip embedded

- Quenched and Tempered Alloy Steel.
- Proof Load tested at 2 times of 5:1 WLL with certification for each batch manufactured.
- Fatigue rated to 20,000 cycles at 1.5 times of 5:1 WLL.
- Magnaflux crack detection is performed 100% on each batch.
- YOKE Swivel Hoist Hooks are Predrilled to accept a YOKE latch kits.

⚠ WARNING INFORMATION:This hook is a positioning device and is not intended to rotate under load. For swivel hooks designed to rotate under load, see 8-175N.

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

Alloy Swivel Hoist Hook

with Brass Washer

Item No.	Hook Feature Code	Working Load Limit	Dimensions (mm)											N.W.
		tonnes*	A	B	C	D	G	H	K	L	P	P1	T	kg
8-175-01	AA	1.0	32	23	25	12	78	19	123	154	26	22	16	0.6
8-175-015	BB	1.5	32	23	25	12	81	23	131	165	24	19	17	0.7
8-175-02	CC	2.0	36	29	26	13	90	27	145	184	24	20	22	1.0
8-175-03	DD	3.0	41	35	29	16	102	29	172	217	28	25	24	1.5
8-175-05	EE	5.0	46	44	38	21	122	38	218	277	35	31	31	3.2
8-175-07	FF	7.0	61	50	49	23	160	48	261	332	43	39	35	5.7
8-175-11	GG	11.0	74	82	62	25	196	56	327	410	61	57	47	9.5
8-175-15	HH	15.0	97	96	65	33	221	64	372	471	72	62	56	16.5
8-175-22	JJ	22.0	123	116	71	51	277	76	469	599	86	81	68	33.4
8-175-30	KK	30.0	123	116	87	51	353	93	503	651	89	83	76	45.9

* Minimum Ultimate Load is 5 times the Working Load Limit.
  Maximun Proof Load is 2 times the Working Load Limit.
* WARNING INFORMATION:This hook is a positioning device and is not intended to rotate under load. For swivel hooks designed to rotate under load, see 8-175N.

⚠ WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.