
Thrust Bearing Swivels

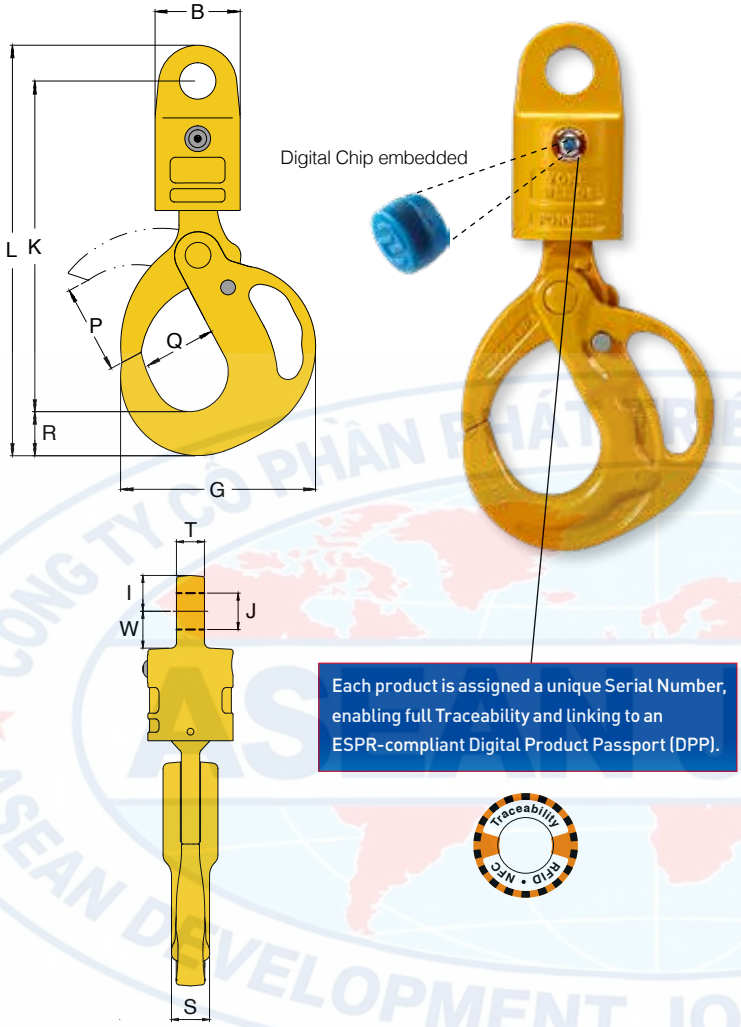

- YOKE's Thrust Roller Bearing Swivels are manufactured using the highest grade of material available.
- YOKE's Thrust Roller Bearing Swivels are designed with a safety factor of 5:1.
- YOKE's Thrust Roller Bearing Swivels are available in sizes from 3 to 10 tons.
- YOKE's Thrust Roller Bearing Swivels are available for wire line 13mm to 22mm.
- YOKE's Thrust Roller Bearing Swivels are coated for corrosion resistance and longer service life.
- YOKE's Thrust Roller Bearing Swivels are manufactured with grease fitting for superior performance.
- YOKE's Thrust Roller Bearing Swivels are designed for low starting torque and high rotation speed.
- All parts of YOKE's Thrust Roller Bearing Swivels are 100% magnaflux crack detected.
- 20,000 cycle fatigue rate to 1.5 times the working load limit.
- All parts of YOKE's Thrust Roller Bearing Swivels come with a batch number for quality certification and traceability.

8-321 Eye & Safe Locking Hook

Thrust Roller Bearing Swivels

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)												N.W.
	mm	tonnes*	B	G	I	J	K	L	P	Q	R	S	T	W	kg
8-321-03	13	3.0	70	156	32	26.0	240	303	47	49	31	27	19	30	4.0
8-321-05	16	5.0	76	174	32	32.5	295	366	80	64	39	34	25	33	7.0
8-321-085	19	8.5	102	213	38	36.0	366	451	113	78	47	39	32	43	12.7
8-321-10	22	10.0	114	251	48	43.0	453	557	132	92	56	54	43	72	21.6

* Design factor 5:1
Proof load is 2 times the WLL.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT