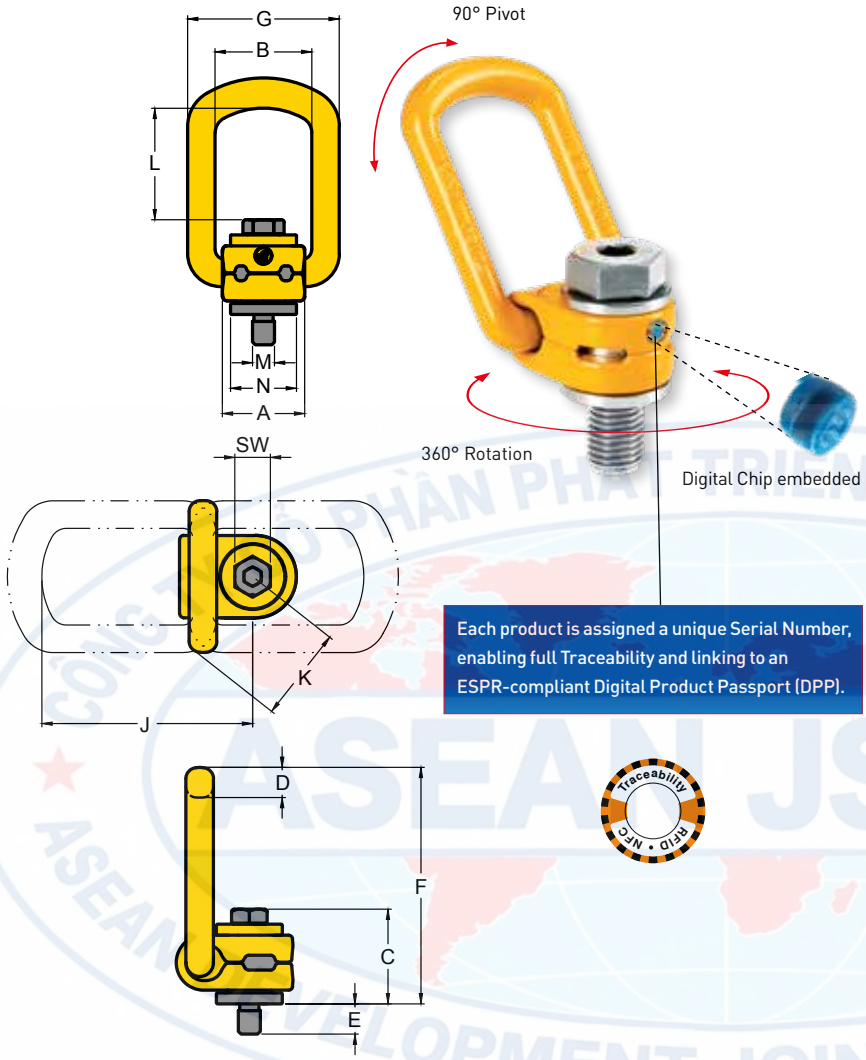


- Rotates through 360° and pivots 90°.
- Manufactured from alloy steel, quenched and tempered.
- Tested in accordance with EN 1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolts are UNC thread.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.

» United States Patent: 10607128
» UK Patent: 3627396
» German Patent: 602018032891.2
» Italy Patent: 3627396
» Japan Patent: 3219858

» China Patent: ZL 2012 1 0131962.1
» Taiwan Patent: I468602

Lifting Point

UNC Thread (8-212)

Item No.	Working Load Limit	Thread version			Dimensions											Torque in	N.W.
		M	E	TPI	A	B	C	D	F	G	SW	J	K	L	N		
	lbs	inch	inch		inch											ft-lbs	lbs
8-212-010	2,200	1/2	0.94	13UNC	1.30	1.48	1.73	0.53	3.90	2.24	3/4	3.49	1.49	1.62	1.22	73	1.0
8-212-015	3,300	5/8	1.14	11UNC	1.30	1.48	1.81	0.53	3.90	2.24	15/16	3.49	1.49	1.56	1.22	110	1.3
8-212-020	5,500	3/4	1.46	10UNC	1.97	2.13	2.16	0.65	5.62	3.22	1 1/8	5.23	2.09	2.77	1.93	185	2.9
8-212-025	5,500	7/8	1.46	9UNC	1.97	2.13	2.24	0.65	5.62	3.22	1 5/16	5.23	2.09	2.69	1.93	221	2.8
8-212-040	8,800	1	1.61	8UNC	1.97	2.13	2.34	0.65	5.62	3.22	1 1/2	5.23	2.09	2.63	1.77	295	4.3
8-212-050	11,000	1 1/4	2.11	7UNC	2.36	2.56	3.21	0.89	6.70	3.90	1 7/8	6.00	2.53	2.60	2.32	368	6.8
8-212-080	17,000	1 1/2	2.44	6UNC	3.03	3.35	4.01	1.04	8.85	4.88	2 1/4	8.04	3.15	3.80	2.72	585	12.9
8-212-150	33,000	1 3/4	2.60	5UNC	3.74	4.09	4.41	1.42	10.16	6.22	2 5/8	9.07	3.88	4.33	3.86	1,107	24.5
8-212-200	44,000	2	2.80	4.5UNC	3.74	4.09	4.72	1.42	10.24	6.22	3	9.07	3.88	4.09	3.86	1,476	27.2

* Design Factor 4:1

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.