


Thrust Bearing Swivels



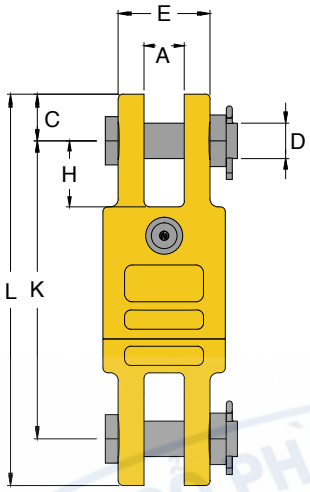

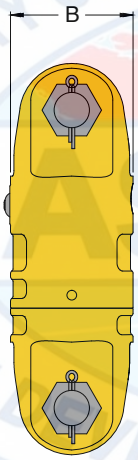

Each product is assigned a unique Serial Number, enabling full Traceability and linking to an ESPR-compliant Digital Product Passport (DPP).

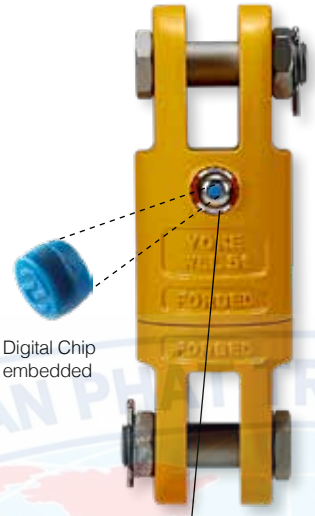

- YOKE's Thrust Roller Bearing Swivels are manufactured using the highest grade of material available.
- YOKE's Thrust Roller Bearing Swivels are designed with a safety factor of 5:1.
- YOKE's Thrust Roller Bearing Swivels are available in sizes from 3 to 10 tons.
- YOKE's Thrust Roller Bearing Swivels are available for wire line 13mm to 22mm.
- YOKE's Thrust Roller Bearing Swivels are coated for corrosion resistance and longer service life.
- YOKE's Thrust Roller Bearing Swivels are manufactured with grease fitting for superior performance.
- YOKE's Thrust Roller Bearing Swivels are designed for low starting torque and high rotation speed.
- All parts of YOKE's Thrust Roller Bearing Swivels are 100% magnaflux crack detected.
- 20,000 cycle fatigue rate to 1.5 times the working load limit.
- All parts of YOKE's Thrust Roller Bearing Swivels come with a batch number for quality certification and traceability.

8-323 Jaw & Jaw

Thrust Roller Bearing Swivels

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)								N.W.
	mm	tonnes*	A	B	C	D	E	H	K	L	kg
8-323-03	13	3.0	22.5	70	25.5	19.0	41.5	33.5	156	207	3.7
8-323-05	16	5.0	25.0	76	29.0	22.0	57.0	41.0	185	243	5.7
8-323-085	19	8.5	40.0	102	35.0	25.4	72.0	54.0	226	296	10.7
8-323-10	22	10.0	44.0	114	44.0	38.0	86.0	89.0	314	402	19.7

* Design factor 5:1
Proof load is 2 times the WLL.

Copyright © 2026
YOKE Industrial Corp.
All Rights Reserved.

WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT